



ISO/IEC17025 Accredited Lab.

Report No: EMC1409094-02

File reference No: 2014-09-30

Applicant:

Product: Shower Bluetooth Speaker

Brand Name: ILE

Model No: BTS-51

Test Standards: ETSI EN301 489-1 V1.9.2
(2011-09)
ETSI EN301 489-17 V2.2.1
(2012-09)

Test result: The EMC testing has been performed on the submitted samples and found in compliance with council EMC Directive 2004/108/EC and R&TTE Directive 1999/5/EC

Approved By

Jack Chung

Jack Chung

EMC Manager

Dated: Sep 30, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205-02.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Table of Contents

1.0	General Details	4
1.1	Notes	4
1.2	Test Lab Details	4
1.3	Details of Applicant	4
1.4	Application Details	4
1.5	Test Item	5
1.6	Equipment Classification	5
1.7	List of Ports	5
1.8	Ancillary and Peripheral Devices	5
1.9	Test Standards	6
1.10	Test By	6
2.0	Technical Test	7
2.1	Summary of Test Result	7
2.2	Test Report	7
	Clause 8.2 Emission Test- Radiated Emissions	10
	Clause 8.4 AC Line Conducted Emissions	13
	Clause 8.5 Harmonic Current Emissions	16
	Clause 8.6 Flicker and Voltage Fluctuation	18
	Clause 9.2 Immunity Test- Radiated, RF Electromagnetic Fields	21
	Clause 9.3 Electrostatic Discharge	22
	Clause 9.4 Fast Transient Common Mode	23
	Clause 9.5 RFI Common Mode	24
	Clause 9.7 Voltage Dips	25
	Clause 9.8 Surge Common & differential Mode (1-phase)	26
3.0	CE Label	27
4.0	Photograph-Test Set up	28
4.1	Photograph-Conducted & Radiated Emission Test Set up	28
4.2	Photograph-Radiated Immunity Test Set up	29
5.0	Photograph-EUT	29
6.0	Test Equipments	30

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The TIMEWAY Lab does not assume Responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the TIMEWAY Lab.

1.2 Testing Laboratory

SHENZHEN TIMEWAY TESTING LABORATORIES

East 5/Block 4, Anhua Industrial Zone, No.8,Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA

Tel: +86 755 83448688 Fax :+86 755 83442996

Internet: www.timewaytech.com

Site on File With the Federal Communications and Commission – United States

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.3 Details of Applicant

Name:

Address:

1. 4 Application Details

Date of Receipt of Application: Sep 11, 2014

Date of Receipt of Test Item: Sep 11, 2014

Date of Test: Sep 11, 2014~ Sep 29, 2014

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1.5 Test Item

Manufacturer:

Address:

Brand Name: N/A

Model No.: BTS-51

Additional Model No.: ILE

Additional Brand Name: N/A

Description: Shower Bluetooth Speaker

Additional Information

Frequency: 2402-2480MHz

Number of Channels: 79

Antenna Designation: PCB antenna, and the maximum Gain of this antenna is 0dBi

Type of Modulation: GFSK, $\pi/4$ QPSK, 8DPSK

Extreme Temp. Tolerance: -20°C to 55°C

Note: Classification according to CEPT/ERC Recommendation 70-03 & ETSI EN301 489-17 V2.2.1 (2012-09)

1.6 Equipment Classification

Equipment Category: 3

1.7 List of Ports

Port	Description	Classification ¹	Maximum cable Length	Cable Type
N/A				

Note ¹ports shall be classified as ac power, dc power or signal/control port.

²Maximum cable length corresponding to the appropriate ports shall be classified as $\leq 3m$ or $> 3m$.

1.8 Ancillary and Peripheral Devices

Description	Designation	Serial No.	Manufacturer
N/A	-		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



List of Peripheral Devices Used for Testing

Description	Designation	Serial No.	Manufacturer
N/A			

Note: An Equipment (apparatus) used in connection with a receiver or transmitter is considered as an ancillary Equipment (apparatus) if:

- The equipment is intended for use in conjunction with a receiver or transmitter to provide additional operational and/or control features to the radio equipment. (e.g. to extend control to another position or location); and
- The equipment cannot be used on a stand alone basis to provide user functions independently of a receiver or transmitter; and
- The receiver or transmitter to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

1.9 Test Standards

ETSI EN301 489-1 V1.9.2 (2011-09)
Electromagnetic compatibility and Radio spectrum Matters (ERM);
Electromagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements
ETSI EN301 489-17 V2.2.1 (2012-09)
Electromagnetic compatibility and Radio spectrum Matters (ERM);
Electromagnetic Compatibility (EMC) standard for radio equipment and services;
Part 17: Specific conditions for 2.4GHz wideband transmission systems and 5GHz high performance RLAN equipment

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

1.10 Test or Witness Test Engineering

Test By: _____

Printing Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



2. Technical Test

2.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "Passed" if all Measurements are "Passed")	Pass

2.2 Test Report

Emission (EMI)

EMI Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Conducted Interference Voltage	AC Mains	ETSI EN 301489-1: 2011-09 Clause 8.4	EN 55022:2010 +AC: 2011	Refer to Section 4	Complies	Applicable
Radiated Interference Field Strength 30~1000MHz	Enclosure	ETSI EN 301489-1: 2011-09 Clause 8.2	EN 55022:2010 +AC:2011	Refer to Section 4	Complies	Applicable
Harmonic Current Emissions	AC Mains Input Port	ETSI EN 301489-1: 2011-09 Clause 8.5	EN 61000-3-2:2006 + A1: 2009 +A2:2009	Refer to Section 4	Complies	Not Applicable
Flicker & Voltage Fluctuation	AC Mains Input Port	ETSI EN 301489-1: 2011-09 Clause 8.6	EN 61000-3-3:2013	Refer to Section 4	Complies	Not Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Immunity (EMS)

EM3 Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Electronic Discharge (ESD)	Enclosure	ETSI EN 301489-1: 2011-09 Clause 9.3	EN 61000-4-2: 2009	Refer to Section 4	Complies	Applicable
RF-Electro-Magnetic Field (80-1000MHz) And 1400-2700MHz)	Enclosure	ETSI EN 301489-1: 2011-09 Clause 9.2	EN 61000-4-3: 2006	Refer to Section 4	Complies	Applicable
Fast Transients, Burst	Power Line AC/DC	ETSI EN 301489-1: 2011-09 Clause 9.4	EN 61000-4-4: 2004 +A1:2010	Refer to Section 4	Complies	Not Applicable
Surge	Power Line (1 phase)	ETSI EN 301489-1: 2011-09 Clause 9.6	EN 61000-4-5: 2006	Refer to Section 4	Complies	Not Applicable
Transients & Surge Vehicular Environment	Power Line (Car Charge)	ETSI EN 301489-1: 2011-09 Clause 9.8	ISO 7637-1/2:1990 (12/124VDC)	N/A	Complies	Not Applicable
RF Common Mode (0.15-80MHz)	Power Line AC/DC signal Lines	ETSI EN 301489-1: 2011-09 Clause 9.5	EN 61000-4-6: 2009	Refer to Section 4	Complies	Not Applicable
Vol. Dips, Interruptions& Fluctuations (AC Power)	Input& Output AC Ports only	ETSI EN 301489-1: 2011-09 Clause 9.7	EN 61000-4-11 2004	Refer to Section 4	Complies	Not Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



N/A=Not Applicable

-Performance criteria A for immunity tests with phenomena of a continuous nature;

Communication between the BTS-51 and other Bluetooth device in the front of pings should not drop during the test.

-Performance criteria B for immunity tests with phenomena of a transient nature;

N/A

-Performance criteria C for immunity tests with power interruptions exceeding a certain time.

N/A

Note: For details see subclause 6.1 ETSI EN 301 489-17

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.2 Emission Test – Radiated Emission

This test assesses that ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

According to EMC basic standard (EN 55022)

Measurement according to EMC basic standard, The test results correspond to the 3m Semi-Anechoic Chamber results.

The EUT and its simulators are placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to EN55022: 2010 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1 GHz using a receiver bandwidth of 120kHz.

Radiated Emission was performed at an antenna to EUT distance of 3 meters.

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or other persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Emission Test

Block diagram of Test setup

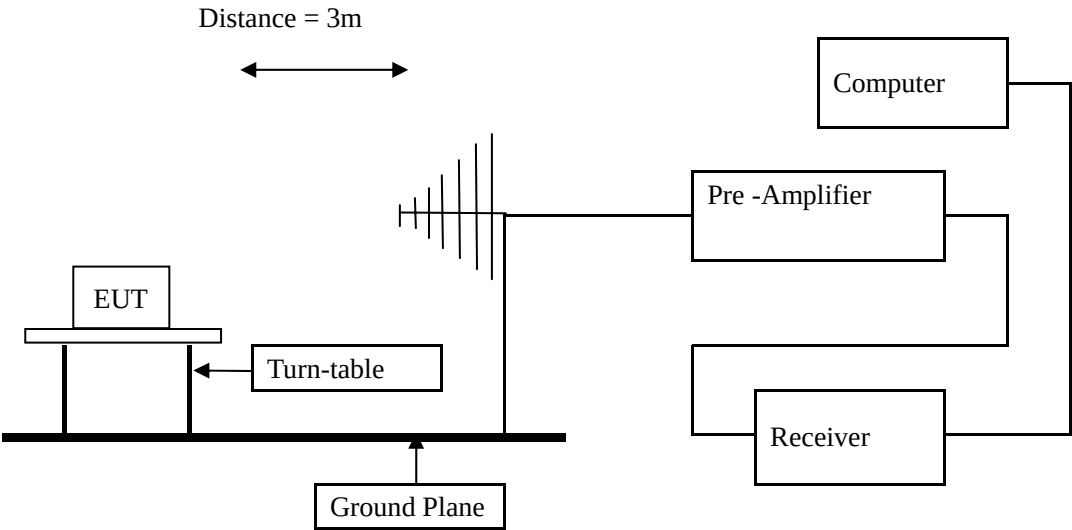

Power line conducted Emission Limit

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)
30-230	10/3	30.0/40.0
230-1000	10/3	37.0/47.0
1000-3000	3	50 (AV) /70 (PK)
3000-6000	3	54 (AV) /74 (PK)

Note: The lower limit shall apply at the transition frequencies

Test result

Please refer to following table

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



EUT	Shower Bluetooth Speake	Model	BTS-51
Mode	Normal work	Input Voltage	DC3.7V
Temperature	23 deg. C,	Humidity	56% RH

Note:

1. The worst case is submitted in the test report.
2. The receiver Radiated Emission was done with different settings, using the relevant and pre-amplifiers for the relevant frequency ranges.

f (MHz)	Band- Width (kHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--

Margin Value= Emission Level- Limit Value

Test Uncertainly: 4.7dB

Note: the test item not applicable to the EUT, because the test item is applicable to the enclosure of ancillary equipment

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.4 AC Line Conducted Emissions

According to EMC Basic Standard (EN 55022 [7] Class-B)

1. For the table top EUT the distance to the reference ground plane (wall) should be 40 cm.
2. AC input line plugged into LISN.

Results

Power Line (L, N)	EUT Operating mode or operating mode no.	Detector (Peak, AV, QP)	Additional (scan-) Information (e.g. Pre-test Fast scan, Maxhold, Final measurement.)	Result (Passed / Failed)
L=>GND	--	QP & AV	Tx Operating Normal	Pass
N=>GND	--	QP & AV	Tx Operating Normal	Pass

The frequency spectrum from 0.15MHz to 30MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz

. Temperature: 25°C
. Humidity: 53% RH

Note: the worse cases was selected to conducted the test

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

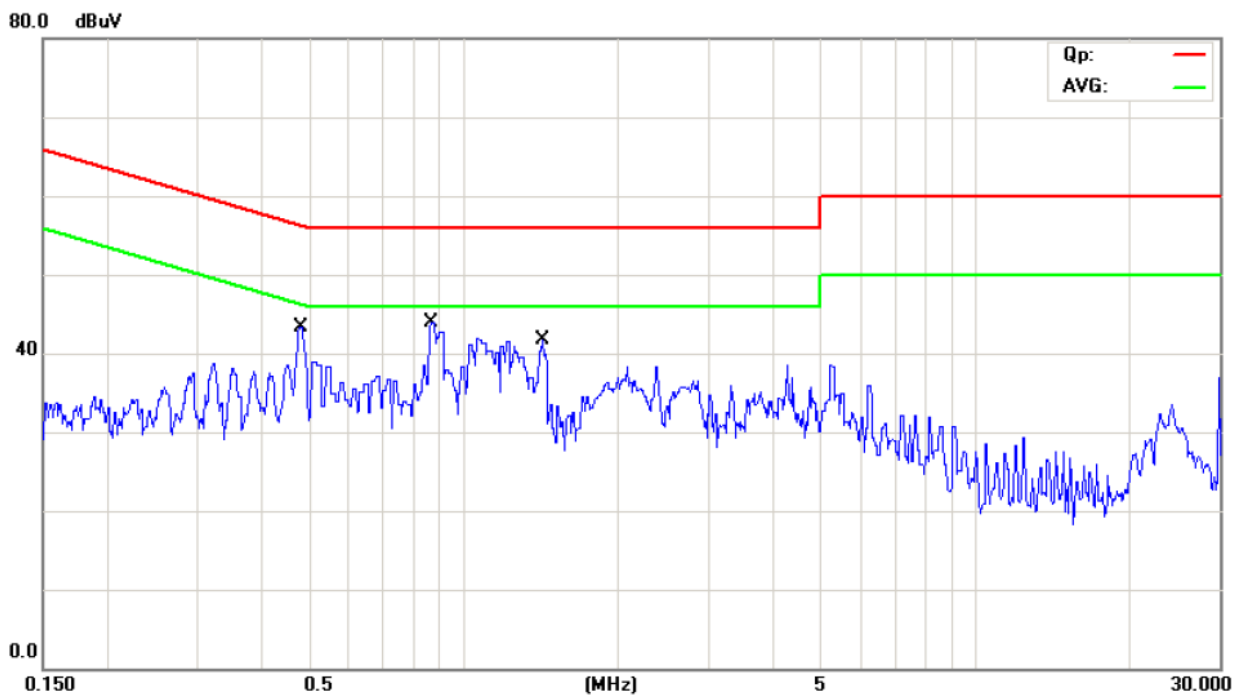

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4788	29.10	11.35	40.45	56.36	-15.91	QP	
2		0.4788	22.90	11.35	34.25	46.36	-12.11	AVG	
3		0.8675	31.40	11.76	43.16	56.00	-12.84	QP	
4	*	0.8675	24.40	11.76	36.16	46.00	-9.84	AVG	
5		1.4127	21.90	12.07	33.97	56.00	-22.03	QP	
6		1.4127	9.60	12.07	21.67	46.00	-24.33	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

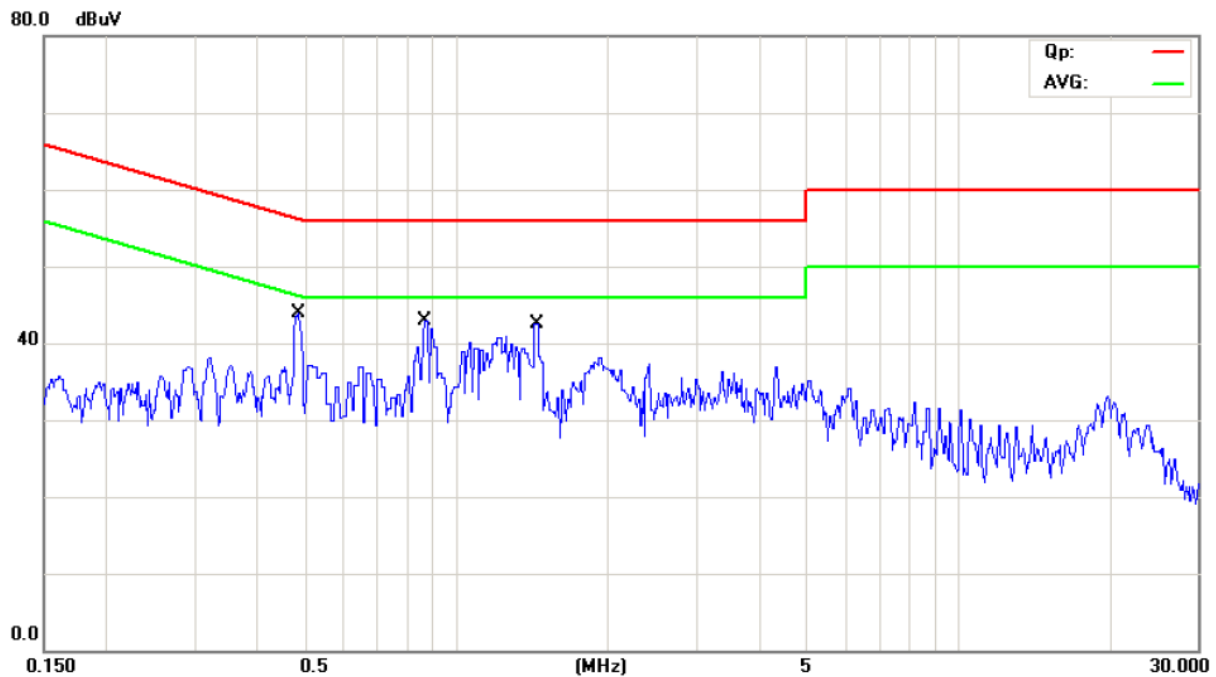

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4795	30.00	11.35	41.35	56.35	-15.00	QP	
2	*	0.4795	22.80	11.35	34.15	46.35	-12.20	AVG	
3		0.8673	29.90	11.76	41.66	56.00	-14.34	QP	
4		0.8673	19.90	11.76	31.66	46.00	-14.34	AVG	
5		1.4206	20.30	12.07	32.37	56.00	-23.63	QP	
6		1.4206	0.90	12.07	12.97	46.00	-33.03	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.5 Harmonic Current Emissions

This test was performed as per EMC Basic Standard EN61000-3-2 (Dec-2000)

EUT Operating Mode

Normal work

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Communication with Bluetooth	N/A

Table 1 - Limit of Harmonics Current Measurement	
Limits for Class A equipment	
Harmonics order (n)	Max. permissible harmonics current (A)
Odd harmonics	
3	2.3
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15≤n≤39	0.15 x 15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8≤n≤40	0.23 x 8/n

Note:

- For Class A equipment, the harmonics of the input current shall not exceed the absolute values given in table 1.
- For Class B equipment, the harmonics of the input current shall not exceed the values given in table 1 multiplied by factor of 1, 5.

Table 2 - Limit of Harmonics Current Measurement	
Limits for Class C equipment	
Harmonics order (n)	Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency (A)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Odd harmonics only	
2	2
3	$30 \times \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$	3

Note: The harmonic current limits of lighting equipment shall not exceed the relative limits given in table 2.

Table 3 - Limit of Harmonics Current Measurement		
Limits for Class D equipment		
Harmonics order (n)	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
Odd harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$13 \leq n \leq 39$	$3.85/n$	See table 1
$11 \leq n \leq 39$	3	

Note: The harmonic of the input current shall not exceed the values that can be derived from table 3.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The EUT is classified as follows:
 - Class A Balanced three-phase equipment and all other equipment, except that stated in one of the following classes.
 - Class B Portable tools.
 - Class C Lighting equipment, including dimming devices.
 - Class D Equipment having an input current with “special wave shape” and an active input power, $P \leq 600W$

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.6 Flicker and Voltage Fluctuation

This test was performed as per EMC Basic Standard EN 61000-3-3: 2013

EUT Operating Mode

Normal work

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Communication with Bluetooth	N/A

Limits of Voltage Fluctuation and Flicks Measurement

Test Item	Limit	Note
P_{st}	1.0	Pst means short-term flicker indicator
P_{lt}	0.65	Plt means long-term flicker indicator
T_{dt} (ms)	200	Tdt means maximum time that dt exceeds 3%.
d_{max} (%)	4	Dmax means maximum relative voltage change.
dc (%)	3	Dc means relative steady-state voltage change.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT 10 minutes and the observation period for long-term flicker indicator is 2 hours.

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.2 Immunity Test – Radiated, RF Electromagnetic Field

According to EMC Basic Standard (EN 61000-4-3[9])

Tx Operating Mode: Communication with Bluetooth

Type of Port: Enclosure

Performance Criterion: CT/CR

The distance between the turn-table axis and Tx&Rx-antenna is 3m.

Field strength = 3V/m

Start Frequency = 80MHz Stop Frequency = 1000MHz and

Start Frequency = 1400MHz Stop Frequency = 2700MHz

Frequency Step = lin 1MHz

The test signal is amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1000 Hz

Results

Frequency (MHz)	Antenna Polarity	Radiation to	Reaction of the EUT During and after test	Result
80-1000, 1400-2700	Horizontal	Front	No reactions recognized	Pass
80-1000, 1400-2700	Vertical	Front	No reactions recognized	Pass
80-1000, 1400-2700	Horizontal	Rear	No reactions recognized	Pass
80-1000, 1400-2700	Vertical	Rear	No reactions recognized	Pass
80-1000, 1400-2700	Horizontal	Left	No reactions recognized	Pass
80-1000, 1400-2700	Vertical	Left	No reactions recognized	Pass
80-1000, 1400-2700	Horizontal	Right	No reactions recognized	Pass
80-1000, 1400-2700	Vertical	Right	No reactions recognized	Pass

Note: Performance criteria A observed.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with The calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.3 Electrostatic Discharge

According to EMC basic standard (EN61000-4-2[10])

Tx Operating Mode: Communication with Bluetooth

Type of Port: Enclosure, USB Port

Performance Criterion: CT/CR

For the table top EUT the distance to the reference ground plane should be 80 cm.

Direct contact discharge on conducting surfaces of EUT

Indirect air discharge on insulating surfaces of EUT

$\pm 2\text{kV}$, $\pm 4\text{kV}$ direct discharge & $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ air discharge

Test Results

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r Passed	n.r.r Passed	n.r.r Pass
-2kV	n.r.r Passed	n.r.r Passed	n.r.r Pass
+4kV	n.r.r Passed	n.r.r Passed	n.r.r Pass
-4kV	n.r.r Passed	n.r.r Passed	n.r.r Pass
+8kV	-	-	n.r.r Pass
-8kV	-	-	n.r.r Pass

Remarks: n.r.r. = no reaction recognized

Performance Criteria A observed and No any function degraded during the tests.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.4 Fast Transients Common Mode

According to EMC basic standard (EN61000-4-4 [11])

Tx&Rx Operating Mode: Communication with Bluetooth

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

For the table top EUT the distance to the reference ground plane should be 80 cm.

The test level for ac mains power input ports shall be 1KV open circuit.

Test Setup

Burst on Power Line (direct injection)

Test Results

Adjustment on UCS 500 M4: Trigger “AUTO”, Burst length: 15ms					Test Time:	60s for every voltage and polarity		
						120s for every voltage and polarity		
Testing on power Line (direct injection)		Reaction of The Test Object During and after Test						Result
Test Voltage	Repetition Frequency	L1 =>GND (+=>GND)	L2=> GND	L3=> GND	N=> GND	PE=> GND	L1, N, => GND	
-0.5kV	5kHz	--	N/A	N/A	--	N/A	--	N/A
+0.5kV	5kHz	--	N/A	N/A	--	N/A	--	N/A
-1.0kV	5kHz	n.r.r.	N/A	N/A	n.r.r.	N/A	n.r.r.	N/A
+1.0kV	5kHz	n.r.r.	N/A	N/A	n.r.r.	N/A	n.r.r.	N/A

Remarks: n.r.r. = no reaction recognized, N/A = not applicable.

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.5 RF Common Mode

According to EMC basic standard (EN61000-4-6 [10])

Tx Operating Mode: Communication with Bluetooth

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

Start Frequency = 150KHz Stop Frequency = 80MHz

Frequency Step = 50kHz in the range of 150kHz-5MHz

1% increment in the range of 5MHz-80MHz

The test signal is amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1000 Hz

Test Setup

Injection via CDN or BIC clamp

Test Results

Injection On	Injection Via	Reaction of the EUT During and after test	Result
AC input power line	CDN	--	N/A

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.7 Voltage Dips

According to EMC basic standard (EN61000-4-11 [13])

TX at Operating Mode: Communication with Bluetooth

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

For the table top EUT the distance to the reference ground plane should be 80 cm.

The test level shall be- a vol. Reduction of the supply vol. 100% for 10ms, 100% for 20ms , 30% for 500ms

And 100% for 5000ms

Test Results

Voltage Dip:

Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Reaction of EUT during and after Test	Result
0	100%	10ms	0° - 360°	n.r.r- performance criteria A observed	N/A
0	100%	20ms	0° - 360°	n.r.r- performance criteria A observed	N/A
70	30%	500ms	0° - 360°	n.r.r- performance criteria B observed	N/A
Voltage Interceptions:					
Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Reaction of EUT during and after Test	Result
0	100%	5000ms	0° - 360°	n.r.r- performance criteria B observed	N/A

n.r.r- no reaction recognized

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.8 Surges Common & Differential Mode (1-phase)

According to EMC basic standard (EN61000-4-5 [14])

Tx Operating Mode: Communication with Bluetooth

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

For the table top EUT the distance to the reference ground plane should be 80 cm.

1KV open circuit for common mode & 0.5KV open circuit for differential mode.

Test Results

5 pulses for each polarity and test voltage, alternating and negative/positive, triggered in case of AC- powerline: 0°, 45°, 90° 180°, 270°, referred to the line frequency. (L1)

Repetition rate is 1 per min.

Test Voltage	Reaction of the test object during and after test by trigger angle/pulse no.(coupling on DC-lines =>trigger angle not relevant).					Result
	0°/pulse no1, 2	45°/pulse, no.3, 4	90°/pulse, no. 5, 6	180°/pulse, no. 7, 8	270°/pulse, no. 9, 10	
Capacitive coupling on AC line: L1=>N or DC lines lines +=>- (Ri=2 Ω /C =18uF)						
-0.5kV	No reaction	No reaction	No reaction	No reaction	No reaction	N/A
+0.5kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-1.0kV	No reaction	No reaction	No reaction	No reaction	No reaction	N/A
+1.0kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-2.0Kv	No reaction	No reaction	No reaction	No reaction	No reaction	N/A
+2.0kV	Recognized	Recognized	Recognized	Recognized	Recognized	
- kV	N/A	N/A	N/A	N/A	N/A	N/A
+kV						

Note: Due to DC Operation, this test item not applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

3. CE Mark label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.



Mark Location: Rear enclosure

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

4. Photographs – Test Setup

4.1 Photograph – Conducted Test Setup



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.2 Photograph –Radiated Emission Test Setup

N/A

5. Photographs - EUT

Please refer to report EMC1409094-01

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



6.0	Test Equipments				
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2014-08-21	2015-08-20
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2014-08-21	2015-08-20
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2014-08-21	2015-08-20
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2014-08-21	2015-08-20
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2014-08-21	2015-08-20
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2014-08-21	2015-08-20
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2014-08-21	2015-08-20
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2014-08-21	2015-08-20
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2014-08-21	2015-08-20
System Controller	CT	SC100	-	2014-08-21	2015-08-20
Printer	EPSON	PHOTO EX3	CFNH234850	2014-08-21	2015-08-20
FM-AM Signal Generator	JUNG.JIN	SG-150M	389911177	2014-08-21	2015-08-20
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2014-08-21	2015-08-20
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2014-08-21	2015-08-20
Spectrum Analyzer	HAMEG	HM5012	-	-	-
Power Supply	LW	APS1502	-	-	-
5K VA AC Power Source	California Instruments	5001iX	56060	2014-08-21	2015-08-20
CDN	EM TEST	CDN M2/M3	-	2014-08-21	2015-08-20
Attenuation	EM TEST	ATT6/75	-	2014-08-21	2015-08-20
Resistance	EM TEST	R100	-	2014-08-21	2015-08-20

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Electromagnetic Injection Clamp	LITTHI	EM101	35708	2014-08-21	2015-08-20
Inductive Components	EM TEST	MC2630	-	2014-08-21	2015-08-20
Antenna	EM TEST	MS100	-	2014-08-21	2015-08-20
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2014-08-21	2015-08-20
Power Amplifier	AR	150W1000	300999	2014-08-21	2015-08-20
Field probe	Holaday	HI-6005	105152	2014-08-21	2015-08-20
Bilog Antenna	Chase	CBL6111C	2576	2014-08-21	2015-08-20
Loop Antenna	EMCO	6502	00042960	2014-08-21	2015-08-20
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2014-08-21	2015-08-20
3m OATS	--	--	N/A	2014-08-21	2015-08-20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2014-08-21	2015-08-20
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2014-08-21	2015-08-20
Power meter	Anritsu	ML2487A	6K00003613	2014-08-21	2015-08-20
Power sensor	Anritsu	MA2491A	32263	2014-08-21	2015-08-20
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-21	2015-08-20
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-21	2015-08-20
9*6*6 Anechoic	--	--	N/A	2014-08-21	2015-08-20

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.