

EMC Test Report

Report No.: AGC04094190401EE02

PRODUCT DESIGNATION: Bobby tech(wireless charger)

BRAND NAME : N/A

MODEL NAME : P705.251

CLIENT : Xindao B.V.

DATE OF ISSUE : Apr. 30, 2019

STANDARD(S) : Draft EN 301 489-1 V2.2.0 (2017-03) : Draft EN 301 489-1 V2.2.0 (2017-03)

Final Draft EN 301 489-3 V2.1.1 (2017-03)

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 2 of 41

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Apr. 30, 2019	Valid	Initial Release









TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. GENERAL INFORMATION	
2.1. DESCRIPTION OF EUT	5
2.2. OBJECTIVE	
2.3. TEST STANDARDS AND RESULTS	5
2.4. ENVIRONMENTAL CONDITIONS	5
3. TEST MODE DESCRIPTION	6
4. MEASUREMENT UNCERTAINTY	7
5. SUPPORT EQUIPMENT	8
6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	9
7. TEST CONDITIONS AND RESULT	11
7.1. LINE CONDUCTED EMISSION TEST	11
7.2. RADIATED DISTURBANCE MEASUREMENT	15
7.3. HARMONIC CURRENT MEASUREMENT	19
7.4. VOLTAGE FLUCTUATIONS AND FLICK MEASUREMENT	21
8. IMMUNITY TEST	22
8.1. EUT SETUP AND OPERATING CONDITIONS	22
8.2. GENERAL PERFORMANCE CRITERIA	22
8.3. ELECTROSTATIC DISCHARGE IMMUNITY TEST	24
8.4. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST	26
8.5. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	29
8.6. SURGE IMMUNITY TEST	31
8.7. IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS	34
8.8. VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST	36
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	38







1. TEST REPORT CERTIFICATION

THI ICATION
Xindao B.V.
P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Xindao B.V.
P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Xindao B.V.
P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Bobby tech(wireless charger)
N/A
P705.251
Apr. 17, 2019 to Apr. 28, 2019
None
Normal
Pass
AGCRT-EC-EMC

We, Attestation of Global Compliance (Shenzhen) Co., Ltd., hereby certify that the submitted samples of the above item, as detailed in chapter 2.1 of this report, has been tested in our facility. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested By	frik Jong	
	Erik Yang(Yang Jianmin)	Apr. 28, 2019
Reviewed By	Max Zhang	NGC NG
	Max Zhang(Zhang Yi)	Apr. 30, 2019
Approved By	forest ce	
	Forrest Lei(Lei Yonggang) Authorized Officer	Apr. 30, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 5 of 41

2. GENERAL INFORMATION

2.1. DESCRIPTION OF EUT

The EUT is a short range, WIRELESS CHARGER device.

Details of technical specification refer to the description in follows:

Hardware Version	CD-1054P_V1.3
Software Version	V1.0
Operation Frequency range	100-205kHz
Test Frequency	127.6KHz
Number of Channels	1 Channel
Antenna Type	Integral antenna
Power Supply	DC 5V 2A or DC 9V 1.67A by adaptor

2.2. OBJECTIVE

Perform Electro Magnetic Interference (EMI) and Electro Magnetic Susceptibility (EMS) tests for CE Marking.

2.3. TEST STANDARDS AND RESULTS

The EUT has been tested according to ETSI EN 301 489-1 V2.2.0 (2017-03) and ETSI EN 301 489-3 V2.1.1 (2017-03).

	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;	
ETSI EN 301 489-1	Part 1: Common technical requirements; Harmonised Standard covering the	
E 1 31 EN 301 409-1	essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential	
	requirements of article 6 of Directive 2014/30/EU	
	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;	
ETSI EN 301 489-3	Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies	
E 131 EN 301 469-3	between 9 kHz and 246 GHz; Harmonised Standard covering the essential	
	requirements of article 3.1(b) of Directive 2014/53/EU	

2.4. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: -20-55°C - Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 6 of 41

3. TEST MODE DESCRIPTION

NO.	TEST MODE DESCRIPTION	WORST
1	Charging with adaptor at full load	V
2	Charging with adaptor at half load	
3	Charging with adaptor at null load	

I/O Port Information (⊠Applicable □Not Applicable)

I/O Port of EUT					
I/O Port Type Number Cable Description Tested With					
Type-C	1	60			

Note:

- 1. All the above "--" means that EUT has no cable.
- 2. All the cables were provided by AGC Lab.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 7 of 41

4. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 8 of 41

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	specification
Adaptor	XIAOMI	MDY-08-ES	(0)	60
Load	6	/ : O		10W
USB cable	<u> </u>		3 2G	1m unshielded

Note:



¹ All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.



Page 9 of 41

6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China		

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.12, 2018	Jun.11, 2019
LISN	R&S	ESH2-Z5	100086	Aug.28, 2018	Aug.27, 2019

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.12, 2018	Jun.11, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2018	Sep.27, 2019

TEST EQUIPMENT OF POWER HARMONICS / VOLTAGE FLUCTUATION / FLICKER TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Signal Conditioning Unit	Schaffner	CCN1000-1	72431	Aug.28, 2018	Aug.27, 2019
AC Source	Schaffner	NSG1007	56825	Aug.28, 2018	Aug.27, 2019

TEST EQUIPMENT OF SURGE/EFT/DIPSTEST

Description	Manufacture r	Model	S/N	Cal. Date	Cal. Due
EFT、Surge Generator	Schaffner	Modula 6150	34437	Aug.28, 2018	Aug.27, 2019

TEST EQUIPMENT OF ESD TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
ESD Simulator	Schaffner	NSG 438	782	Oct.25, 2018	Oct.24, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 10 of 41

TEST EQUIPMENT OF RS IMMUNITY TEST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
SIGNAL GENERATOR	R&S	E4421B	MY4335160 3	May.15, 2018	May.14, 2019
ANTENNA	SCHWARZBCK	VULB9168	D69250	Aug.28, 2018	Aug.27, 2019
POWER SENSOR	R&S	URV5-Z4	100124	May.15, 2018	May.14, 2019
POWER METER	R&S	NRVD	8323781027	May.15, 2018	May.14, 2019
POWER AMPLIFIER	KALMUS	7100LC	04-02/17-06 -001	Jun.12, 2018	Jun.11, 2019
RF AMPLIFIER	Milmega	AS0104-55_5 5	1004793	Jun.12, 2018	Jun.11, 2019
HORN ANTENNA	ETS LINDGREN	3117	00034609	May.26, 2018	May.25, 2019

TEST EQUIPMENT OF CS IMMUNITY TEST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due		
Power Amplifier	AR	75A250	18464	Jun.12, 2018	Jun.11, 2019		
CDN	ZHINAN	ZN3751	15004	Aug.28, 2018	Aug.27, 2019		
6dB attenuator	JWF	50FHC-006-5 0	N/A	Jun.12, 2018	Jun.11, 2019		
Electromagnetic Injection Clamp	Luthi	EM101	35773	Aug.28, 2018	Aug.27, 2019		
Power Sensor	R&S	URV5-Z4	100124	May.15, 2018	May.14, 2019		
Power Meter	R&S	NRVD	8323781027	May.15, 2018	May.14, 2019		
SIGNAL GENERATOR	R&S	E4421B	MY4335160 3	May.15, 2018	May.14, 2019		





Page 11 of 41

7. TEST CONDITIONS AND RESULT

7.1. LINE CONDUCTED EMISSION TEST


7.1.1 LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz-500kHz	66-56	56-46			
500kHz-5MHz	56	46			
5MHz-30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.1.2. BLOCK DIAGRAM OF TEST SETUP

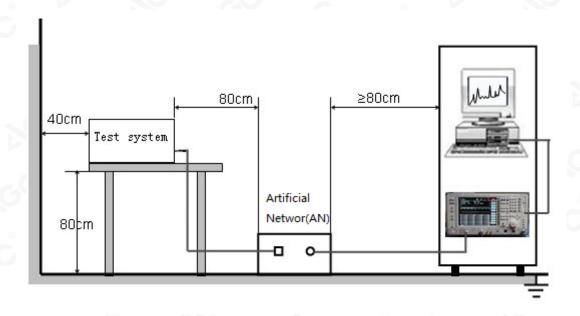





Report No.: AGC04094190401EE02 Page 12 of 41

7.1.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per EN 55032.
- (3) All I/O cables were positioned to simulate typical actual usage as per EN 55032.
- (4) The EUT received DC power from adapter which received AC 230V power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the AN powering the EUT. The AN has two monitoring points: Line 1 (Positive) and Line 2 (Negative). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


 $Add:\ 2/F., Building\ 2, No.1-4, Chaxi\ Sanwei\ Technial\ Industrial\ Park, Gushu,$

Xixiang, Bao'an District, Shenzhen, Guangdong, China



7.1.4. TEST RESULT

LINE CONDUCTED EMISSION TEST-L

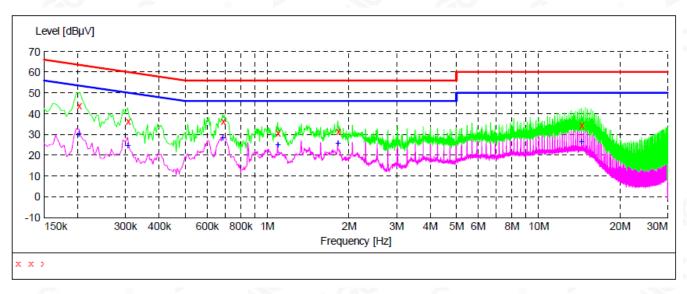

MEASUREMENT RESULT

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.202000 0.306000 0.686000 1.094000 1.822000	43.90 36.50 36.40 30.90 31.70	10.3 10.2 10.3 10.4 10.4	64 60 56 56 56	19.6 23.6 19.6 25.1 24.3	QP QP QP QP QP	L1 L1 L1 L1 L1
14.446000	34.30	10.9	60	25.7	Q̈́Ρ	L1

MEASUREMENT RESULT

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.202000	30.60	10.3	54	22.9	AV	L1
0.306000	24.90	10.2	50	25.2	AV	L1
0.686000	28.40	10.3	46	17.6	AV	L1
1.094000	25.30	10.4	46	20.7	AV	L1
1.822000	25.80	10.4	46	20.2	AV	L1
14.446000	26.80	10.9	50	23.2	AV	L1

RESULT: PASS




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com



LINE CONDUCTED EMISSION TEST-N

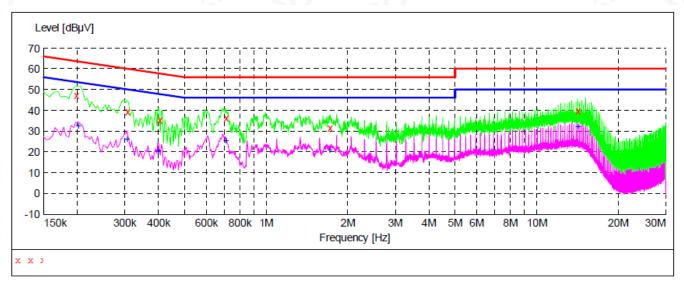

MEASUREMENT RESULT

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000 0.306000	47.20 39.40	10.3	64 60	16.5 20.7	QP	N N
0.402000 0.710000 1.714000	35.20 36.30 31.50	10.3 10.3 10.4	58 56 56	22.6 19.7 24.5	QP QP OP	N N N
14.206000	39.90	10.9	60	20.1	QP	N

MEASUREMENT RESULT

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.202000	32.80	10.3	54	20.7	AV	N
0.306000	26.20	10.2	50	23.9	AV	N
0.398000	20.50	10.3	48	27.4	AV	N
0.710000	25.60	10.3	46	20.4	AV	N
1.714000	21.10	10.4	46	24.9	AV	N
14.206000	32.40	10.9	50	17.6	AV	N

RESULT: PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.



Page 15 of 41

7.2. RADIATED DISTURBANCE MEASUREMENT

7.2.1. LIMITS OF RADIATED DISTURBANCES

Limits for radiated disturbance 30M to1 GHz at a measurement distance of 3 m

Frequency range (MHz)	Quasi peak limits(dBuV/m), for Class B ITE, at 3m measurement distance			
30 - 230	40			
230 - 1000	47			

Limits for radiated disturbance above 1 GHz at a measurement distance of 3 m

Fraguency range (MUz)	Limits (dBuV/m), Class B ITE					
Frequency range (MHz)	Peak	Average				
1000-3000MHz	70	50				
3000-6000MHz	74	54				

Notes


- 1. The lower limit shall apply at the transition frequency.
- 2. Additional provisions may be required for cases where interference occurs.

7.2.2. TEST PROCEDURE

- (1). The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2). The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3). The antenna is a broadband antenna, and its height is varied from 1 to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- (4). For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5). The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10dB margin would be retested one by one using the quasi-peak method.




Xixiang, Bao'an District, Shenzhen, Guangdong, China





7.2.3. BLOCK DIAGRAM OF TEST SETUP

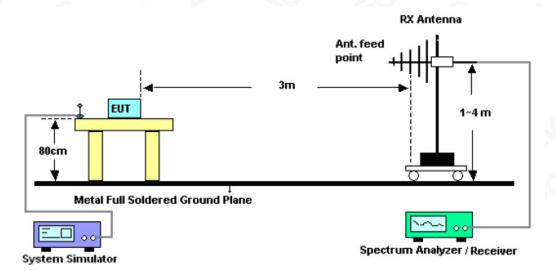

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

7.2.4 TEST RESULT


The test modes were carried out for all modes.

The worst test mode of the EUT was Mode 1, and its test data was showed as the follow:




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






RADIATED EMISSION BELOW 1GHZ-HORIZONTAL

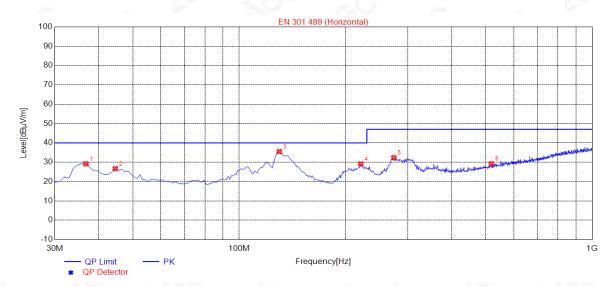

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	29.21	14.16	40.00	10.79	100	0	Horizontal
2	44.5500	26.65	14.82	40.00	13.35	100	18	Horizontal
3	129.9100	35.49	14.14	40.00	4.51	150	231	Horizontal
4	221.0900	29.11	13.37	40.00	10.89	100	308	Horizontal
5	274.4400	32.33	15.79	47.00	14.67	100	321	Horizontal
6	517.9100	29.23	22.55	47.00	17.77	200	150	Horizontal


RESULT: PASS







RADIATED EMISSION BELOW 1GHZ- VERTICAL

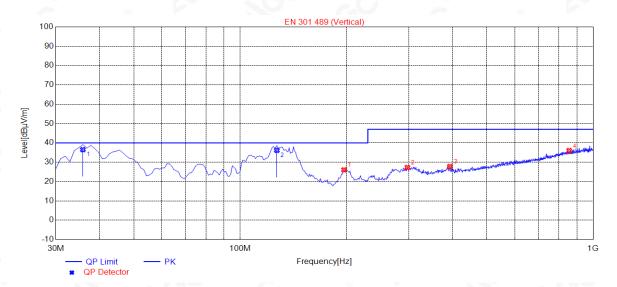

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.8200	13.93	36.51	40.00	3.49	100	76	Vertical
2	127.0000	13.95	36.14	40.00	3.86	100	313	Vertical
3	196.8400	26.02	12.20	40.00	13.98	200	291	Vertical
4	297.7200	27.29	15.94	47.00	19.71	200	3	Vertical
5	392.7800	27.77	19.51	47.00	19.23	150	337	Vertical
6	855.4700	36.00	29.42	47.00	11.00	100	2	Vertical

RESULT: PASS





Page 19 of 41

7.3. HARMONIC CURRENT MEASUREMENT

7.3.1 LIMITS OF HARMONIC CURRENT

Limits for Class A Equipment							
Harmonics Order n Max. permissible harmonic current (A)							
0	Odd harmonics						
3	2.30						
5	1.14						
7	0.77						
9	0.40						
11	0.33						
13	0.21						
15≤n≤39	0.15×15/n						
G .							
2	1.08						
4	0.43						
6	0.30						
8≤n≤40	0.23×8/n						

Note:


- 1. According to section 5 of EN61000-3-2: 2014, the EUT is Class A equipment.
- 2. The above limits are for all applications having an active input power>75W. No limits apply for equipment with an active input power up to and including 75W.

7.3.2 TEST PROCEDURE

- 1. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- 2. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.




Xixiang, Bao'an District, Shenzhen, Guangdong, China





7.3.3 TEST SETUP

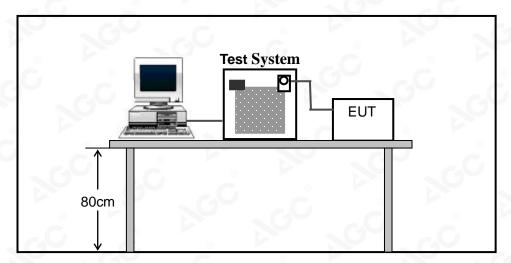

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

7.3.4 TEST RESULT

No limits apply for equipment with an active input power up to and including 75W.



Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com



Page 21 of 41

7.4. VOLTAGE FLUCTUATIONS AND FLICK MEASUREMENT

7.4.1 LIMITS OF VOLTAGE FLUCTUATIONS AND FLICK

Test Item	Limit	Note			
P _{st}	1.0	P _{st} means Short-term flicker indicator			
P _{lt} 0.65		P _{lt} means long-term flicker indicator			
T _{dt} 0.5		T _{dt} means maximum time that d _t exceeds 3%			
d _{max} (%) 4% d _{max} means maximum relative voltage cha		d _{max} means maximum relative voltage change.			
d _c (%) 3.3% d _c means relative steady-state voltage		d _c means relative steady-state voltage change.			

7.4.2 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions
- b. During the flick measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

7.4.3 TEST SETUP

Same as 3.4.3

7.4.4 TEST RESULT

Test Specification

Test Frequency	50Hz	Test Voltage	AC 230V
Waveform	Sine	Test Time	10 minutes(P _{st}); 2 hours (P _{lt})

Test Result

Test Parameter	Measurement Value	Limit	Remarks
P _{st}	0.160	1.0	Pass
P _{lt}	0.070	0.65	Pass
T _{dt(s)}	0.00	500.0	Pass
d _{max} (%)	0.00	4.00	Pass
d _c (%)	0.00	3.30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 22 of 41

8. IMMUNITY TEST

8.1. EUT SETUP AND OPERATING CONDITIONS

The battery was in full voltage and the charger was connected to the EUT to keep the voltage constant during the tests.

Each immunity test was performed according to the requirements of the standard.

8.2. GENERAL PERFORMANCE CRITERIA

1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence.

Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

4. Performance criteria for Transient phenomena applied to Receiver (TR)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.



Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 23 of 41

5. Performance Table

	Performance criteria						
Criteria	During Test	After Test					
A	Shall operate as intended. May show degradation of performance. Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of stored data or user programmable functions.					
В	May show loss of function (one or more). May show degradation of performance. No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance. Shall be no loss of stored data or user programmable functions.					
С	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance.					





Page 24 of 41

8.3. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.3.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-2
Discharge Impedance	330Ω / 150 pF
Discharge Voltage	Air Discharge:8 kV , Contact Discharge:4 kV
Polarity	Positive / Negative
Number of Discharge	Minimum 20 times at each test point
Discharge Mode	Single discharge
Discharge Period	1-second minimum


8.3.2 TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-2:

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5mx0.5m) was placed vertically to and 0.1 meters from the EUT.




Xixiang, Bao'an District, Shenzhen, Guangdong, China





8.3.3 TEST SETUP

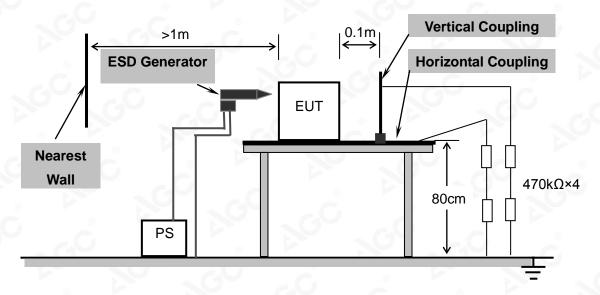

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

8.3.4 TEST RESULT **TEST PROCEDURE**

Please refer to ETSI EN 301 489-1 Clause 9.3.2 and EN 61000-4-2 for the measurement methods.

Amount of Discharges	Voltage	Coupling	Observation	Result (Criteria meet)
Mini 20 / Point	±2kV;±4kV	contact discharge	TR, TT	Α
Mini 20 / Point	±2kV;±4kV;±8kV	Air Discharge	TR, TT	A
Mini 20 / Point	±4kV	Indirect Discharge HCP	TR, TT	Α
Mini 20 / Point	±4kV	Indirect Discharge VCP	TR, TT	A _C



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 26 of 41

8.4. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST **8.4.1 TEST SPECIFICATION**

OTHER PERSON SERVICE					
Basic Standard	EN 61000-4-3				
Frequency Range 80 MHz - 6000MHz					
Field Strength	3V/m				
Modulation	1 kHz sine wave, 80%, AM modulation				
Frequency Step	1% of fundamental				
Polarity of Antenna	Horizontal and Vertical				
Test Distance	3m				
Antenna Height	1.55m				
Dwell Time 3 seconds					

8.4.2 TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-3.


- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The test signal was 80% amplitude modulated with a 1 kHz sine wave.
- The frequency range was swept from 80 MHz to 6000MHz with the exception of the exclusion band for transmitters, receivers and duplex transceivers. The rate of sweep did not exceed 1.5×10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to d. respond.
- The field strength level was 3V/m.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.



Xixiang, Bao'an District, Shenzhen, Guangdong, China +86-755 2523 4088 E-mail: agc@agc-cert.com Tel: +86-755 2523 4088 Service Hotline: 400 089 2118



8.4.3 TEST SETUP

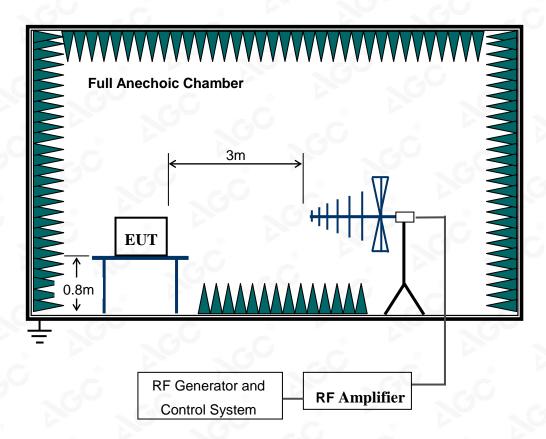

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com



Page 28 of 41


8.4.4 TEST RESULT **TEST PROCEDURE**

Please refer to ETSI EN 301 489-1 Clause 9.2.2, ETSI EN 301 489-3 and EN 61000-4-3 for the measurement

MODE 1 MODE 2 MODE 3

Freq. Range (MHz)	Field	Modulation	Polarity	Position	Observation	Result (Criteria meet)
80-6000	3V/m	Yes	H	Front	CR, CT	Α
80-6000	3V/m	Yes	Н	Back	CR, CT	А
80-6000	3V/m	Yes	Сн	Left	CR, CT	A
80-6000	3V/m	Yes	н	Right	CR, CT	А
80-6000	3V/m	Yes	V	Front	CR, CT	A
80-6000	3V/m	Yes	V	Back	CR, CT	Α
80-6000	3V/m	Yes	V	Left	CR, CT	A
80-6000	3V/m	Yes	V	Right	CR, CT	А







8.5. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST


8.5.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-4
Test Voltage	a.c. power port :1 kV
Polarity	Positive/Negative
Impulse Frequency	5kHz
Impulse wave shape	5/50ns
Burst Duration	15ms
Burst Period	300ms
Test Duration	Not less than 1 min.

8.5.2 TEST PROCEDURE

- The EUT was tested with 1000 volt discharges to the AC power input leads.
- Both positive and negative polarity discharges were applied. b.
- The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- The duration time of each test sequential was 1 minute. d.
- The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

8.5.3 TEST SETUP

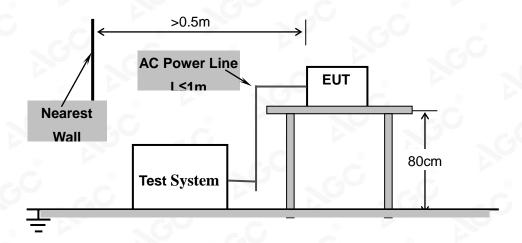

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Page 30 of 41

8.5.4 TEST RESULT

Test Point	Polarity	Test Level (kV)	Observation	Conclusion	
a.c. port, L	+/-	100	TT,TR	Α	
a.c. port, N	+/-	0 1	TT,TR	A	
a.c. port, L-N	+/-	1	TT,TR	A	
a.c. port, L-N	+/-	1 00	TT,TR	Α	



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



Page 31 of 41

8.6. SURGE IMMUNITY TEST

8.6.1 TEST SPECIFICATION


Basic Standard	EN 61000-4-5
Waveform	Voltage 1.2/50 μs; Current 8/20 μs
Test Voltage	a.c. power port, line to ground 2 kV, line to line 1.0 kV
Polarity	Positive/Negative
Phase Angle	0°, 90°, 180°, 270°
Repetition Rate	60sec
Times	5 time/each condition.

8.6.2 TEST PROCEDURE

- a. The EUT and the auxiliary equipment were placed on a table of 0.8m heights above a metal ground reference plane. The size of ground plane is greater than 1mx1m and project beyond the EUT by at least 0.1m on all sides. The ground plane is connected to the protective earth. The length of power cord between the coupling device and the EUT was less than 2 meters (provided by the manufacturer).
- b. The EUT was connected to the power mains through a coupling device that directly couples the surge interference signal. The surge noise was applied synchronized to the voltage phase at the zero crossing and the peak value of the AC voltage wave (positive and negative).
- c. The surges were applied line to line and line(s) to earth. When testing line to earth the test voltage was applied successively between each of the lines and earth. Steps up to the test level specified increased the test voltage. All lower levels including the selected test level were tested. The polarity of each surge level included positive and negative test pulses.




Xixiang, Bao'an District, Shenzhen, Guangdong, China





8.6.3 TEST SETUP

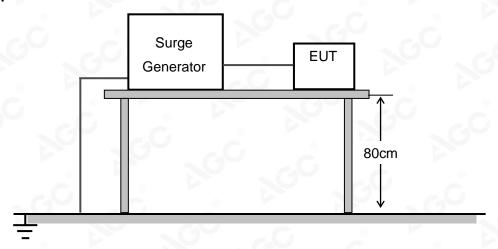

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com




Page 33 of 41

8.6.4 TEST RESULT

Coupling Line	Polarity	Voltage (kV)	Observation	Conclusion	
a.c. power, L-N	+/-	1.0	TT,TR	Α	



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





Page 34 of 41

8.7. IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS


8.7.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-6
Frequency Range	0.15 MHz – 80 MHz
Field Strength	3Vrms
Modulation	1 kHz Sine Wave, 80% AM
Frequency Step	1% of fundamental
Coupled Cable	a.c. power line
Coupling Device	CDN-M2

8.7.2 TEST PROCEDURE

- The EUT shall be tested within its intended operating and climatic conditions.
- b. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- c. The test signal was 80% amplitude modulated with a 1 kHz sine wave
- d. The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80% amplitude. The sweep rate shall not exceed 1.5×10⁻³ decades/s. The step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value where the frequency is swept incrementally.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequencies and harmonics or frequencies of dominant interest, shall be analyzed separately.
- f. Attempts should be made to fully exercise the EUT during test, and to fully interrogate all exercise modes selected for susceptibility.

8.7.3 TEST SETUP

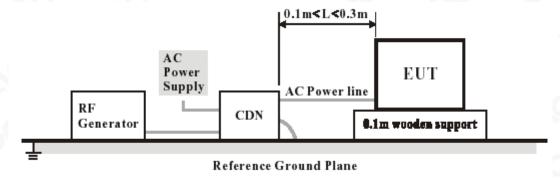

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Page 35 of 41

8.7.4 TEST RESULT

Test Point	Frequency (MHz)	Field Strength (Vrms)	Observation Conclusion	
a.c. port	0.15 – 80	3	CT,CR	А



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



Page 36 of 41

8.8. VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST


8.8.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-11
Voltage Dips	100% reduction, 0.5 Cycle 100% reduction, 1.0 Cycle 30% reduction, 25 Cycles
Voltage Interruptions	100% reduction, 250 Cycles
Voltage Phase Angle	0°, 45°, 90°, 135°, 180°, 225°, 270°, 315°

8.8.2 TEST PROCEDURE

- The power cord was used as supplied by the manufacturer. The EUT was connected to the line output of the Voltage Dips and Interruption Generator.
- The EUT was tested for (1) 100% voltage dip of supplied voltage with duration of 0.5 cycles, (2)100% b. voltage dip of supplied voltage and duration 1.0 cycle. (3) 30% voltage dip of supplied voltage and duration 25 cycles. (4) 100% voltage interruption of supplied voltage with duration of 250 Cycles was followed,
- Voltage reductions occur at 0 degree crossover point of the voltage waveform. The performance of the EUT was checked after the voltage dip or interruption.

8.8.3 TEST SETUP

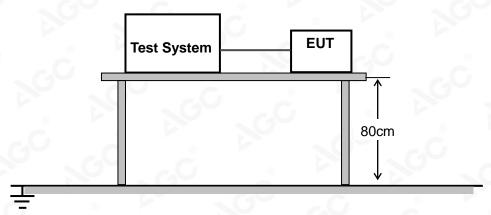

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

E-mail: agc@agc-cert.com Service Hotline: 400 089 2118




Page 37 of 41

8.8.4 TEST RESULT

Test Mode	Voltage Reduction	Duration (cycle)	Times	Interval (Sec)	Observation	Conclusion
	100%	0.5	3	10	TT,TR	A
Voltage dips	100%	1	3	10	TT,TR	A
	30%	25	3	10	TT,TR	Α
Voltage interruptions	100%	250	3	10	TT,TR	А




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





APPENDIX A: PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST SETUP

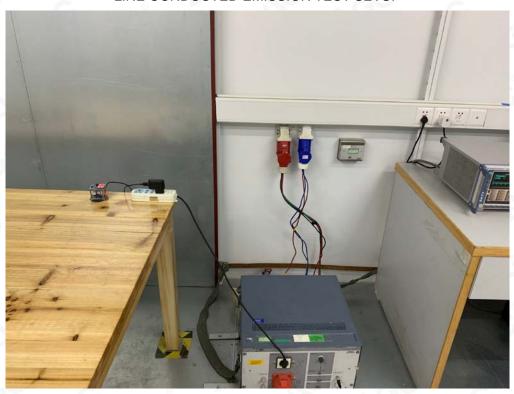


RADIATED EMISSION TEST SETUP






 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






EN 61000-4-2 ESD TEST SETUP

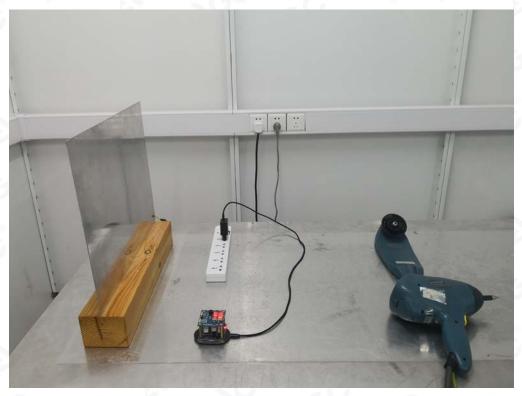


EN61000-3-3 VOLTAGE FLUCTUATION / FLICKER TEST SETUP

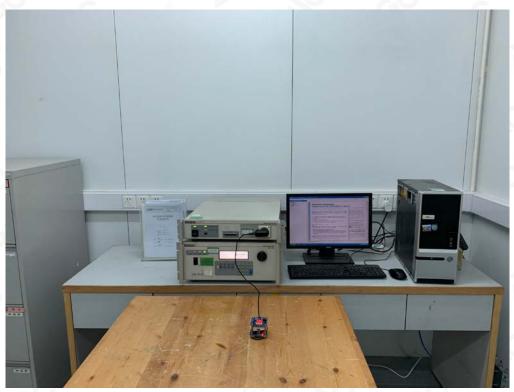




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$






EN 61000-4-3 RS TEST SETUP

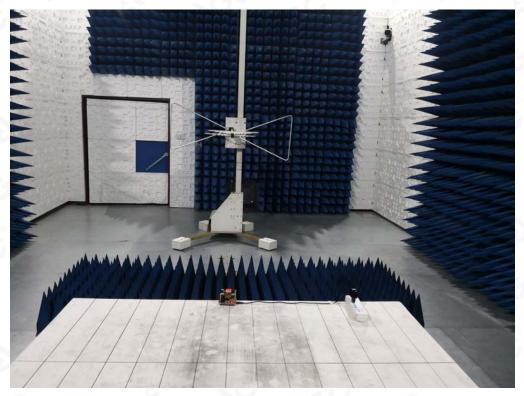


EN 61000-4-6 CS IMMUNITY TEST SETUP

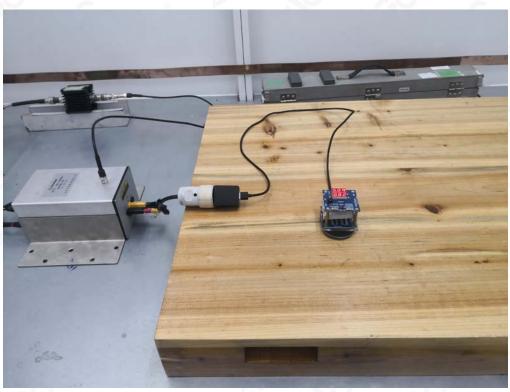




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





EN 61000-4-4/-5/-11 EFT/SURGE/DIPS TEST SETUP

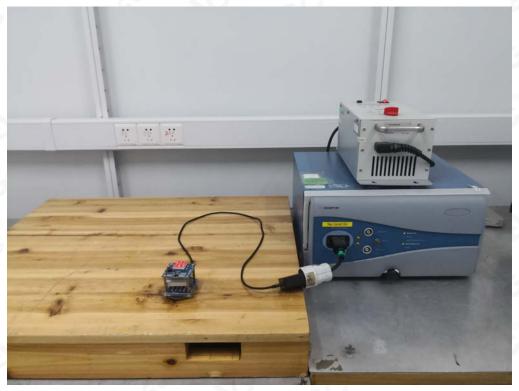

----END OF REPORT----



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$