

# **Test Report**

No. ES141217014CE

(The Submitted Sample Said To Be)

Sample Name : Double USB car charger

Item/Style No. : P302.06
Supplier/Manufacturer : China Etech

Destination : Europe/U.S.A.

Country of Origin : China

Sample Received Date : December 17, 2014
Testing Completed Date : December 23, 2014

Test Requested : As requested by client, to evaluate the compliance of the submitted sample with the

Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Test Method : 1. Review was performed for the sample and the related Bill of Material submitted by the

Applicant.

2. To refer to the standard IEC 62321:2008 Ed.1

- a) Screening by XRF Spectroscopy.
- b) Wet chemical test
  - ) Determination of Lead, Cadmium and Mercury by ICP-OES / AAS.
  - ii) Determination of Hexavalent Chromium by UV-VIS.
  - iii) Determination of PBBs and PBDEs by GC/MS.

Test Results : Please refer to next page (s).

#### **Conclusion:**

Basing on the test results obtained from the homogenous materials, the submitted sample **COMPLIES** with the requirements stated in the Annex II of RoHS Directive 2011/65/EU.

Signed for and on behalf of Shenzhen EMTEK Co., Ltd.





#### **TEST RESULTS:**

No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
		Cd	BL		Non comment	
1	White hard plastic	Pb	BL			
		Hg	BL	Not Tested		
		Cr	BL			
		Br	BL			
		Cd	BL			
		Pb	BL			
2	Silver metal	Hg	BL	Not Tested	Non comment	
		Cr	BL			
		Br	NA			
		Cd	BL			
		Pb	BL			
3	Silver metal	Hg	BL	Not Tested	Non comment	
		Cr	BL			
		Br	NA			
	Silver metal	Cd	BL	Not Tested	Non comment	
		Pb	BL			
4		Hg	BL			
		Cr	BL			
		Br	NA			
		Cd	BL	/ /		
	\ \	Pb	BL			
5	Green PCB	Hg	BL	PBBs: ND PBDEs: ND	Non comment	
		Cr	BL	F DDL3. ND		
		Br	Х			
		Cd	BL	Not Tested	Non comment	
		Pb	BL			
6	Silver metal	Hg	BL			
		Cr	BL			
		Br	NA			
	Silver metal	Cd	BL	Not Tested Non	Non comment	
		Pb	BL			
7		Hg	BL			
		Cr	BL			
		Br	NA			



			1	1	No. ES141217014CE	
No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
8	Transparent soft plastic	Cd	BL			
		Pb	BL		Non comment	
		Hg	BL	Not Tested		
		Cr	BL			
		Br	BL			
		Cd	BL			
	51 1 6 1 1 11	Pb	BL			
9	Black soft plastic with white printing	Hg	BL	Not Tested	Non comment	
	write printing	Cr	BL			
		Br	BL			
		Cd	BL			
		Pb	BL			
10	Grey solid with yellow coating	Hg	BL	Not Tested	Non comment	
	Coding	Cr	BL			
		Br	BL	47 A		
	Copper metal	Cd	BL		Non comment	
		Pb	BL			
11		Hg	BL	Not Tested		
		Cr	BL			
		Br	NA			
		Cd	BL		Non comment	
		Pb	BL	Not Tested		
12	Green soft plastic with gold printing	Hg	BL			
		Cr	BL			
		Br	BL			
		Cd	BL		Non comment	
		Pb	BL			
13	Silver metal	Hg	BL	Not Tested		
		Cr	BL			
		Br	NA			
	Black soft plastic	Cd	BL	Not Tested Non con		
		Pb	BL			
14		Hg	BL		Non comment	
		Cr	BL			
		Br	BL			



	ı	т		No. ES141217014CE	
Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
Silver metal	Cd	BL			
	Pb	BL			
	Hg	BL	Not Tested	Non comment	
	Cr	BL			
	Br	NA			
	Cd	BL			
	Pb	BL			
Brown paper	Hg	BL	Not Tested	Non comment	
	Cr	BL			
	Br	BL			
	Cd	BL			
	Pb	BL			
Bright silver metal	Hg	BL	Not Tested	Non comment	
	Cr	BL			
	Br	NA			
Dull silver metal	Cd	BL		Non comment	
	Pb	BL			
	Hg	BL	Not Tested		
	Cr	BL			
	Br	NA			
	Cd	BL		Non comment	
	Pb	BL	DDD ND		
SMD diode	Hg	BL			
	Cr	BL	,,		
	Br	X			
	Cd	BL		Non comment	
IC	Pb	BL			
	Hg	BL	Not Tested		
	Cr	BL			
	Br	BL			
SMD capacitor	Cd	BL	Not Tested Non co	Non comment	
	Pb	BL			
	Hg	BL			
	Cr	BL			
	Br	BL			
	Silver metal  Brown paper  Bright silver metal  Dull silver metal  SMD diode	Substances   Cd   Pb	Sample description   Substances   EDXRF(1)	Sample description   Substances   EDXRF(1)   Testing(2) (mg/kg)	



П		Restricted	Results of	Results of Chemical	No. ES141217014CE
No.	Sample description	substances	EDXRF <sup>(1)</sup>	Testing <sup>(2)</sup> (mg/kg)	Remark
22		Cd	BL		
	SMD resistor	Pb	BL		
		Hg	BL	Not Tested	Non comment
		Cr	BL		
		Br	BL		
		Cd	BL		
		Pb	BL		
23	Silver metal	Hg	BL	Not Tested	Non comment
		Cr	BL		
		Br	NA		
		Cd	BL		
		Pb	BL		
24	Copper metal	Hg	BL	Not Tested	Non comment
		Cr	BL		
		Br	NA		
	White hard plastic	Cd	BL		Non comment
		Pb	BL	DDD 113	
25		Hg	BL	PBBs: ND PBDEs: ND	
		Cr	BL		
		Br	X		
		Cd	BL		
		Pb	BL		
26	SMD capacitor	Hg	BL	Not Tested	Non comment
		Cr	BL		
		Br	BL		
		Cd	BL		Non comment
	SMD resistor	Pb	BL		
27		Hg	BL	Not Tested	
		Cr	BL		
		Br	BL		
	SMD LED	Cd	BL	Not Tested Non co	
		Pb	BL		
28		Hg	BL		Non comment
		Cr	BL		
		Br	BL	7	





					110. 2011121701102
No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark
	Black soft plastic with white printing	Cd	BL		
		Pb	BL	Not Tested Non c	
29		Hg	BL		Non comment
		Cr	BL		
		Br	BL		





- Remark: (1) ① Results are obtained by XRF for primary screening, and further wet chemical testing by ICP-OES / AAS (for Cd, Pb, Hg), UV-VIS (for Cr(VI)) and GC/MS (for PBBs, PBDEs) is recommended to be performed, if an inconclusive result was found (as "X" in below table)(unit: mg/kg).
  - ② OL = Over Limit, BL = Below Limit, X = Inconclusive, NA= Not Applicable.
  - ③ The XRF screening test for RoHS elements The reading may be different to the actual content in the sample be of non-uniformity composition.

Element	Polymer	Metal	Composite Materials
Cd	BL ≤(70-3σ )< X <(130+3σ )≤ OL	BL ≤(70-3σ )< X <(130+3σ )≤ OL	LOD < X <(150+3σ )≤ OL
Pb	BL ≤(700-3σ )< X <(1300+3σ ) ≤ OL	BL ≤(700-3σ )< X <(1300+3σ ) ≤ OL	BL ≤(500-3σ )< X <(1500+3σ )≤ OL
Hg	BL ≤(700-3σ )< X <(1300+3σ ) ≤ OL	BL ≤(700-3σ )< X <(1300+3σ ) ≤ OL	BL ≤(500-3σ )< X <(1500+3σ )≤ OL
Br	BL ≤ (300-3σ )< X	NA	BL ≤ (250-3σ )< X
Cr	BL $\leq$ (700-3 $\sigma$ )< X	BL ≤ (700-3σ )< X	BL ≤ (500-3σ )< X

- (2) ① mg/kg = ppm = 0.0001%, ND = Not Detected (Less than method detection limit.).
  - ② Unit and Method Detection Limit (MDL) in wet chemical test.

Test items	Pb	Cd	Hg	Cr <sup>6+</sup> (Non-metal)	PBBs(single)	PBDEs(single)
Unit	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
MDL	2	2	2	2	5	5

- $^{\circ}$  According to IEC 62321:2008, result on  $Cr^{6+}$  for metal sample is shown as Positive/Negative. Negative = Absence of  $Cr^{6+}$  coating, Positive = Presence of  $Cr^{6+}$  coating. Storage condition and production date of the tested sample are unavailable and thus results of  $Cr^{6+}$  represent status of the sample at the time of testing.
- (3) As specified by client, the related tests were performed only for the sample Photo 1.





# Photo Appendix









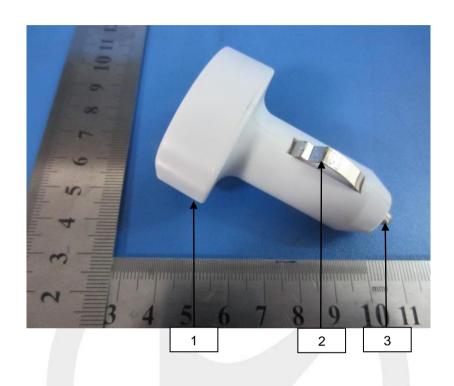

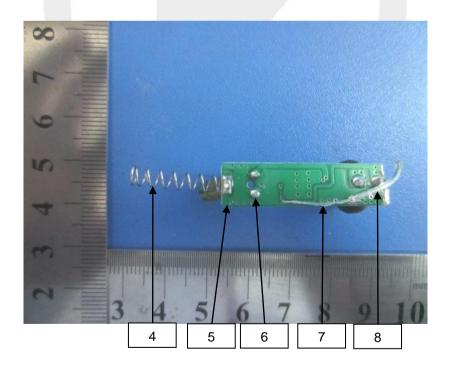





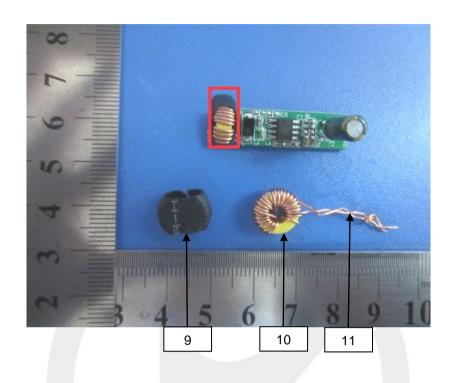

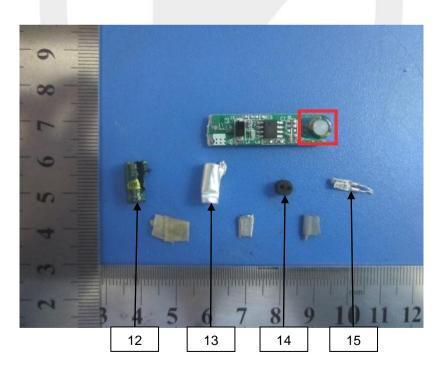





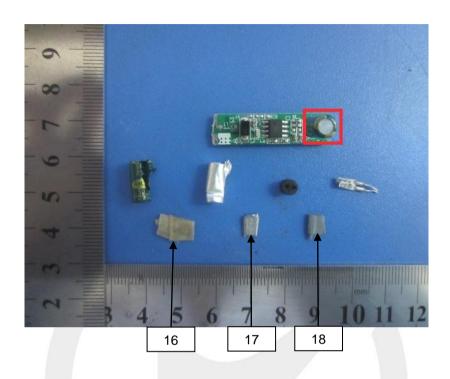

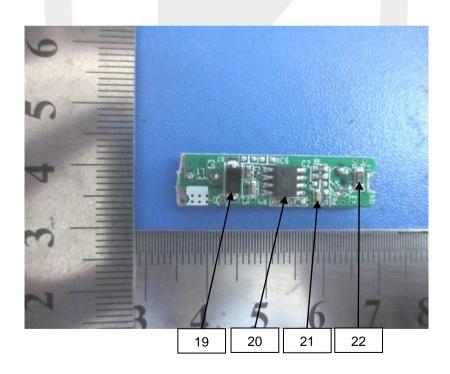



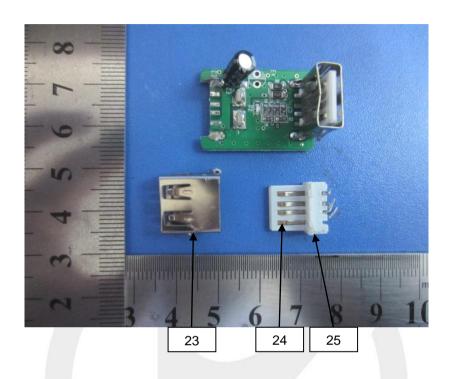

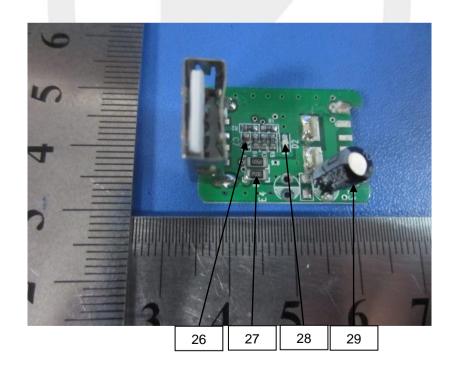

\* \* \* \* \* \* The End \* \* \* \* \*



# **ANNEX**

#### **EXEMPTION LIST**

- 1 Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):
- 1(a) For general lighting purposes < 30W: 5mg (expires on 31 December 2011; 3.5mg may be used per burner after 31 December 2011 until 31 December 2012; 2.5mg shall be used per burner after 31 December 2012)
- 1(b) For general lighting purposes ≥ 30W and <50W: 5mg (expires on 31 December 2011; 3.5mg may be used per burner after 31 December 2011)
- 1(c) For general lighting purposes ≥ 50W and <150W: 5mg
- 1(d) For general lighting purposes ≥ 150W: 15mg
- 1(e) For general lighting purposes with circular or square structural shape and tube diameter ≤17mm (no limitation of use until 31 December 2011; 7mg may be used per burner after 31 December 2011)
- 1(f) For special purposes: 5mg
- 2(a) Mercury in double-capped linear fluorescent lamps for general lighting purples not exceeding (per lamp):
- 2(a)(1) Tri-band phosphor with normal lifetime and a tube diameter < 9mm (e.g. T2): 5mg (expires on 31 December 2011; 4mg may be used per lamp after 31 December 2011)
- 2(a)(2) Tri-band phosphor with normal lifetime and a tube diameter ≥ 9mm and ≤ 17mm (e.g. T5): 5mg (expires on 31 December 2011; 3mg may be used per lamp after 31 December 2011)
- 2(a)(3) Tri-band phosphor with normal lifetime and a tube diameter > 17mm and ≤ 28mm (e.g. T8): 5mg (expires on 31 December 2011; 3.5mg may be used per lamp after 31 December 2011)
- 2(a)(4) Tri-band phosphor with normal lifetime and a tube diameter > 28mm (e.g. T12): 5mg (expires on 31 December 2012; 3.5mg may be used per lamp after 31 December 2012)
- 2(a)(5) Tri-band phosphor with long lifetime (≥ 25000h): 8mg (expires on 31 December 2011; 5mg may be used per lamp after 31 December 2011)
- 2(b) Mercury in other fluorescent lamps not exceeding (per lamp):
- 2(b)(1) Linear halophosphate lamps with tube > 28mm (e.g. T10 and T12): 10mg (expires on 13 April 2012)
- 2(b)(2) Non-linear halophosphate lamps (all diameters): 15mg (expires on 13 April 2016)
- 2(b)(3) Non-linear tri-band phosphor lamps with tube diameter > 17mm (e.g. T9) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 2(b)(4) Lamps for other general lighting and special purposes (e.g. induction lamps) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):
- 3(a) Short length (≤ 500mm) (No limitation of use until 31 December 2011; 3.5mg may be used per lamp after 31 December 2011)
- 3(b) Medium length (> 500mm and ≤ 1500mm) (No limitation of use until 31 December 2011; 5mg may be used per lamp after 31 December 2011)
- 3(c) Long length (> 1500mm) (No limitation of use until 31 December 2011; 13mg may be used per lamp after 31 December 2011)
- 4(a) Mercury in other low pressure discharge lamps (per lamp) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 4(b) Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60:
- 4(b)-l P ≤ 155W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(b)-II 155W < P ≤ 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(b)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(c) Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):
- 4(c)-I P≤ 155W (no limitation of use until 31 December 2011; 25mg may be used per burner after 31 December 2011)
- 4(c)-II 155W < P ≤ 405W (no limitation of use until 31 December 2011; 30mg may be used per burner after 31 December 2011)
- 4(c)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(d) Mercury in High Pressure Mercury (vapour) lamps (HPMV) (expires on 13 April 2015)
- 4(e) Mercury in metal halide lamps (MH)
- 4(f) Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex
- 5(a) Lead in glass of cathode ray tubes
- 5(b) Lead in glass of fluorescent tubes not exceeding 0.2% by weight
- 6(a) Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0.35% lead by weight
- 6(b) Lead as an alloying element in aluminium containing up to 0.4% lead by weight
- 6(c) Copper alloy containing up to 4% lead by weight.
- 7(a) Lead in high melting temperature type solders (i.e. lead based alloys containing 85% by weight or more lead)
- 7(b) Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications
- 7(c)-I Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound
- 7(c)-II Lead in dielectric ceramic in capacitors for a rated voltage of 125V AC or 250V DC or higher



# **ANNEX**

#### **EXEMPTION LIST**

#### Continued

- 7(c)-III Lead in dielectric ceramic in capacitors for a rated voltage of less than 125V AC or 250V DC (expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013).
- 7(c)-IV Lead in PZT based dielectric ceramic materials for capacitors being part of integrated circuits or discrete semiconductors
- 8(a) Cadmium and its compounds in one shot pellet type thermal cut-offs (expires on 1 January 2012 and after that date may be used in spare parts for EEE placed on the market before 1 January 2012)
- 8(b) Cadmium and its compounds in electrical contacts
- 9 Hexavalent chromium as an anti-corrosion agent of the carbon steel cooling system in absorption refrigerators up to 0.75% by weight in the cooling solution
- 9(b) Lead in bearing shells and bushes for refrigerant-containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications
- 11(b) Lead used in other than C-press compliant pin connector systems (expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013)
- 13(a) Lead in white glasses used for optical applications
- 13(b) Cadmium and lead in filter glasses and glasses used for reflectance standards
- Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80% and less than 85% by weight (expires on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011)
- 15 Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit Flip Chip packages
- 16 Lead in linear incandescent lamps with silicate coated tubes (expires on 1 September 2013)
- 17 Lead halide as radiant agent in High Intensity Discharge (HID) lamps used for professional reprography applications
- 18(a) Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as speciality lamps for diazoprinting reprography, lithography, insect traps, photochemical and curing processes containing phosphors such as SMS ((Sr,Ba)<sub>2</sub>MqSi<sub>2</sub>O<sub>7</sub>:Pb) (expires on 1 January 2011)
- 18(b) Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi<sub>2</sub>O<sub>5</sub>:Pb)
- Lead with PbBiSn-Hg and PbInSn-Hg in specific compositions as main amalgam and with PbSn-Hg as auxiliary amalgam in very compact Energy Saving Lams (ESL) (expire on 1 June 2011)
- 20 Lead oxide in glass used for bonding front and rear substrates of flat fluorescent lamps used for Liquid Crystal Displays (LCDs) (expires on 1 June 2011)
- Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glass
- Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors
- Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring
- 26 Lead oxide in the glass envelope of Black Light Blue (BLB) lamps (expires on 1 June 2011)
- 29 Lead bound in crystal glass as defined in Annex 1 (Categories 1, 2, 3 and 4) of Council Directive 69/493/EEC
- 30 Cadmium alloys as electrical/mechanical solder joints to electrical conductors located directly on the voice coil in transducers used in high-powered loudspeakers with sound pressure levels of 100 dB (A) and more
- Lead in soldering materials in mercury free flat fluorescent lamps (which e.g. are used for liquid crystal displays, design or industrial lighting)
- 32 Lead oxide in seal frit used for making window assemblies for Argon and Krypton laser tubes
- 23 Lead in solders for the soldering of thin copper wires of 100 µm diameter and less in power transformers
- 34 Lead in cermet-based trimmer potentiometer elements
- 37 Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body
- 38 Cadmium and cadmium oxide in thick film pastes used on aluminium bonded beryllium oxide
- 39 Cadmium in colour converting II-VI LEDs (< 10 μg Cd per mm² of light- emitting area) for use in solid state illumination or display systems (expires on 1 July 2014)
- 40 Cadmium in photoresistors for analogue optocouplers applied in professional audio equipment.