

# Test Report

Report No.: MTi180919E094

Date of issue: Sept. 27, 2018

Sample Description: Ontario wireless charger with speaker

Model(s): P308.873, P308.87

Applicant:

Address:

Date of Test: Sept. 10, 2018 – Sept. 27, 2018

Shenzhen Microtest Co., Ltd.  
<http://www.mtitest.com>



This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel: (86-755)88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: [mti@51mti.com](mailto:mti@51mti.com)

Address: No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China

## Table of Contents

<b>1. Summary of Test Result.....</b>	<b>4</b>
<b>2. General description.....</b>	<b>5</b>
2.1. Feature of equipment under test (EUT).....	5
2.2. EUT operation mode .....	5
2.3. EUT test setup.....	5
2.4. Test conditions.....	6
2.5. Ancillary equipment list.....	6
2.6. Measurement uncertainty .....	6
<b>3. Testing site.....</b>	<b>7</b>
<b>4. List of test equipment .....</b>	<b>8</b>
<b>5. Transmitter parameters.....</b>	<b>9</b>
5.1. Permitted range of operating frequencies.....	9
5.2. Operating frequency range(s) (OFR).....	11
5.3. H-field requirements .....	14
5.4. Transmitter spurious emissions .....	15
5.5. Transmitter out of band (OOB) emissions .....	19
5.6. WPT system unwanted conducted emissions .....	20
5.7. Receiver blocking .....	21
<b>Photographs of the Test Setup.....</b>	<b>22</b>
<b>Photographs of the EUT.....</b>	<b>24</b>

<b>General information</b>	
Applicant's name:	
Address:	
Manufacture's name:	
Address:	
<b>Product description</b>	
Product name:	Ontario wireless charger with speaker
Trademark:	N/A
Model name:	P308.873
Serial model:	P308.87
Deference in serial model:	All the model are the same circuit and RF module, except the model No..
Standards:	EN 303 417 V1.1.1 (2017-09)

*This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the Radio equipment directive requirements. And it is applicable only to the tested sample identified in the report.*

Tested by:

*Demi Mu*

Demi Mu

Sept. 27, 2018

Reviewed by:

*Blue Zheng*

Blue Zheng

Sept. 27, 2018

Approved by:

*Smith Chen*

Smith Chen

Sept. 27, 2018

## 1. Summary of Test Result

No.	Description of Test	Reference: Clause No	Result
1	Permitted range of operating frequencies	4.3.2	Pass
2	Operating frequency ranges	4.3.3	Pass
3	H-field requirements	4.3.4	Pass
4	Transmitter spurious emissions	4.3.5	Pass
5	Transmitter out of band (OOB) emissions	4.3.6	Pass
6	WPT system unwanted conducted emissions	4.3.7	N/A*
7	Receiver blocking	4.4.2	Pass
<p>** This applies to all WPT systems where the cable to the primary coil exceeds a length of 3 m and where the cable is not installed in the ground or any metallic structures.</p> <p>** The EUT only work in mode 1.</p>			

## 2. General description

### 2.1. Feature of equipment under test (EUT)

Product name:	Ontario wireless charger with speaker
Brand name:	N/A
Model name:	P308.873
Series model:	P308.87
Deference in serial model:	All the model are the same circuit and RF module, except the model No..
TX/RX frequency range:	110-205kHz
Radiated H-Field:	-12.364dBuA/m(@3m)
Operational mode:	Wireless charging
Antenna designation:	Coil Antenna
Power source:	DC 5V from adapter AC 230V/50Hz or DC 3.7V from battery
Battery:	DC 3.7V 1200mAh
Adapter information:	N/A
Note: The is a receiver device only use to energy transmission	


### 2.2. EUT operation mode

Testing shall be made under normal test conditions, and also, where stated, under extreme test conditions.

Test mode	Description
Mode 1	Wireless charging

### 2.3. EUT test setup

For Conducted test:

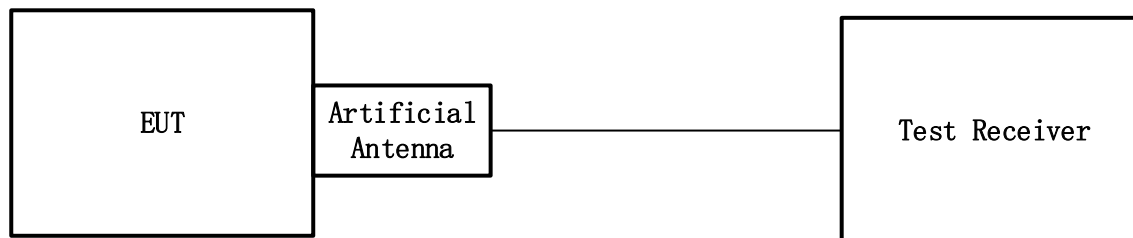

For Radiated test:



See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

## 2.4. Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C
- Humidity: 30%~70%
- Atmospheric pressure: 98kPa~101kPa

## 2.5. Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Adapter	QC5800-EU	/	Shenzhen Kosun Industrial Co.,Ltd
Mobile phone	S8	/	SAMSUNG

## 2.6. Measurement uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETSI TR 100 028 [i.14]. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Parameters	Uncertainty
RF frequency	$\pm 1.12 \times 10^{-8}$
RF power, conducted	$\pm 1$ dB
Radiated emission of transmitter	$\pm 4.7$ dB
Radiated emission of receiver	$\pm 4.7$ dB
Temperature	$\pm 0.5$ °C
Humidity	$\pm 0.5$ %

### 3. Testing site

Test laboratory:	Shenzhen Microtest Co., Ltd.
Laboratory location:	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
CNAS Registration No.:	L5868
Telephone:	(86-755)88850135
Fax:	(86-755)88850136

## 4. List of test equipment

Software Name: EMI Measurement Software						
Manufacturer: Farad						
Model: EZ-EMC						
Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E001	Spectrum Analyzer	Agilent	E4407B	MY41441082	2018/09/18	2019/09/17
MTI-E002	CMU 200 universal radio communication tester	Rohde&schwarz	CMU 200	114587	2018/09/18	2019/09/17
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI	1000314	2018/09/18	2019/09/17
MTI-E006	Broadband antenna	schwarabeck	VULB9163	872	2018/09/18	2019/09/17
MTI-E007	Horn antenna	schwarabeck	BBHA9120D	1201	2018/09/18	2019/09/17
MTI-E014	amplifier	America	8447D	3113A06150	2018/09/18	2019/09/17
MTI-E015	Conduction Immunity Signal Generator	Schloder	CDG6000	126A1343/2015	2018/09/18	2019/09/17
MTI-E016	Coupled decoupling network	Schloder	CDA M2/M3	A2210332/2015	2018/09/18	2019/09/17
MTI-E032	Comprehensive test instrument	Rohde&schwarz	CMW500	124192	2018/04/13	2019/04/12
MTI-E034	amplifier	Agilent	8449B	3008A02400	2018/08/22	2019/08/21
MTI-E040	Spectrum analyzer	Agilent	N9020A	MY49100060	2018/03/04	2019/03/03
MTI-E041	Signal generator	Agilent	N5182A	MY49060455	2018/02/22	2019/02/21
MTI-E042	Analog signal generator	Agilent	E4421B	GB40051240	2018/02/22	2019/02/21
MTI-E043	Power probe	Dare Instruments	RPR3006W	16I00054SN O16	2018/02/28	2019/02/27
MTI-E047	10dB attenuator	Mini-Circuits	UNAT-10+	15542	2018/05/23	2019/05/22
MTI-E049	spectrum analyzer	Rohde&schwarz	FSP-38	100019	2018/09/18	2019/09/17
MTI-E050	PSG Signal generator	Agilent	E8257D	MY46520873	2018/04/24	2019/04/23
MTI-E051	Active Loop Antenna 9kHz - 30MHz	Schwarzbeek	FMZB 1519 B	00044	2018/02/26	2019/02/25
MTI-E052	18-40GHz amplifier	Chengdu step Micro Technology	ZLNA-18-40G-21	1608001	2018/09/18	2019/09/17
MTI-E053	15-40G Antenna	Schwarzbeek	BBHA9170	BBHA9170582	2018/09/18	2019/09/17
Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).						

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## 5. Transmitter parameters

### 5.1. Permitted range of operating frequencies

#### 5.1.1. Definition

The permitted range of operating frequencies denotes the frequency ranges set out in Table 1. It likewise denotes the respective frequency range for accommodation of the fundamental WPT frequency of the EUT within its operating frequency range (OFR).

#### 5.1.2. Limits

The permitted range of operating frequency range(s) for intentional emissions shall be within 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz, see Table 2.

**Table 2**

Operational Mode	Set-up	Function of base station	Function of Mobile device	Test scenario	Conformance and Requirements
Mode 1: base station in stand-by, idle mode	Single device	Transmitter	Not applicable	Single radiation test (TX) with the base station/charging pad. The test set-up as described in clause 6.1.2 shall be used.	<ul style="list-style-type: none"> <li>• Operating frequency range (clause 4.3.3)</li> <li>• H-Field emission (clause 4.3.4)</li> <li>• TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7)</li> <li>• Performance criteria test (RX test) (clause 4.4)</li> </ul>
Mode 2: Communication before charging, adjustment charging mode / position	In combination	TX and RX	TX and RX	Specific test setup, declared by the manufacturer. Manufacturer shall declare the maximal distance between base station and mobile device the WPT system is able to communicate (distance D). The test setup- up shall be performed with the largest communication distance. The test set-up as described in clause 6.1.3 shall be used.	<ul style="list-style-type: none"> <li>• Operating frequency range (clause 4.3.3)</li> <li>• H-Field emission (clause 4.3.4)</li> <li>• TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7)</li> <li>• Wanted performance criteria test (RX test) (clause 4.4)</li> </ul>
Mode 3: Communication	WPT system alignment	TX and RX	TX and RX	Worst case alignment	
Mode 4: energy transmission	WPT system alignment	TX and RX	TX and RX	Both tests can be performed within one set-up, worst-case alignment. The test set-up as described in clause 6.1.4 shall be used.	<ul style="list-style-type: none"> <li>• Operating frequency range (clause 4.3.3)</li> <li>• H-Field emission (clause 4.3.4)</li> <li>• TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7)</li> <li>• Wanted Performance criteria test (RX test) (clause 4.4)</li> </ul>

#### 5.1.3. Test Procedures

Follow the test procedure as described in EN 303 417 V1.1.1 Clause 4.3.3.2 to measure the permitted range of operating frequencies at normal condition.

#### 5.1.4. Test Result

Permitted range of operating frequencies				
$F_L$ (KHz) (kHz)	$F_H$ (kHz)	Limit (KHz)		Result
110	205	$F_L \geq 100$	$F_H \leq 300$	Pass

## 5.2. Operating frequency range(s) (OFR)

### 5.2.1. Definition


The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).

The operating frequency range(s) of the WPT system are determined by the lowest ( $f_L$ ) and highest frequency ( $f_H$ ) as occupied by the power envelope.


The WPT system could have more than one operating frequency range.

For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.

For multi-frequency systems the OFR is described in Figures 2 and 3.

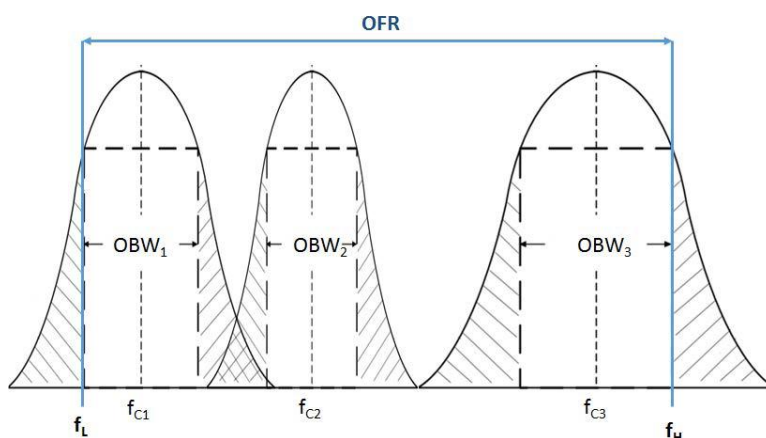

**Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time**

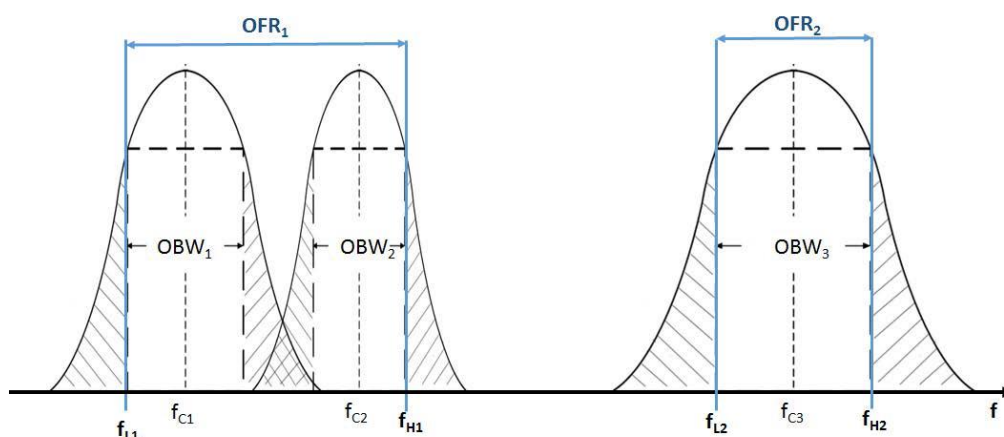

**Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time**

### Limits

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.

## 5.2.2. Test Procedures


The conformance test suite for operating frequency ranges shall be as defined in clause 6.2.1. The manufacturer shall declare all necessary information (distance, orientation) which are necessary to set-up the different alignments as defined in clause 6.1.1 for each operational mode as defined in clause 4.2.3, Table 2.

Conformance shall be established under test conditions to be declared by the manufacturer according to clause 4.1. The interpretation of the results for the measurements uncertainty shall be as given in clause 5.11.


## 5.2.3. Test Result

Operating frequency range(s) (OFR)				
$F_L$ (KHz) (kHz)	$F_H$ (kHz)	Limit (KHz)		Result
105.9255	209.0925	$F_L \geq 100$	$F_H \leq 300$	Pass
Note: $F_L$ (KHz) = $F_{\text{centre}} - \text{OBW}1/2$ $F_H$ (KHz) = $F_{\text{centre}} + \text{OBW}1/2$				

## 99% OBW

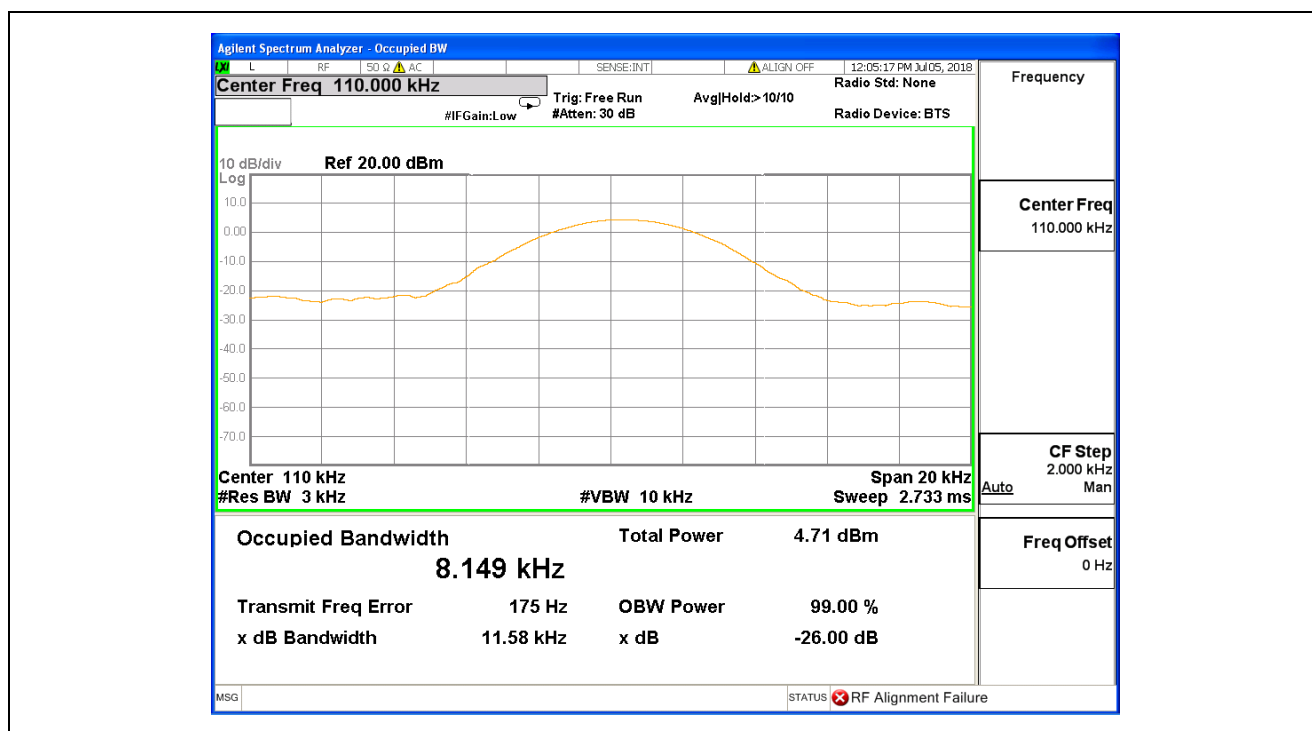

99% OBW

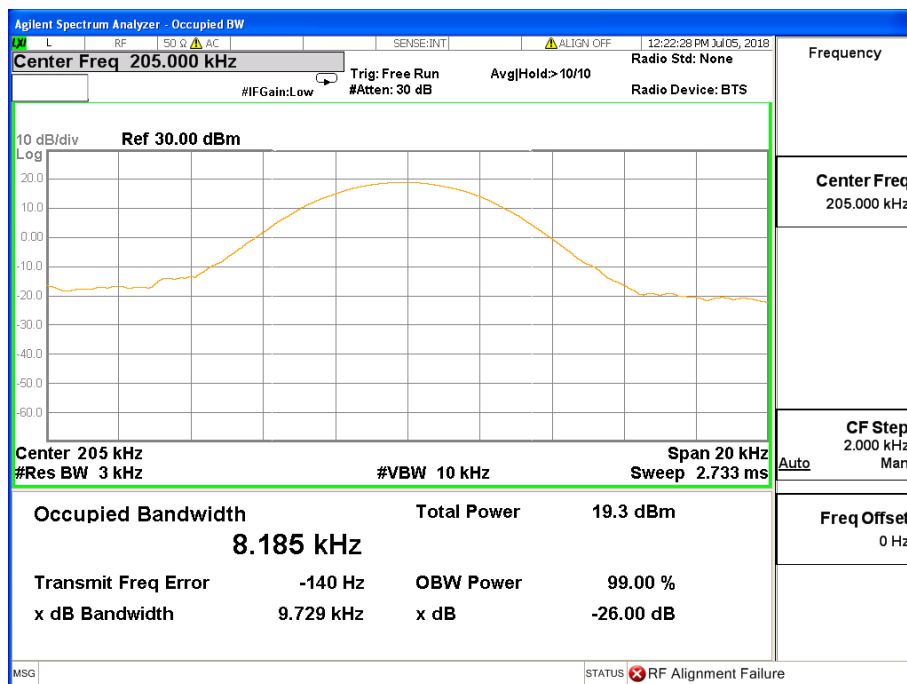

### 5.3. H-field requirements

#### 5.3.1. Definition

The radiated H-field is defined in the direction of maximum field strength under specified conditions of measurement.

#### 5.3.2. Limits

The H-field limits are provided in Table 3.

**Table 3: H-field limits**

Frequency range [MHz]	H-field strength limit [dBμA/m at 10 m]	Comments
$0.019 \leq f < 0.021$	72	
$0.059 \leq f < 0.061$	69.1 descending 10 dB/dec	Note 1
$0.079 \leq f < 0.090$	67.8 descending 10 dB/dec	Note 2
$0.100 \leq f < 0.119$	42	
$0.119 \leq f < 0.135$	66 descending 10 dB/dec	Note 1
$0.135 \leq f < 0.140$	42	
$0.140 \leq f < 0.1485$	37.7	
$0.1485 \leq f < 0.30$	-5	
$6.765 \leq f < 6.795$	42	

Note 1: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.  
 Note 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

#### 5.3.3. Test Procedures

Follow the test procedure as described in EN 303 417 V1.1.1 Clause 6.2.1 to measure the H-field requirements at normal condition.

#### 5.3.4. Test Result

Pre-scan EUT X, YX Z axis, and find the worst case at X axis.

Frequency (MHz)	Level (dBuA/m)@3m	C <sub>3</sub> Factor (dB)	Level (dBuA/m)@10m	Limit (dBuA/m)@10m	Result
0.110	-12.364	31.524	-43.868	42	Pass

Frequency (MHz)	Level (dBuA/m)@3m	C <sub>3</sub> Factor (dB)	Level (dBuA/m)@10m	Limit (dBuA/m)@10m	Result
0.205	-10.627	33.271	-43.898	-5	Pass


Note:1.  $H_{3m}=H_{10m}+C_3$  refer to ETSI EN300 330 Annex H.2

$$\text{Level(dBuA/m)@10m} = \text{Level(dBuA/m)@3m} - C_3$$

## 5.4. Transmitter spurious emissions


### 5.4.1. Definition

The transmitter spurious emissions for a single frequency system are to be considered in frequency ranges defined in Figure 4 ( $f < f_{SL}$  and  $f > f_{SH}$ ).

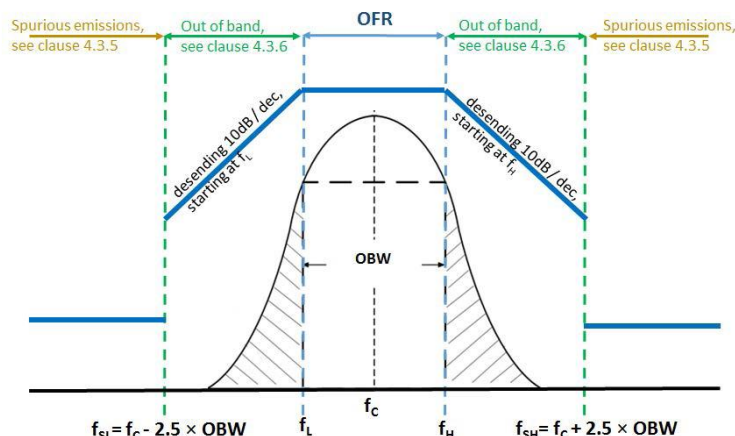

**Figure 4: Out of band and spurious domain of a single frequency WPT system**

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ( $f < f_{SL}$  and  $f > f_{SH}$ ).

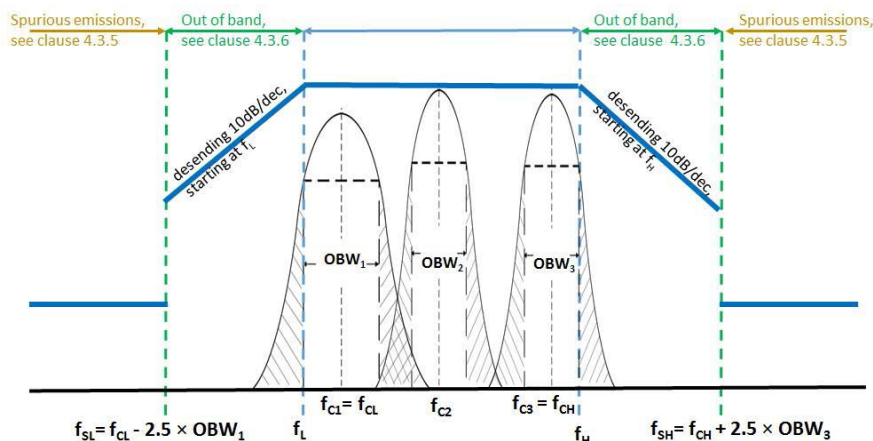

**Figure 5: Out of band and spurious domain of a multi - frequency system  
(during one WPT system cycle time) 4.3.5.3**

### 5.4.2. Limits

The radiated field strength of spurious emissions below 30 MHz shall not exceed the generated H-field given in Table 4.

State (see note)	Frequency $9 \text{ kHz} \leq f < 10 \text{ MHz}$	Frequency $10 \text{ MHz} \leq f < 30 \text{ MHz}$
Operating	27 dB $\mu$ A/m at 9 kHz descending	-3.5 dB $\mu$ A/m
Standby	5.5 dB $\mu$ A/m at 9 kHz descending	-25 dB $\mu$ A/m
Note: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

The power of any radiated spurious emission between 30 MHz and 1 GHz shall not exceed the values given in Table 5.

**Table 5**

State (see note)	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
Note: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

#### 5.4.3. Test Procedures

Follow the test procedure as described in EN 300 330 V2.1.1 Clause 6.2.1. to measure the transmitter spurious emissions at normal condition.

#### 5.4.4. Test Result

Pre-scan EUT X, YX Z axis, and find the worst case at X axis.

9KHz-30MHz :

No.	Frequency (MHz)	Result@3m dBuA/m	C <sub>3</sub> (dB)	Result @10m dBuA/m	Limit@10m dBuA/m	Margin (dB)	Rem ark
1	16.7163	-21.23	22.45	-43.68	-3.6	-40.08	Peak

Note:  $H_{3m}=H_{10m}+C_3$  refer to ETSI EN300 330 Annex H.2


Result @10m= Result@3m - C<sub>3</sub>

Margin= Result @10m - Limit@10m




30MHz-1000MHz :

EUT	Ontario wireless charger with speaker	Model name:	P308.873
Temperature:	25°C	Relative Humidity:	52%
Pressure:	101kPa	Phase:	H
Test voltage:	DC 9V form AC 230V/50Hz	Test mode:	Mode 1

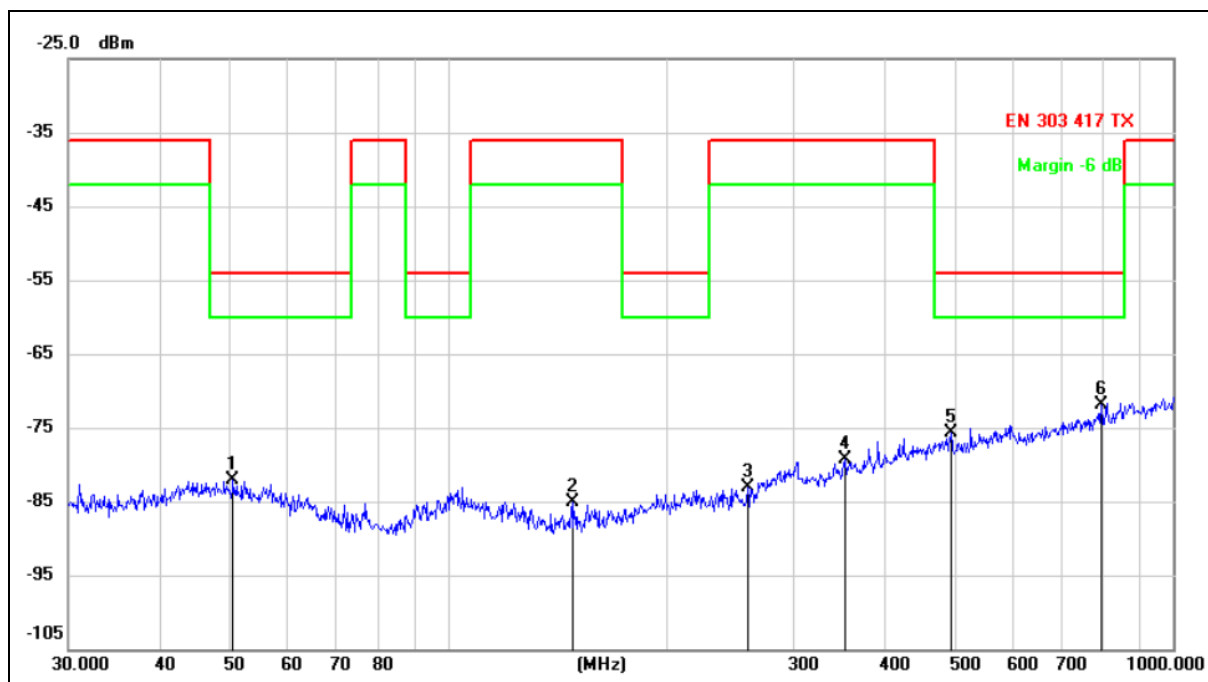

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dBm	Measure- ment dBm	Limit dBm	Over dB	Detector
1		50.5859	-81.67	-0.41	-82.08	-54.00	-28.08	peak
2		148.4410	-79.33	-5.86	-85.19	-36.00	-49.19	peak
3		259.2336	-82.62	-0.49	-83.11	-36.00	-47.11	peak
4		352.9433	-81.26	1.87	-79.39	-36.00	-43.39	peak
5		494.1983	-80.13	4.43	-75.70	-54.00	-21.70	peak
6	*	796.1829	-79.50	7.52	-71.98	-54.00	-17.98	peak

EUT	Ontario wireless charger with speaker	Model name:	P308.873
Temperature:	25°C	Relative Humidity:	52%
Pressure:	101kPa	Phase:	V
Test voltage:	DC 9V form AC 230V/50Hz	Test mode:	Mode 1

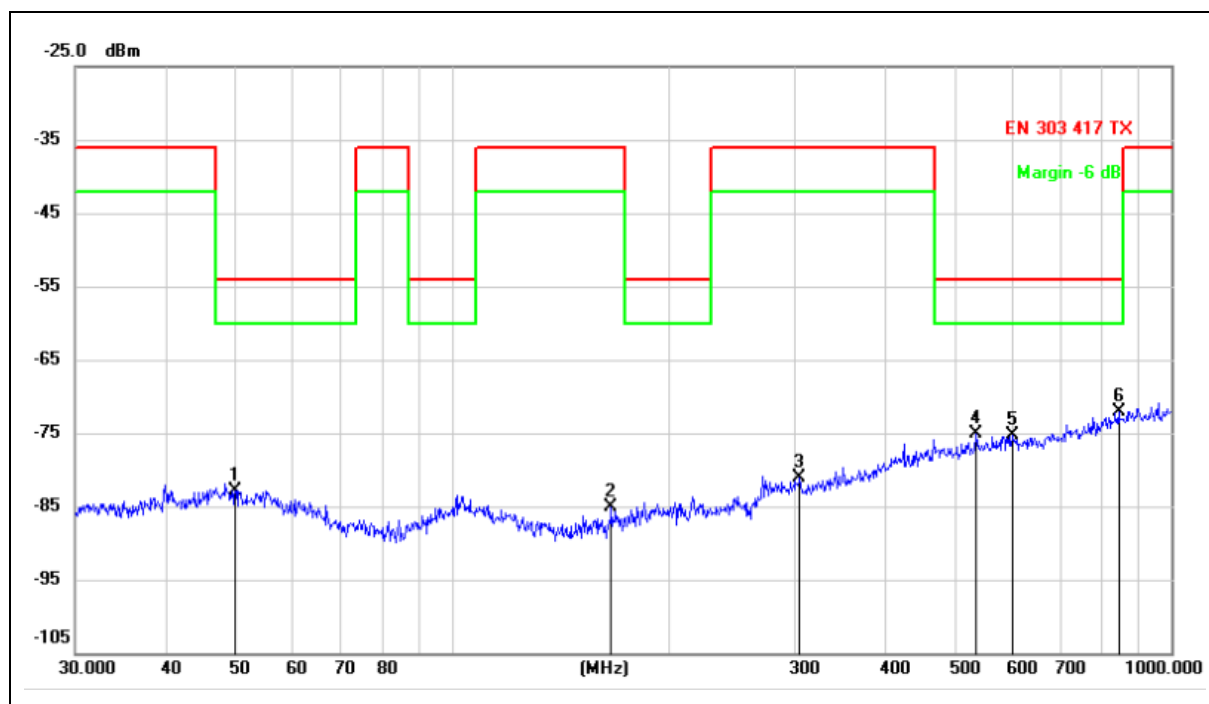

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dBm	Measure- ment dBm	Limit dBm	Over dB	Detector
1		50.0566	-82.72	-0.13	-82.85	-54.00	-28.85	peak
2		166.6511	-81.44	-3.62	-85.06	-36.00	-49.06	peak
3		304.6099	-82.56	1.45	-81.11	-36.00	-45.11	peak
4		535.7073	-80.25	5.15	-75.10	-54.00	-21.10	peak
5		601.4265	-81.51	6.17	-75.34	-54.00	-21.34	peak
6	*	845.0878	-80.67	8.62	-72.05	-54.00	-18.05	peak

## 5.5. Transmitter out of band (OOB) emissions

### 5.5.1. Definition

The WPT system out of band emissions are to be considered in frequency ranges defined in Figure 4 and Figure 5 (between  $f_{SL}$  and  $f_L$  and between  $f_H$  and  $f_{SH}$ ).

### 5.5.2. Limits

The OOB limits are visualized in Figures 4 and 5; they are descending from the intentional limits from Table 3 at  $f_H/f_L$  with 10 dB/decade.

### 5.5.3. Test Procedures

Follow the test procedure as described in EN 303 417 V1.1.1 Clause 6.2.1 to measure the transmitter out of band (OOB) emissions at normal condition.

### 5.5.4. Test Result

No.	Frequency	Result@3 m	$C_3$	Result @10m	Limit@10m	Margin	Remark
	(MHz)	dBuA/m	(dB)	dBuA/m	dBuA/m	(dB)	
1	$F_{cL-2.5 \times OBW_1}$	-13.87	31.2	-45.07	16.77	61.84	Peak
2	$F_L$	-11.58	31.2	-42.78	16.64	59.42	Peak
3	$F_H$	-10.31	31.2	-41.51	16.24	57.75	Peak
4	$F_{cH-2.5 \times OBW_2}$	-14.14	31.2	-45.34	16.08	61.42	Peak

Note:  $H_{3m}=H_{10m}+C_3$  refer to ETSI EN300 330 Annex H.2

## 5.6. WPT system unwanted conducted emissions

### 5.6.1. Definition

WPT system unwanted conducted emissions are based on the emissions of the unwanted common mode current on the cable between the off board power supply and the primary coil seen as a monopole radiator driven against the power supply.

### 5.6.2. Limits

The common mode current (ICM) between 1 MHz and 30 MHz shall not exceed the following limit:

$$ICM = 47 - 8 \times \log(f) \text{ dB}\mu\text{A}$$

Note: f is the frequency in MHz.

### 5.6.3. Test Procedures

Follow the test procedure as described in EN 303 417 V1.1.1 Clause 6.2.4 to measure the WPT system unwanted conducted emissions.

### 5.6.4. Test Result

Not application.

## 5.7. Receiver blocking

### 5.7.1. Definition

Blocking is a measure of the capability of the receiver to receive a wanted signal without exceeding a given degradation due to the presence of an unwanted input signal at any frequencies other than those of the receiver spurious responses.

The test shall be performed in the relevant operational modes (see clause 4.2.3).

The wanted performance criteria from clause 4.2.2 shall be used as criterion for the receiver blocking tests.

### 5.7.2. Limits

The receiver blocking limits in Table 6 shall be fulfilled

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency ( $f_c$ ) of the WPT	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
Signal level field strength at the EUT	72 dB $\mu$ A/m	72 dB $\mu$ A/m	82 dB $\mu$ A/m
Note: $F = \text{OFR}$ see clause 4.3.3.			

### 5.7.3. Test Procedures


Follow the test procedure as described in EN 303 417 V1.1.1 Clause 6.3.2 to measure Receiver blocking.

### 5.7.4. Test Result


Test Frequency	Blocking Signal (dB $\mu$ A/m)	Performance Criterion	Result
$F_c - 10 \times \text{OFR}$	73	Without degradation of Performance	Pass
$F_c - \text{OFR}$	67	Without degradation of Performance	Pass
$F_c$	63	Without degradation of Performance	Pass
$F_c + \text{OFR}$	66	Without degradation of Performance	Pass
$F_c + 10 \times \text{OFR}$	74	Without degradation of Performance	Pass

## Photographs of the Test Setup


Radiated emission below 30MHz

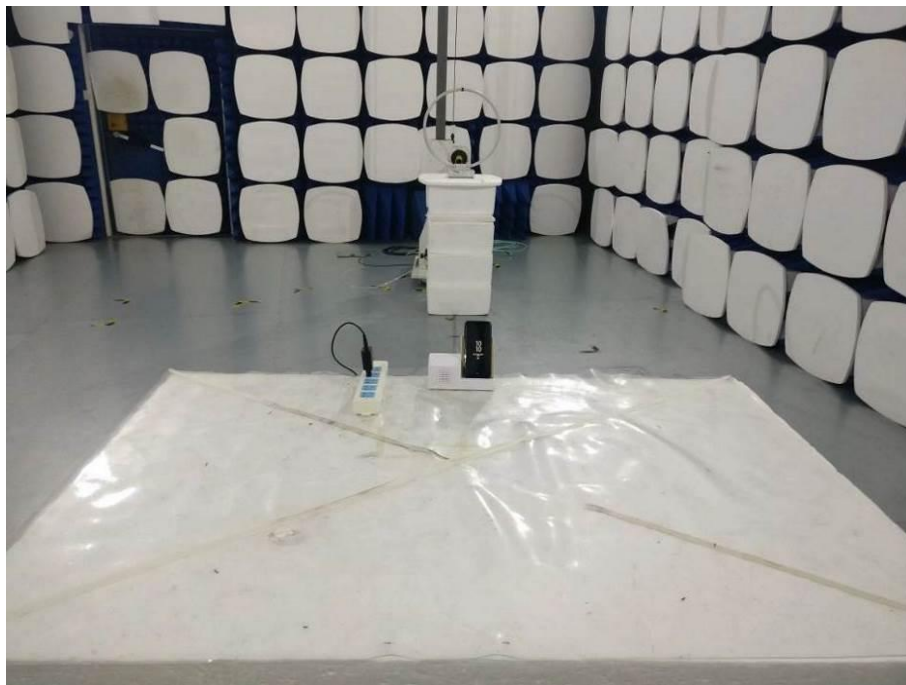

Radiated emission above 30MHz

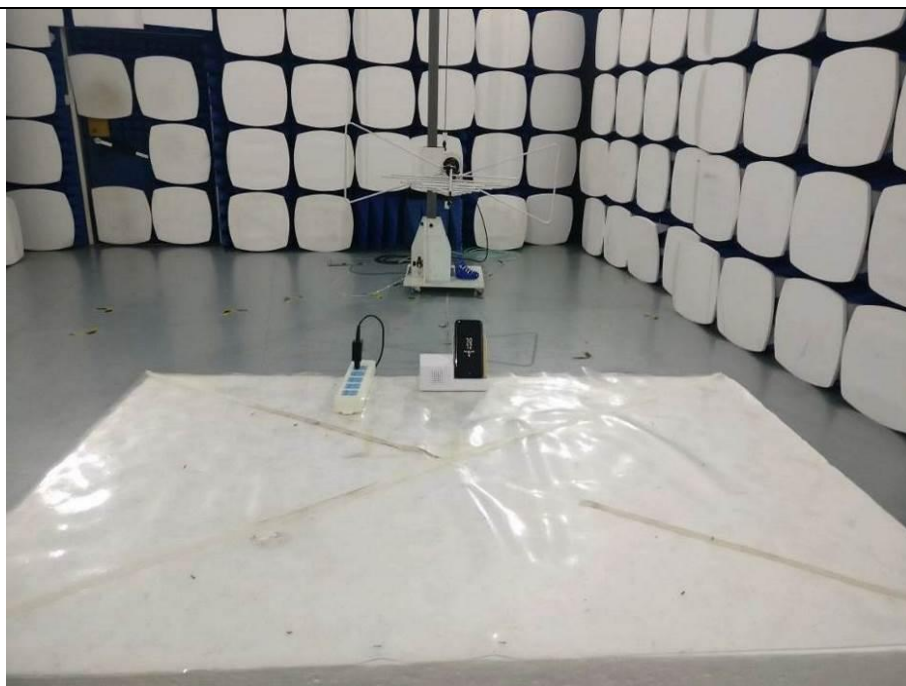

Receiver blocking

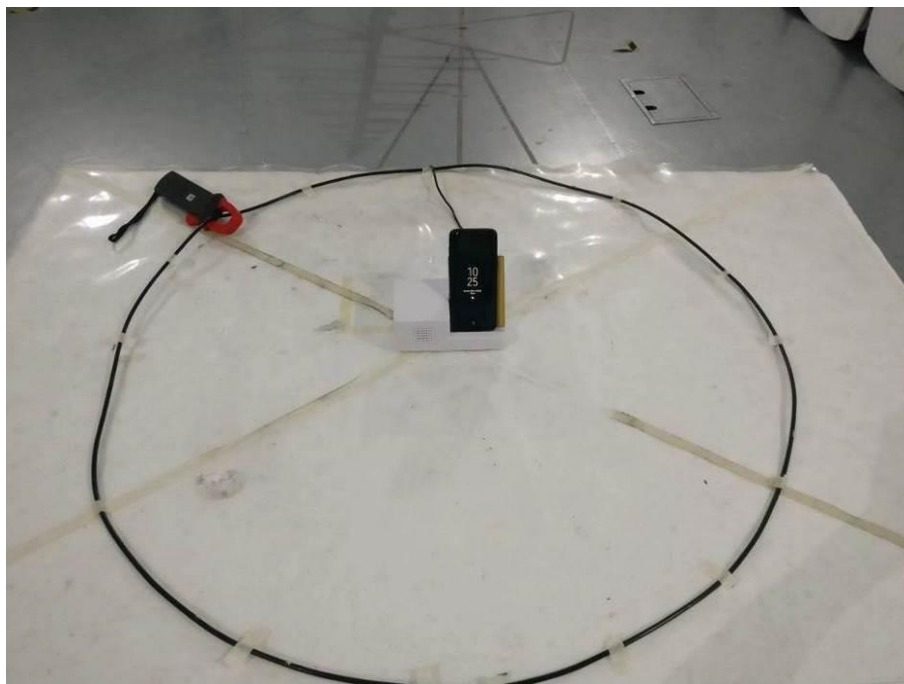

## Photographs of the EUT

See the APPENDIX 1: EUT PHOTO in the report No.: MTi180919E093-1.

**----END OF REPORT----**