



EUROFINS PRODUCT TESTING SERVICE (SHANGHAI) CO., LTD.

TEST- REPORT

TEST REPORT NUMBER: EFSH15021195-IE-01-E01
FCC 47 CFR PART 15, SUBPART B



Eurofins Product Testing Service (Shanghai) Co., Ltd.
No.395 West Jiangchang Road, Zhabei District, Shanghai,
200436, P.R. China

Phone: +86-21-61819181
Fax: +86-21-61819180
Page 1 of 19

TABLE OF CONTENTS

1 Contents

1	Contents	2
2	General Information	3
2.1	Notes	3
2.2	Testing laboratory	4
2.3	Details of approval holder	5
2.4	Application details	5
2.5	EUT information	5
2.6	Test standards	5
3	Technical test	6
3.1	Summary of test results	6
3.2	Test environment	6
3.3	Test equipment utilized	6
3.4	Test results	7
4	Emission Test	8
4.1	Conducted Emission	8
4.2	Radiated emission	11
5	Test setup Photos	14
6	EUT Photos	15

2 General Information

2.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

Eurofins Product Testing Service (Shanghai) is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.


The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Product Testing Service (Shanghai).

This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Product Testing Service (Shanghai), available on request or accessible at www.pt.eurofins.com

Operator:

2015-03-11

Stefan Zhao



Date

Eurofins-Lab.


Name

Signature

Technical responsibility for area of testing:

2015-03-11

Ken Xu



Date

Eurofins

Name

Signature

Test Report No.: EFSH15021195-IE-01-E01

Eurofins Product Testing Service (Shanghai) Co., Ltd.
No.395 West Jiangchang Road, Zhabei District, Shanghai, 200436, P.R. China

2.2 Testing laboratory

Eurofins Product Testing Service (Shanghai) Co., Ltd.

No.395 West Jiangchang Road, Zhabei District, Shanghai, 200436, P.R. China

Telephone : +86-21-61819181

Telefax : +86-21-61819180

Test location

Subcontractor(Radiated emission)

Name : BUREAU VERITAS ADT (SHANGHAI) CORPORATION.

Address : 2F, Building C, No. 1618 Yishan Road SHANGHAI

Telephone : + 86-21-6465 9091

Fax : + 86-21-6465 9092

All test was performed by Stefan Zhao at BUREAU VERITAS ADT (SHANGHAI) CORPORATION.

2.3 Details of approval holder

Name : Xindao B.V.
Address : P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Telephone : ./.
Fax : ./.

2.4 Application details

Date of receipt of application : 2015-03-02
Date of receipt of test item : 2015-03-02
Date of test : 2015-03-02 to 2015-03-11

2.5 EUT information

Description of test item : port solar charger
Type identification : P323.14
Brand Name : ./.
Serial number : ./.
Power supply : DC 5V
Additional information : The appliance is Nino touch USB powered by USB socket. Adapter BX-0501000 was used for test accessory.

2.6 Test standards

Technical standard :

FCC 47 CFR Part 15, Subpart B: 2013

3 Technical test

3.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified were ascertained in the course of the tests performed.



3.2 Test environment

Temperature : 20 ... 25°C
 Relative humidity content : 30 ... 60%
 Air pressure : 100 ... 103kPa

3.3 Test equipment utilized

Measurement Equipment List				
No.	Name	Model	Manufacturer	Cal. due date
1	EMI test receiver	ESCI 30	R&S	2015-11-27
2	Artificial mains	ENV216	R&S	2015-11-27
3	EMI Test Spectrum	E4403B	Agilent	2015-08-25
4	EMI test receiver	ESCS30	R&S	2015-04-14
5	Broadband Antenna	VULB9168	Schwarzbeck	2015-03-27
6	Amplifier	8447D	Agilent	2015-11-06

3.4 Test results

☒ 1st test☐ test after modification☐ production test

Test case	Subclause	Required	Test passed	Test failed
Conducted Emission	Table 2 of FCC part 15.107 ANSI C63.4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission	Table 5 of FCC part 15.109 ANSI C63.4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

4 Emission Test

4.1 Conducted Emission


This clause lays down the general requirements for the measurement of disturbance voltage produced at the terminals of apparatus.

4.1.1 Limits

Frequency range MHz	At mains terminals dB (μV)	
	Quasi-peak Limit	Average Limit
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit applies at the boundary between the frequency ranges.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

4.1.2 Measurement procedure

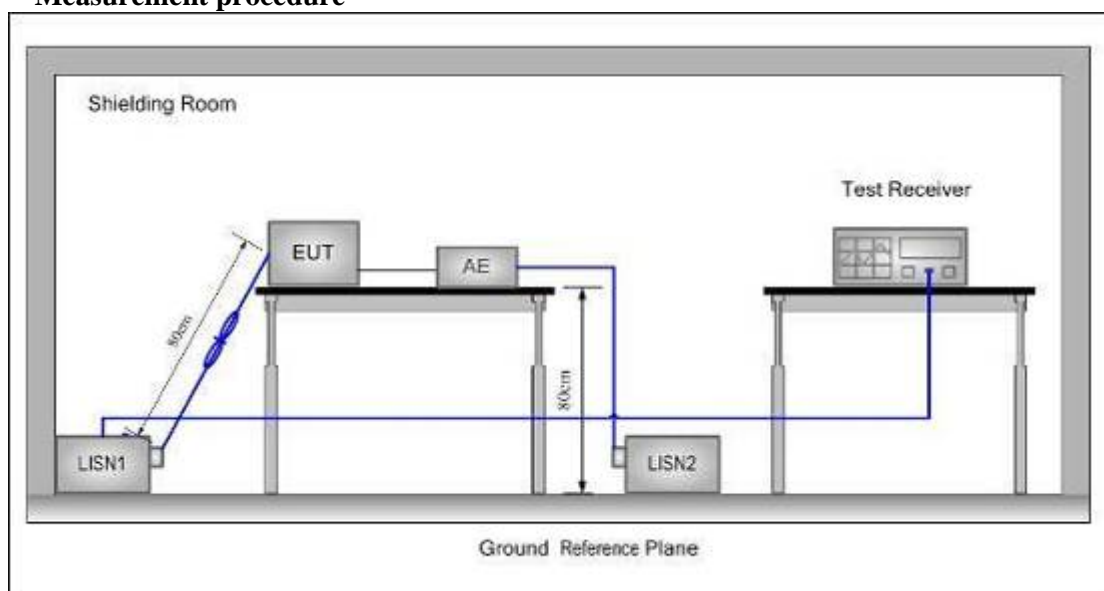

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN (Line Impedance Stabilization Network) which provides a $(50 \mu H + 5 \Omega) \parallel 50 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. A pre-scan was performed with the peak(PK) detector to find out the maximum emission data plots of the EUT.

4.1.3 Measurement uncertainty


$U_{lab}(cond) = 1.8dB$ at 95% level of confidence, $k=2$

Test Report No.: EFSH15021195-IE-01-E01

Eurofins Product Testing Service (Shanghai) Co., Ltd.
No.395 West Jiangchang Road, Zhabei District, Shanghai, 200436, P.R. China


4.1.4 Results -Measurement Data

Live Line:
Level

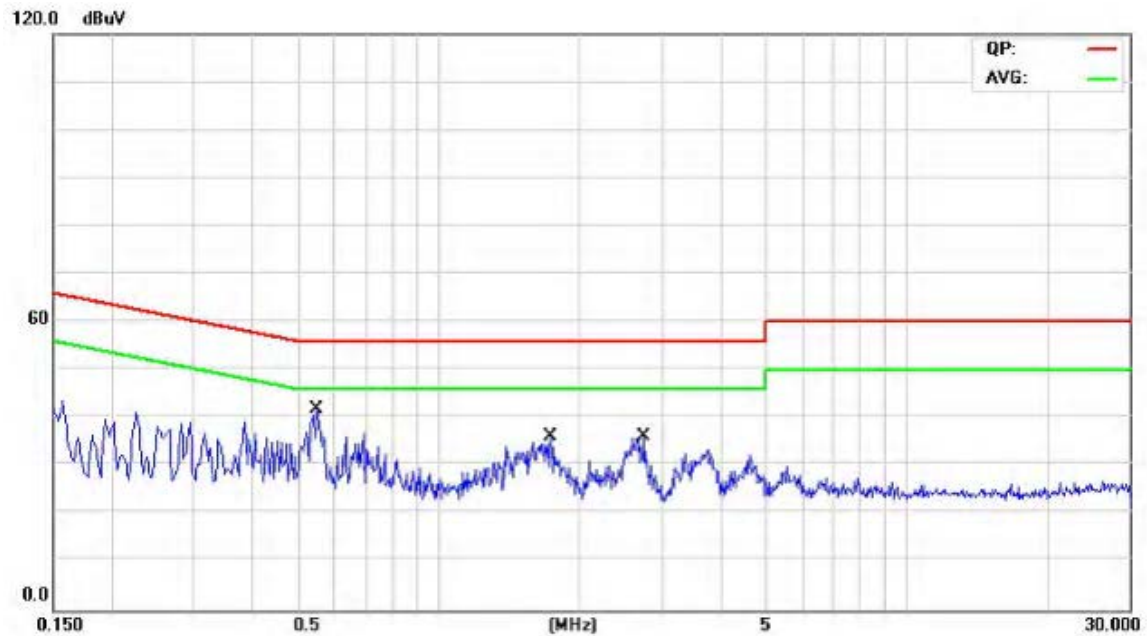

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.5500	29.01	9.72	38.73	56.00	-17.27	QP
2		0.5500	17.99	9.72	27.71	46.00	-18.29	AVG
3		1.7380	17.34	9.81	27.15	56.00	-28.85	QP
4		1.7380	9.02	9.81	18.83	46.00	-27.17	AVG
5		2.7540	16.63	9.90	26.53	56.00	-29.47	QP
6		2.7540	8.42	9.90	18.32	46.00	-27.68	AVG

Neutral Line: Level

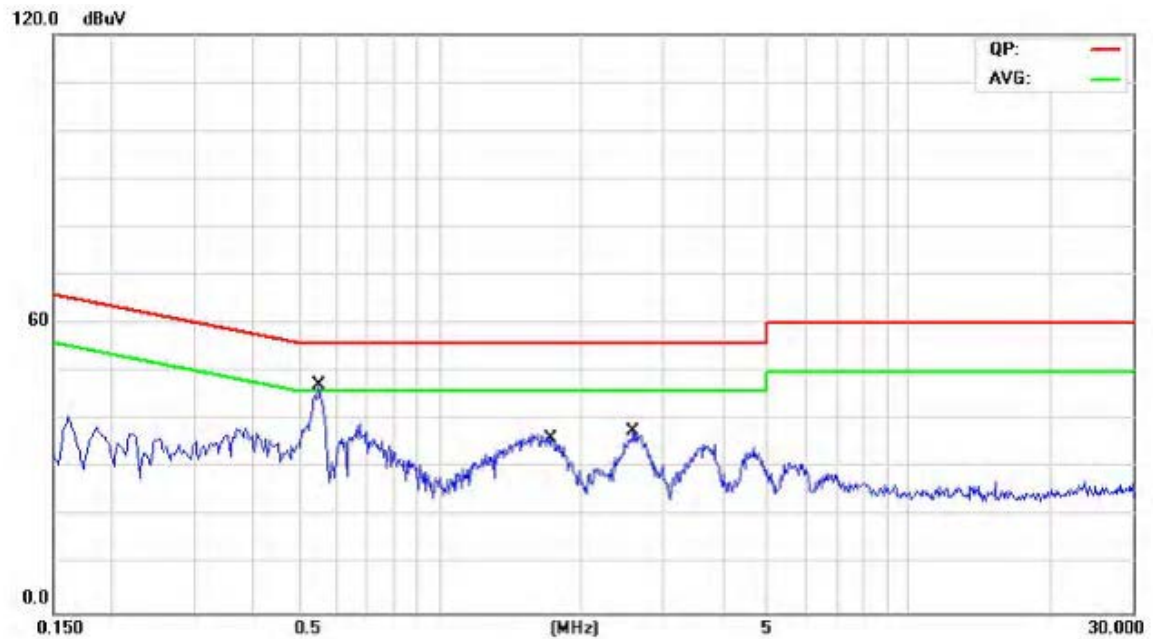

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.5540	34.34	9.72	44.06	56.00	-11.94	QP
2		0.5540	19.36	9.72	29.08	46.00	-16.92	AVG
3		1.7340	21.72	9.81	31.53	56.00	-24.47	QP
4		1.7340	11.89	9.81	21.70	46.00	-24.30	AVG
5		2.5940	22.56	9.89	32.45	56.00	-23.55	QP
6		2.5940	12.77	9.89	22.66	46.00	-23.34	AVG


4.2 Radiated emission

This clause lays down the general requirements for the measurement of Radiated disturbance produced at the space of apparatus.

4.2.1 Limits

Frequency range	Limits at 3m
MHz	dB (μ V/m)
30 to 88	40.0
88 to 216	43.5
216 to 960	46.0
Above 960	54.0
The tighter limit applies at the band edges.	

4.2.2 Measurement procedure

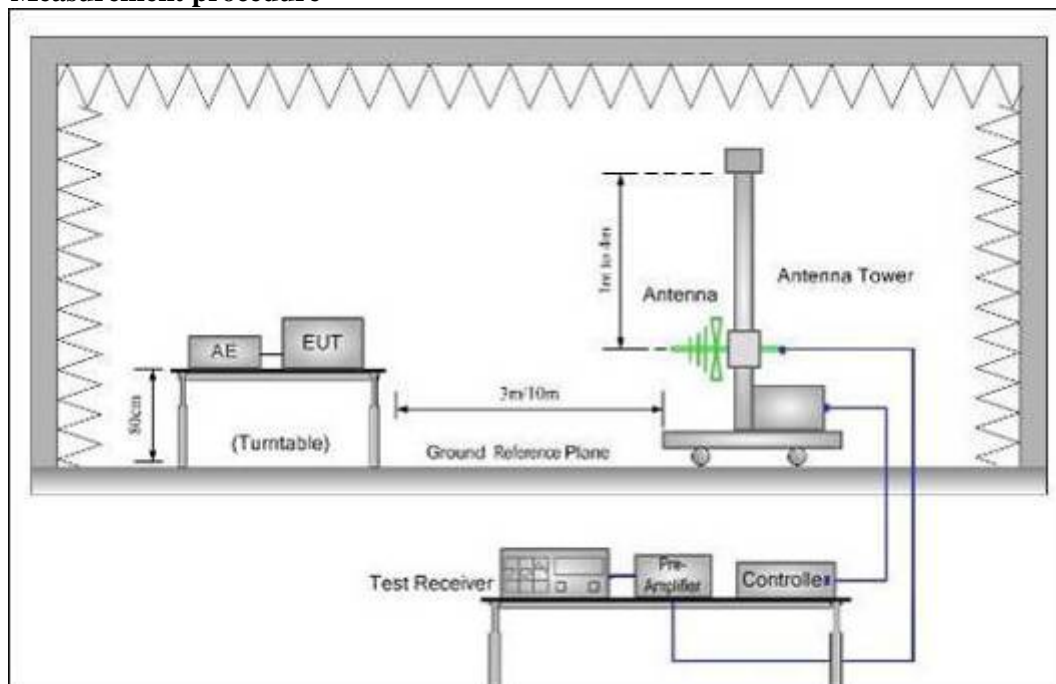

1. The radiated emissions test was conducted in a semi-anechoic chamber. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
2. Before get the final emission results with quasi-peak(QP) detector, a pre-scan was performed with the peak(PK) detector to find out the maximum emission data plots of the EUT.
3. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. Test was performed at 3 m distance.

4.2.3 Measurement uncertainty

Test Report No.: EFSH15021195-IE-01-E01


Eurofins Product Testing Service (Shanghai) Co., Ltd.
No.395 West Jiangchang Road, Zhabei District, Shanghai, 200436, P.R. China

Ulab(cond) = 3.22dB at 95% level of confidence , k=2

4.2.4 Results

Note: Both discharging mode and charging mode were tested and the worst mode(discharging mode) was recorded in the report.

Horizontal:
Level

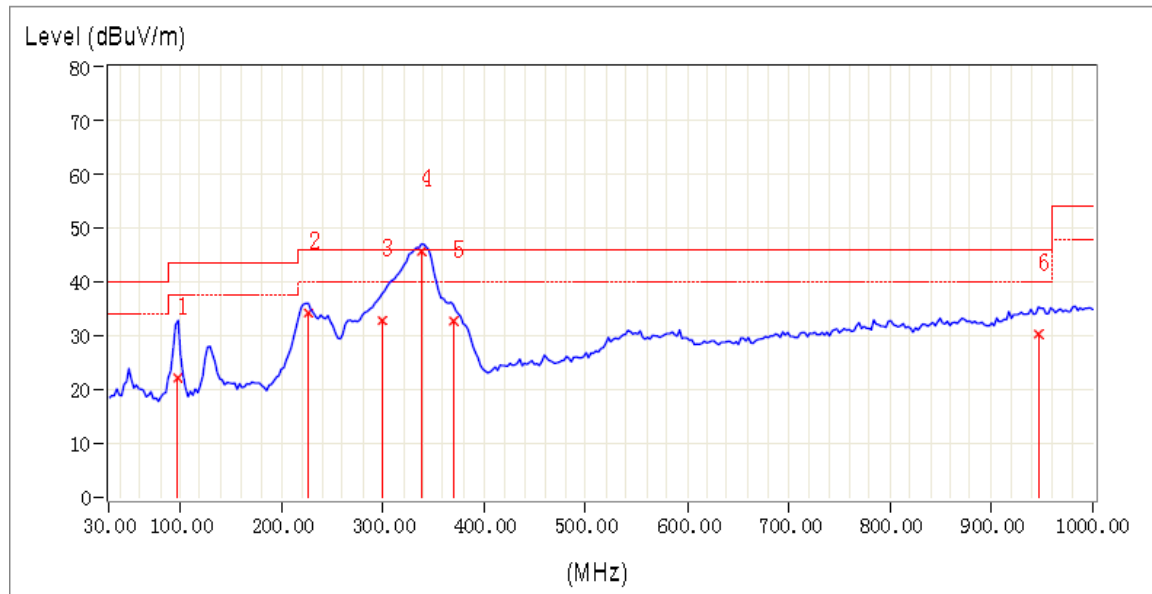


No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Over Limit dB	Tower / Table	
							cm	deg
1	97.41	10.26	11.88	22.14	43.50	-21.36	100	188
2	226.48	11.46	22.74	34.20	46.00	-11.80	100	289
3	299.18	14.18	18.63	32.81	46.00	-13.19	100	194
*	4	338.06	15.30	30.37	46.00	-0.33	100	62
5	369.50	16.32	16.39	32.71	46.00	-13.29	100	173
6	946.65	28.29	2.01	30.30	46.00	-15.70	100	48

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Factor.

Vertical

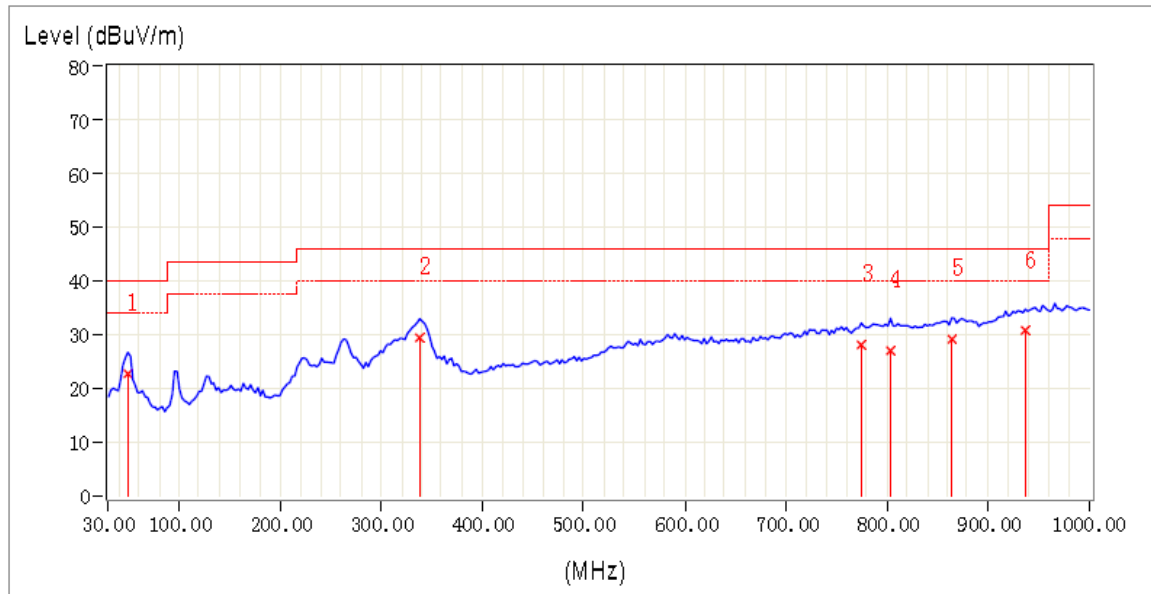

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Over Limit dB	Tower / Table	
							cm	deg
1	49.40	13.64	9.04	22.68	40.00	-17.32	100	145
2	337.69	15.29	14.07	29.36	46.00	-16.64	100	170
3	774.48	25.76	2.38	28.14	46.00	-17.86	100	49
4	803.58	26.09	0.92	27.01	46.00	-18.99	100	145
5	864.20	26.43	2.72	29.15	46.00	-16.85	100	214
*	936.95	27.98	2.78	30.76	46.00	-15.24	100	178

Note:


1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Factor.

5 Test setup Photos

Conducted disturbance




Radiated disturbance

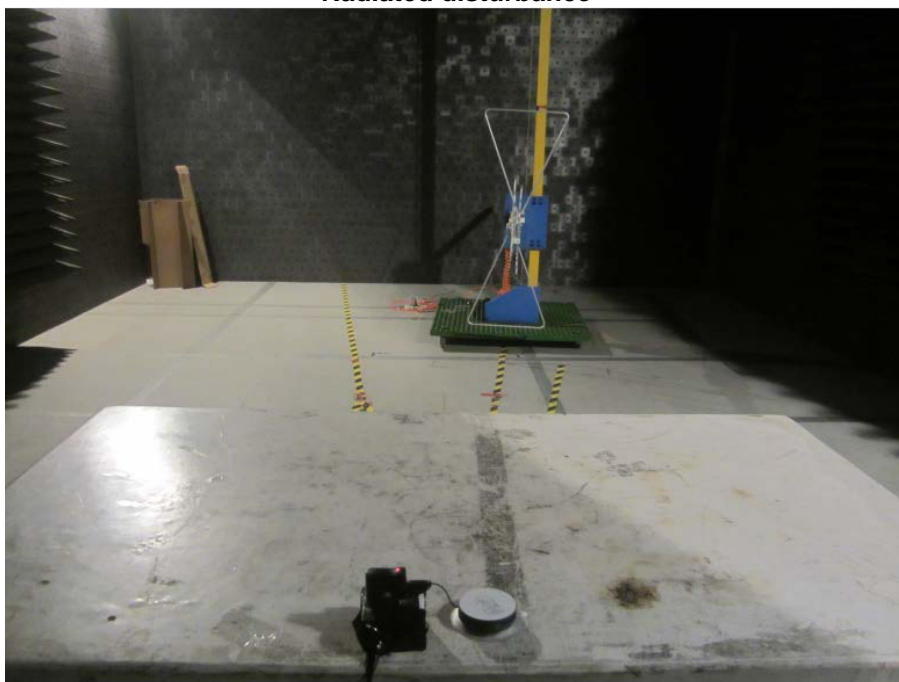

6 EUT Photos

Overall view

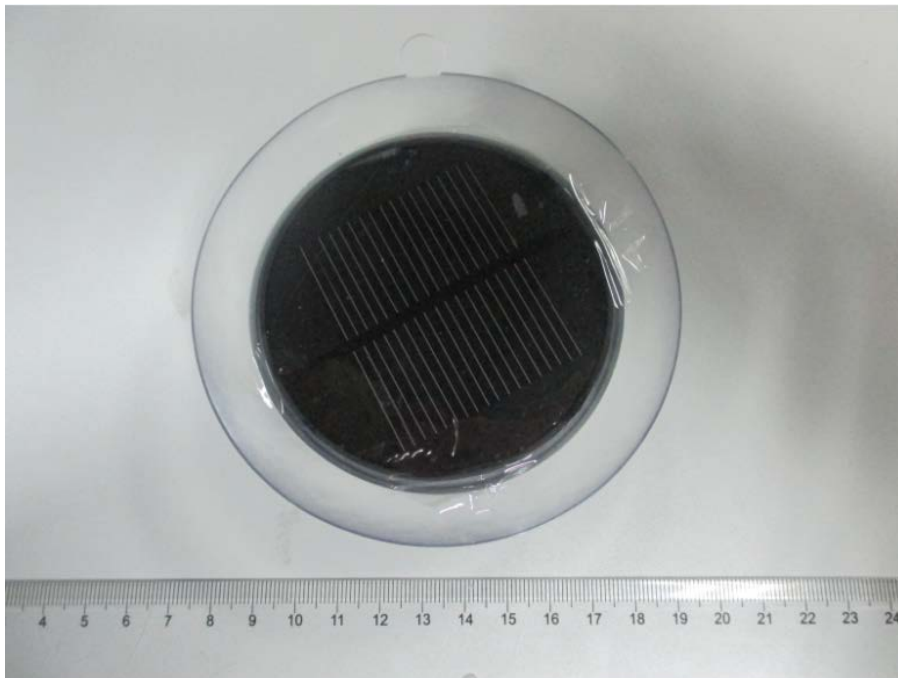

Overall view



Overall view



Port view




Cable view




Internal view




Internal view

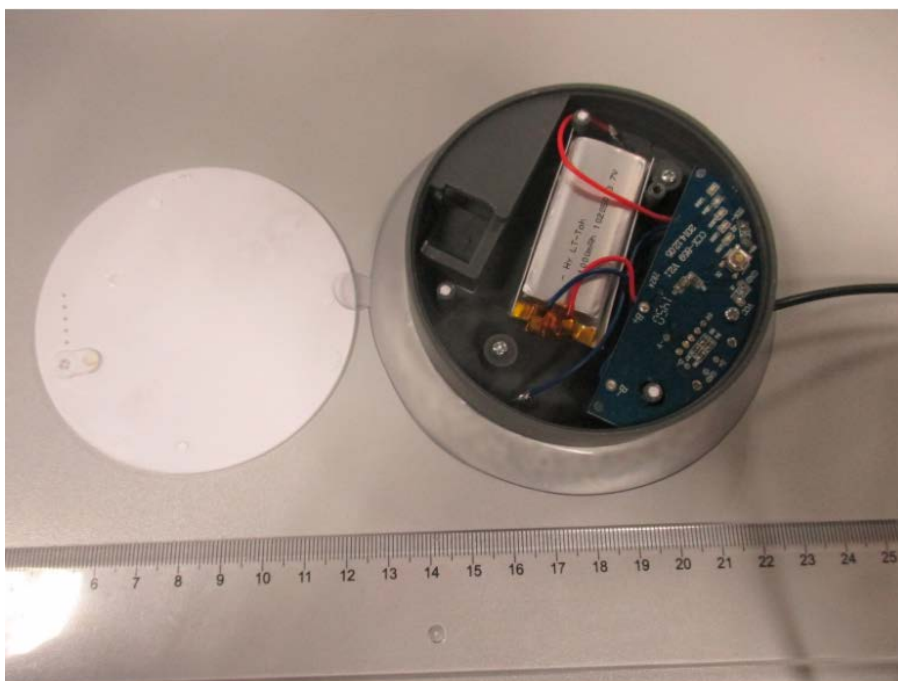

PCB view

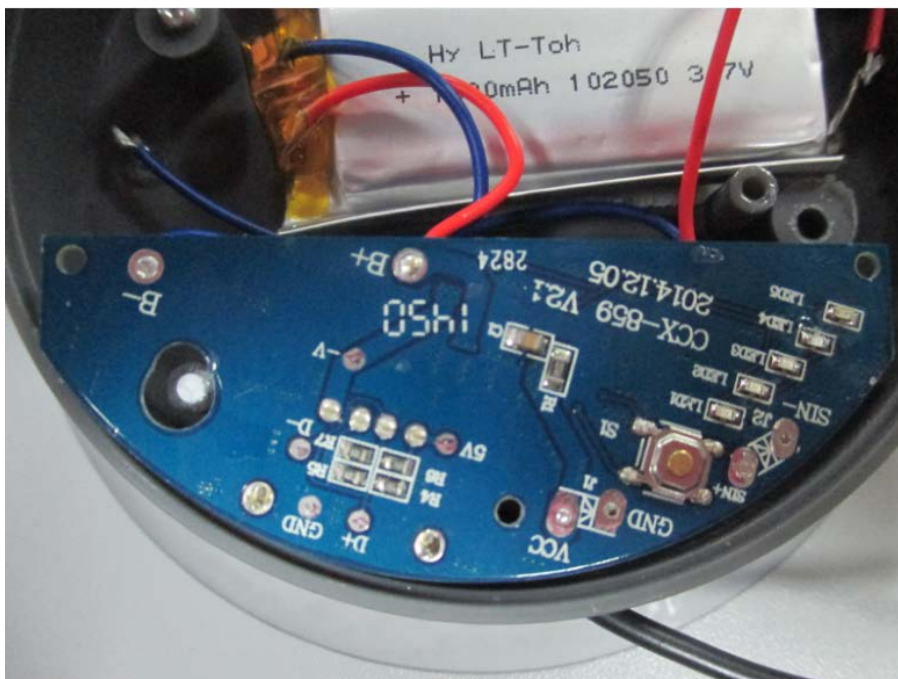

PCB view

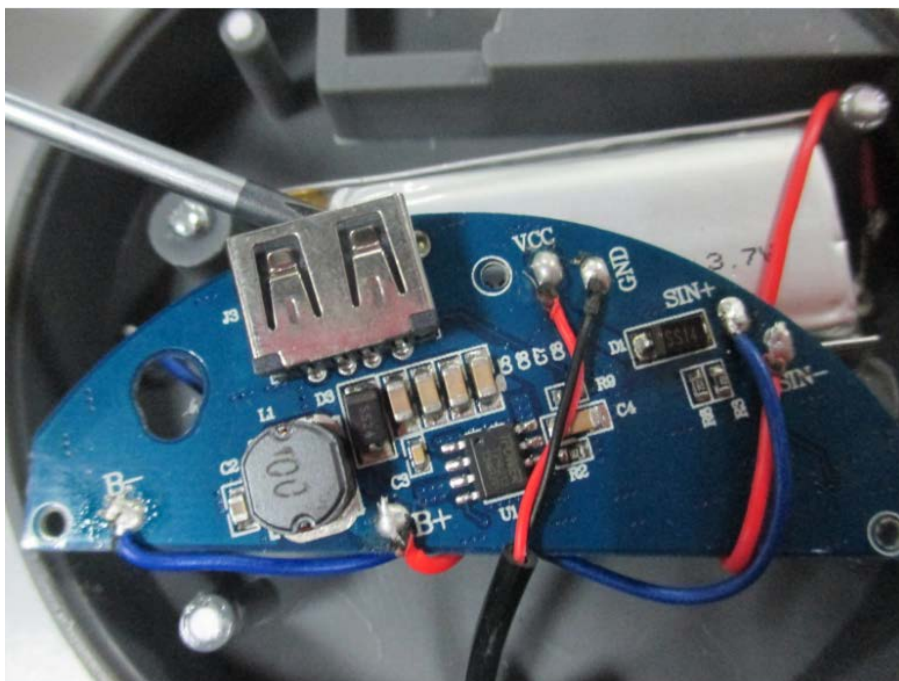

Battery view

