

EMC TEST REPORT
for

Power Bank
Model No.: P324.952

Prepared for :
Address :

Prepared by : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011510042E
Date of Test : Oct. 10~15, 2015
Date of Report : Oct. 15, 2015

TABLE OF CONTENT

Description

Page

Test Report Verification

1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility.....	5
1.3. Measurement Uncertainty.....	5
1.4. Test Summary.....	6
1.5. EMS Performance Criteria.....	6
2. RADIATED EMISSION TEST.....	7
2.1. Block Diagram of Test.....	7
2.2. Measuring Standard.....	7
2.3. Radiated Emission Limits.....	7
2.4. EUT Configuration on Test.....	8
2.5. Operating Condition of EUT.....	8
2.6. Test Procedure.....	8
2.7. Test Equipment.....	8
2.8. Measuring Results.....	8
3. ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	11
3.1. Block Diagram of Test Setup.....	11
3.2. Measuring Standard.....	11
3.3. Severity Levels and Performance Criterion.....	11
3.4. EUT Configuration.....	11
3.5. Operating Condition of EUT.....	12
3.6. Test Procedure.....	12
3.7. Test Equipment.....	12
3.8. Measuring Results.....	12
4. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	14
4.1. Block Diagram of Test.....	14
4.2. Measuring Standard.....	14
4.3. Severity Levels and Performance Criterion.....	14
4.4. EUT Configuration on Test.....	15
4.5. Operating Condition of EUT.....	15
4.6. Test Procedure.....	15
4.7. Test Equipment.....	15
4.8. Measuring Results.....	15
5. PHOTOGRAPHS.....	17
5.1. Photo of Radiated Emission Test.....	17
5.2. Photo of Electrostatic Discharge Test.....	17
5.3. Photo of RF Field Strength susceptibility Test.....	18

APPENDIX I (Photos of the EUT) (3 Pages)

TEST REPORT VERIFICATION

Applicant :
Manufacturer :
EUT : Power Bank
Model No. : P324.952
Rating : Input: DC 5V, 1A
Output: DC 5V, 1A
Trade Mark : N.A.

Measurement Procedure Used:
EN 55022: 2010+AC: 2011;
EN 55024: 2010;
(IEC 61000-4-2; IEC 61000-4-3)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55022 and EN 55024 requirements. The Project in IEC 61000-4-3 was tested in Shenzhen EMTEK Co., Ltd.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 10~15, 2015

Prepared by :



Kebo Zhang
(Engineer/ Kebo Zhang)

Reviewer :

Oliay Yang
(Project Manager/ Oliay Yang)

Approved & Authorized Signer :

Tom Chen
(Manager/ Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Power Bank

Model Number : P324.952

Test Power Supply : DC 5V

Applicant :
Address :

Manufacturer :
Address :

Factory :
Address :

Date of receipt : Oct. 10, 2015

Date of Test : Oct. 10~15, 2015

1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, February 22, 2013.

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

Test Location

All Emissions tests were performed
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC
Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen,
Guangdong, China

1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1dB (Horizontal)
Ur = 4.3dB (Vertical)

Conduction Uncertainty : $U_c = 3.4\text{dB}$

1.4. Test Summary

For the EUT described above. The standards used were EN 55022 for Emissions & EN 55024 for Immunity.

Table 1 : Tests Carried Out Under EN 55022: 2010+AC: 2011

Standard	Test Items	Status
EN 55022: 2010+AC: 2011 (Class B)	Power Line Conducted Emission Test (150KHz To 30MHz)	x
EN 55022: 2010+AC: 2011 (Class B)	Radiated Emission Test (30MHz To 1000MHz)	√

Table 2 : Tests Carried Out Under EN 55024: 2010

Standard	Test Items	Status
EN 55024: 2010	Electrostatic Discharge immunity Test	√
EN 55024: 2010	RF Field Strength susceptibility Test	√
EN 55024: 2010	Electrical Fast Transient/Burst Immunity Test	x
EN 55024: 2010	Surge Immunity Test	x
EN 55024: 2010	Injected Currents Susceptibility Test	x
EN 55024: 2010	Magnetic Field Susceptibility Test	x
EN 55024: 2010	Voltage Dips and Interruptions Test	x

- √ Indicates that the test is applicable
x Indicates that the test is not applicable

1.5. EMS Performance Criteria

- √ A: Normal performance within the specification limits
- √ B: Temporary degradation or loss of function or performance which is self-recoverable
- √ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- √ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data


2. RADIATED EMISSION TEST

2.1. Block Diagram of Test

2.1.1. Block diagram of connection between the EUT and simulators



2.1.2. Block diagram of test setup (In chamber)

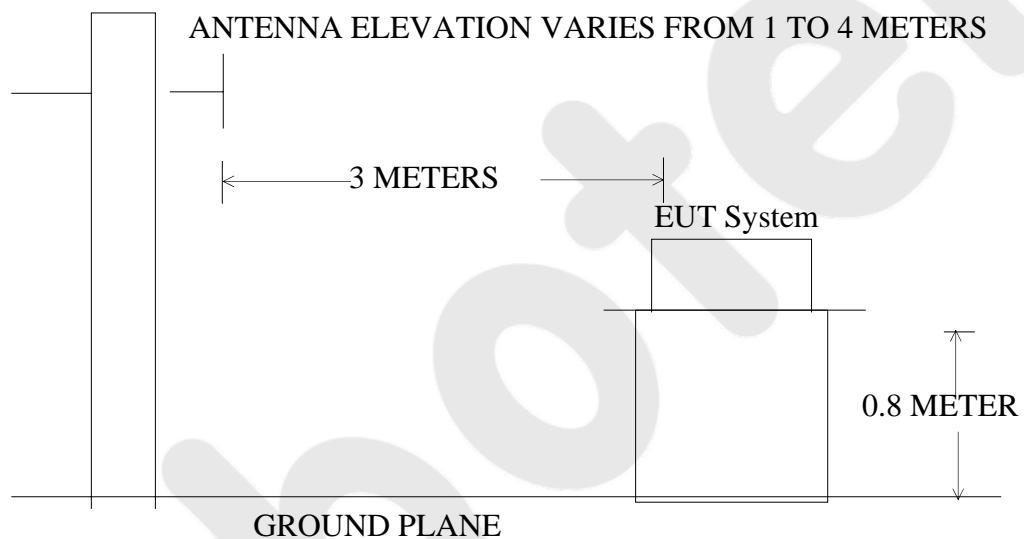

2.2. Measuring Standard

EN 55022: 2010+AC: 2011 (Class B)

2.3. Radiated Emission Limits

2.3.1. EN 55022: 2010+AC: 2011 (Class B)

Radiated Emission Limits

All emanations from an EN 55022 device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

- Note:
- (1) The smaller limit shall apply at the combination point between two frequency bands.
 - (2) Distance refers to the distance in meters between the

measuring instrument antenna and the closed point of any part of the EUT.

2.4. EUT Configuration on Test

The EN 55022 regulations test method must be used to find the maximum emission during radiated emission measurement.

2.5. Operating Condition of EUT

2.5.1. Turn on the power.

2.5.2. Let the EUT work in test mode (Full Load) and measure it.

2.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 2.8.

2.7. Test Equipment

The following test equipments are used during the radiated emission measurement:


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2015	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2015	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2015	1 Year

2.8. Measuring Results

PASS.


The frequency range from 30MHz to 1000MHz is investigated.

Job No.: AT011510042E Polarization: Vertical
Standard: (RE)EN 55022_class B_3m Power Source: DC 5V
Test item: Radiation Test Temp.(°C)/Hum.(%RH): 24.3(°C)/55%RH
Note: Full Load Distance: 3m

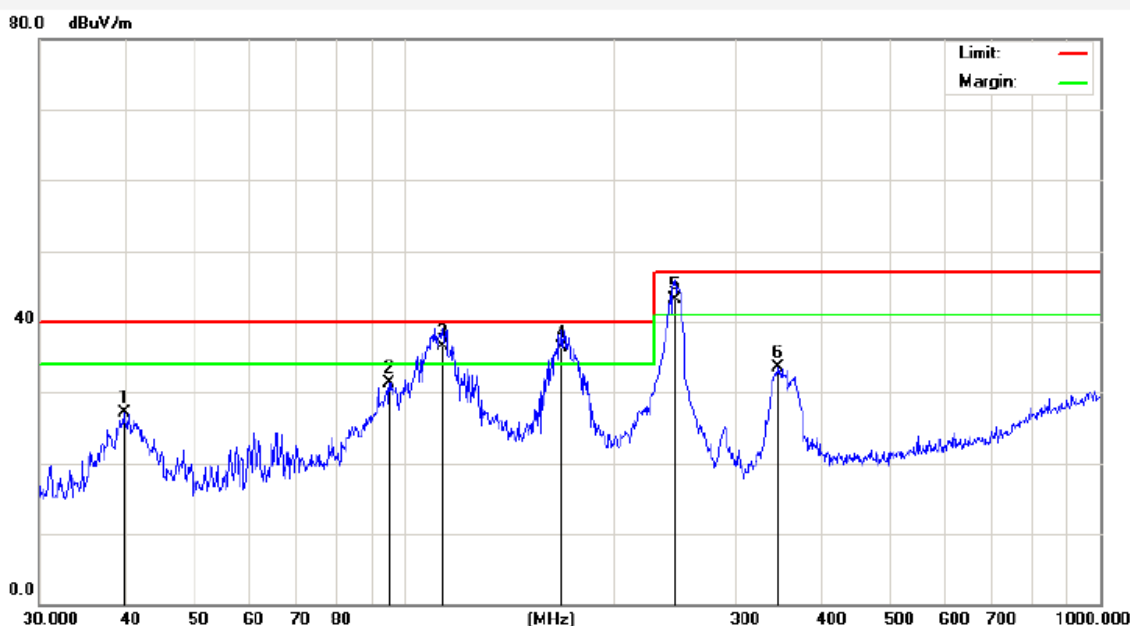

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.7146	37.64	-10.59	27.05	40.00	-12.95	peak			
2	95.4270	47.33	-16.00	31.33	40.00	-8.67	peak			
3	114.1137	52.47	-15.92	36.55	40.00	-3.45	QP	100	0	
4	169.0054	53.87	-17.60	36.27	40.00	-3.73	QP	100	360	
5	245.0900	57.25	-14.06	43.19	47.00	-3.81	QP	100	0	
6	344.3854	46.64	-13.17	33.47	47.00	-13.53	peak			

Job No.: AT011510042E Polarization: Horizontal
Standard: (RE)EN 55022_class B_3m Power Source: DC 5V
Test item: Radiation Test Temp.(°C)/Hum.(%RH): 24.3(°C)/55%RH
Note: Full Load Distance: 3m

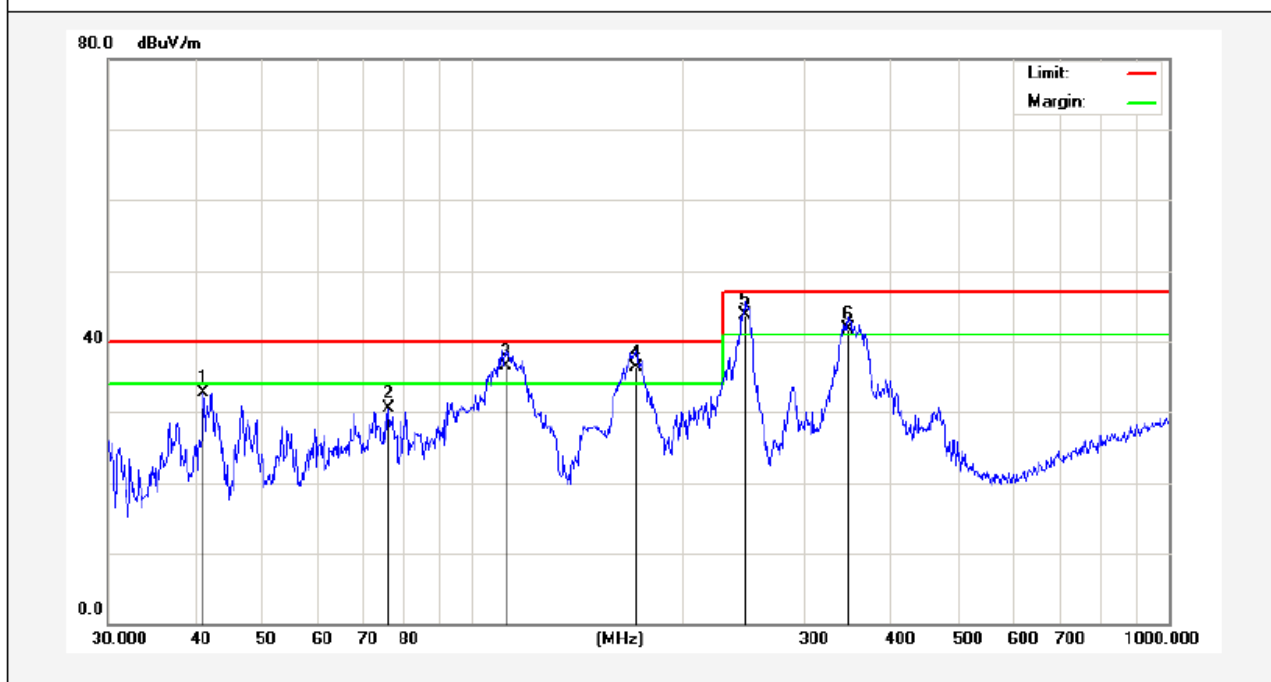


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	41.1319	43.53	-10.81	32.72	40.00	-7.28	peak			
2	75.7113	51.38	-20.79	30.59	40.00	-9.41	peak			
3	111.7379	57.26	-20.74	36.52	40.00	-3.48	QP	100	0	
4	171.9945	58.63	-22.42	36.21	40.00	-3.79	QP	100	360	
5	246.8148	62.13	-18.40	43.73	47.00	-3.27	QP	100	0	
6	346.8091	55.87	-14.08	41.79	47.00	-5.21	QP	100	360	


3. ELECTROSTATIC DISCHARGE IMMUNITY TEST

3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



3.1.2. Block diagram of test setup

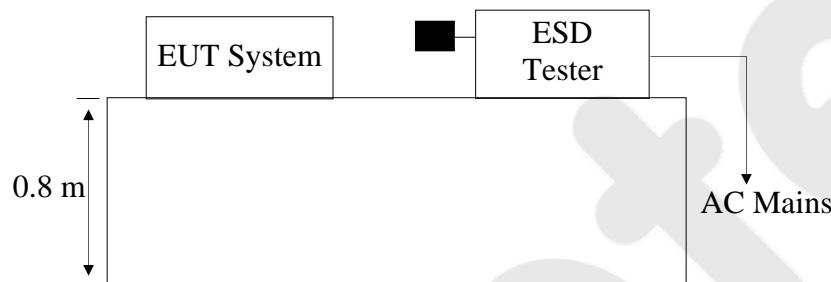

3.2. Measuring Standard

EN 55024: 2010

IEC 61000-4-2

Severity Level: 3 / Air Discharge: $\pm 8\text{kV}$ Level: 2 / Contact Discharge: $\pm 4\text{kV}$

3.3. Severity Levels and Performance Criterion

3.3.1. Severity level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

3.3.2. Performance criterion: **B**

3.4. EUT Configuration

The following equipments are installed on electrostatic discharge immunity measurement to meet EN 55024 requirements and operating in a manner which

tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5 except the test set up replaced by Section 3.1.

3.6. Test Procedure

3.6.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 100 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

3.6.2. Contact Discharge:

All the procedure shall be same as Section 3.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

3.6.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

3.6.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

3.7. Test Equipment

The following test equipments are used during the electrostatic discharge immunity measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3ctest	ESD-30G	EC0281019	Apr. 17, 2015	1 Year

3.8. Measuring Results

PASS

Please refer to the following page

Electrostatic Discharge Test Results

Shenzhen Anbotek Compliance Laboratory Limited

Test Mode :	Full Load	Temperature :	24℃
Power Supply :	DC 5V	Humidity :	53%
Criterion required :	B	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Air Discharge: ±8kV			
Contact Discharge: ±4kV # For each point positive 10 times and negative 10 times discharge			
Location		Kind A-Air Discharge C-Contact Discharge	Result
Slot of the EUT	8 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Others	8 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
USB Port	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Metal surface of EUT	8 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the front	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the rear	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the left	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the right	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
<p>Note:</p> <p>Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).</p>			


4. RF FIELD STRENGTH SUSCEPTIBILITY TEST

4.1. Block Diagram of Test

4.1.1. Block diagram of connection between the EUT and simulators



4.1.2. Block diagram of RS test setup

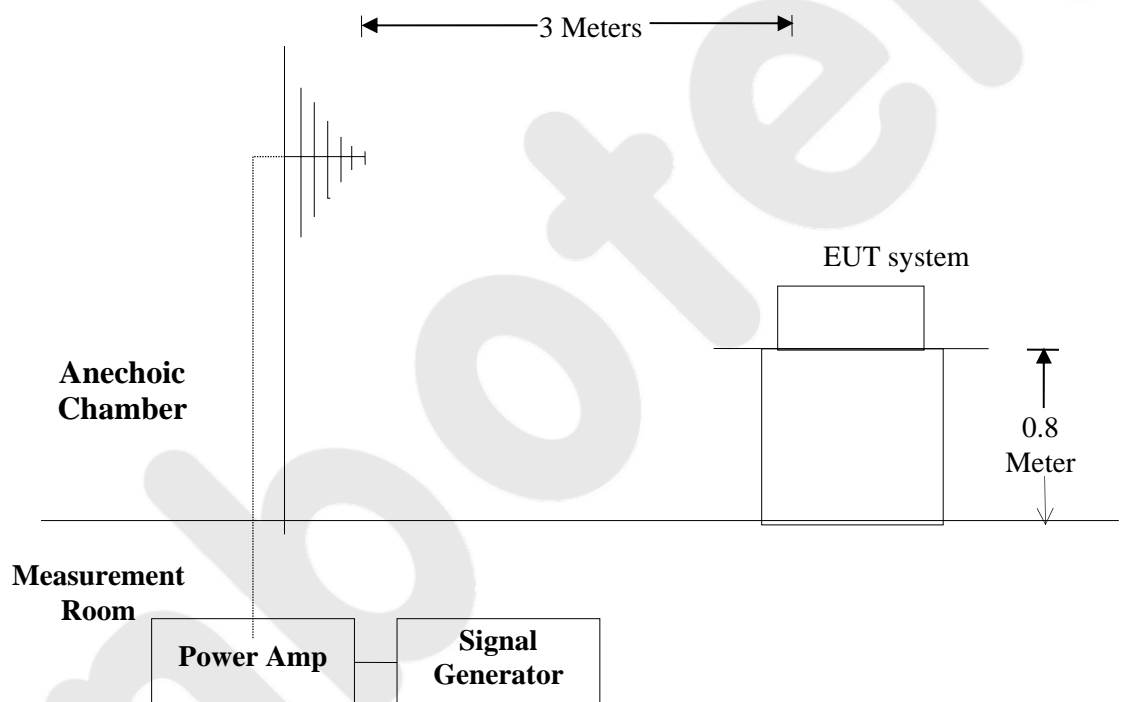

4.2. Measuring Standard

EN 55024: 2010
IEC 61000-4-3
Severity Level: 2, 3V / m

4.3. Severity Levels and Performance Criterion

4.3.1. Severity Levels

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

4.3.2. Performance Criterion: A

4.4. EUT Configuration on Test

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

4.5. Operating Condition of EUT

Same as conducted emission measurement which is listed in Section 2.5. except the test setup replaced as Section 4.1.

4.6. Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor its screen.

All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
2. Dwell Time	1 Sec.

4.7. Test Equipment

The following test equipments are used during the RF Field Strength susceptibility measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RF Power Meter. Dual Channel	BOONTON	4232A	10539	May 29, 2015	1 year
2.	50ohm Diode Power Sensor	BOONTON	51011EMC	34236/34238	May 29, 2015	1 year
3.	Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120 L3F	332	May 29, 2015	1 year
4.	Power Amplifier	PRANA	AP32MT215	N/A	May 29, 2015	1 year
5.	Power Amplifier	MILMEGA	AS0102-55	N/A	May 29, 2015	1 year
6.	Signal Generator	AEROFLEX	2023B	N/A	May 29, 2015	1 year
7.	Field Strength Meter	HOLADAY	HI-6005	N/A	May 29, 2015	1 year
8.	RS232 Fiber Optic Modem	HOLADAY	HI-4413P	N/A	May 29, 2015	1 year
9.	Log.-Per. Antenna	SCHWARZBECK	VULP 9118E	N/A	May 29, 2015	1 year

4.8. Measuring Results

PASS.

Please refer to the following page.


RF Field Strength Susceptibility Test Results

Shenzhen Anbotek Compliance Laboratory Limited

Test Mode : Full Load Field Strength : 3V/m Criterion required : A Power Supply : DC 5V			Temperature : 25°C Humidity : 55% Frequency Range : 80 MHz to 1000 MHz Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Modulation : <input checked="" type="checkbox"/> AM 1 KHz 80% <input type="checkbox"/> Pulse <input type="checkbox"/> none					
Steps 1 %		Frequency Rang: 80-1000MHz		Result	
		Horizontal	Vertical		
Front		PASS	PASS	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D	
Right		PASS	PASS	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D	
Rear		PASS	PASS	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D	
Left		PASS	PASS	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D	
Note: The Project was tested in Shenzhen EMTEK Co., Ltd.					

5. PHOTOGRAPHS


5.1. Photo of Radiated Emission Test

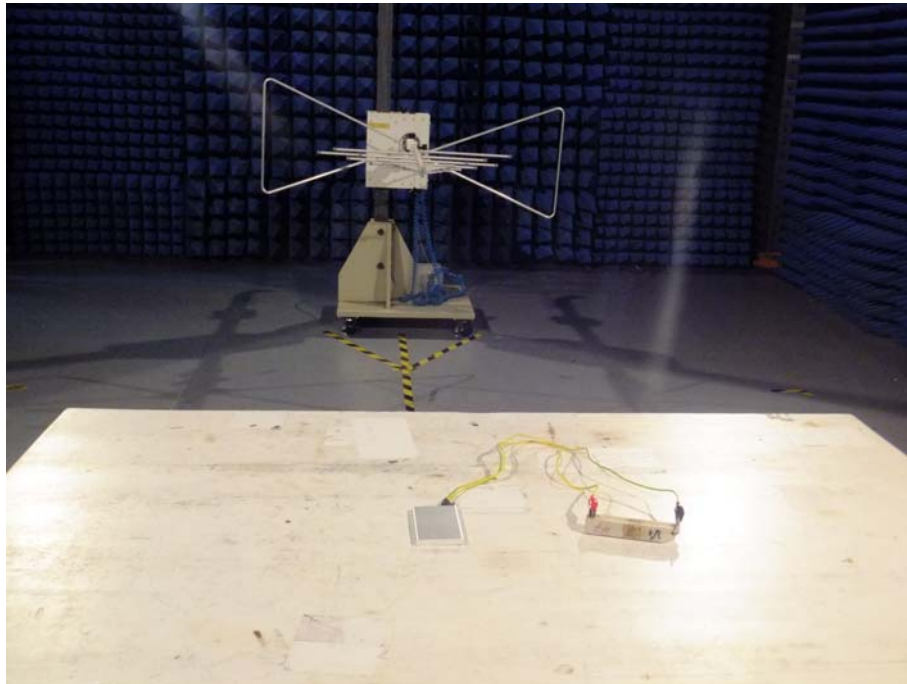

5.2. Photo of Electrostatic Discharge Test



5.3. Photo of RF Field Strength susceptibility Test

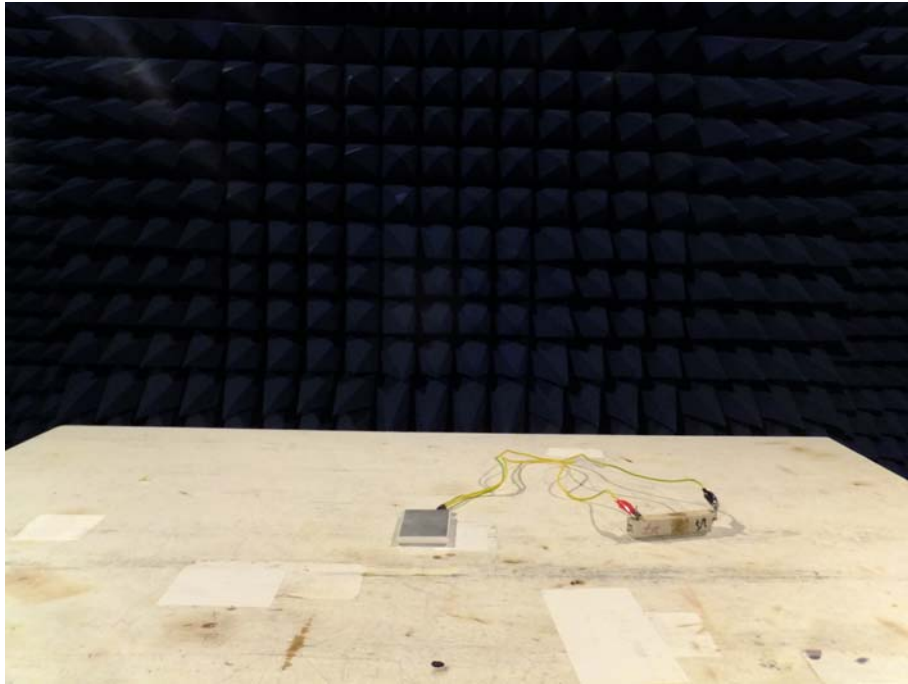

APPENDIX I (Photos of EUT)

Figure 1
The EUT- Front View



Figure 2
The EUT- Back View



Figure 3
The EUT- Side View




Figure 4
The EUT- Inside View



Figure 5
PCB of The EUT- Front View



Figure 6
PCB of The EUT- Back View

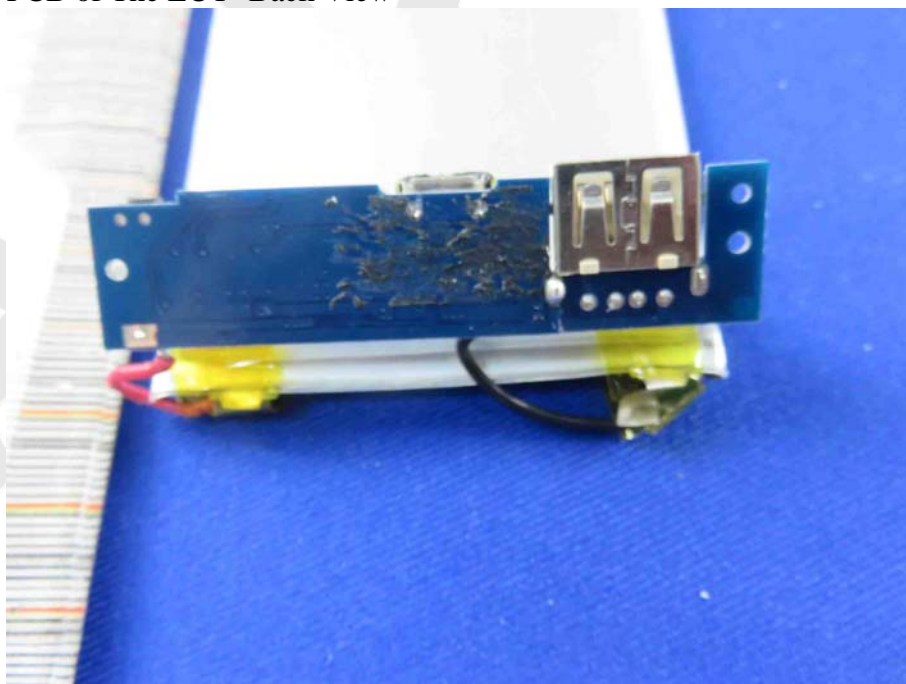

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:
If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.
2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.
3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.
4. The CE marking must be affixed visibly, legibly and indelibly.
It must have the same height as the initials 'CE'.