

No.: ED170418068CEV1-06 Date: April 25, 2017 Page 1 of 12

Applicant : Address :

Sample Name : Flashlight
Style/Item No. : P513.722
Sample Received Date : April 18, 2017
Testing Completed Date : April 25, 2017

**Test Requested**: As requested by client, to evaluate the compliance of the submitted sample

with the Directive 2011/65/EU and amendment directive 2015/863/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic

equipment.

**Test Method** : 1. Review was performed for the sample and the related Bill of Material

submitted by the Applicant.

2. a) To refer to the standard IEC 62321-3-1:2013: Screening by XRF Spectroscopy.

b) Wet chemical test

1) to refer to IEC 62321-5: 2013, determine the Cadmium, Lead content by ICP-OES.

2) to refer to IEC 62321-4: 2013, determine the Mercury content by ICP-OES.

3) to refer to IEC 62321:2008 Ed.1 & IEC 62321-7-1:2015, determine the Hexavalent Chromium content by UV-VIS.

4) to refer to IEC 62321-6:2015, determine the Polybrominated Biphenyls and Polybrominated Diphenyl Ethers by GC-MS.

**Test Results**: Please refer to next page (s).





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 2 of 12

### Conclusion:

Basing on the test results obtained from the homogenous materials, the submitted sample **COMPLIES** with the requirements stated in the Annex II of RoHS Directive 2011/65/EU and amendment directive 2015/863/EU.

Signed for and on behalf of EMTEK (Dongguan) Co., Ltd.

Prepared by:

Cherry Zhu

Report Engineer

Reviewed by:

Carrie Zhang Supervisor Approved by:

Lab Director

Lainey Qin





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 3 of 12

### **Test Results:**

No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
ELENVIEL C	Black soft plastic	Pb	BL			
		Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
VILET EST		Pb	BL			
E E E E VIE		Cd	BL			
2	Silver metal	Hg	BL	NA	Non comment	
ALEE VALE		Cr	BL			
STATE TO STATE OF THE STATE OF		Br	NA			
EL TERVIER	Black soft plastic	Pb	BL			
ALLEY E		Cd	BL		Non comment	
3		Hg	BL	NA		
ELLVILE ELLV		Cr	BL			
ALEKE BYA		Br	BL			
	Black hard plastic	Pb	BL			
4		Cd	BL			
		Black hard plastic	Hg	BL	NA	Non comment
		Cr	BL			
FELVIEFE		Br	BL			
VITE FERVY	Silver metal	Pb	BL	NA		
		Cd	BL		Non comment	
5		Hg	BL			
		Cr	BL			
		Br	NA			
	White hard plastic with silver coating	Pb	BL			
of West of		Cd	BL		Non comment	
6		Hg	BL	NA		
ALTER OF	5111 to 2-2-711 d	Cr	BL			
TELEVICE TO		Br	BL			





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 4 of 12

No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
	Translucent hard plastic	Pb	BL			
		Cd	BL			
7		Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
E TYLET		Pb	BL			
		Cd	BL			
8	Black hard plastic	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
LY LEFER A	Silver metal	Pb	BL		Non comment	
EL CALLER		Cd	BL			
9		Hg	BL	NA		
CELANTEL A		Cr	BL			
ELVITER ELV		Br	NA			
10	Beige hard plastic	Pb	BL		Non comment	
		Cd	BL	NA		
		Hg	BL			
		Cr	BL			
		Br	BL			
EL VIET	Silver metal	Pb	BL	NA	Non comment	
11		Cd	BL.			
		Hg	BL			
Mark Car		Cr	BL			
TELLY LET		Br	NA			
12	Silver metal	Pb	BL			
		Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
A VIET E		Br	NA			





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 5 of 12

No.	Sample description	Restricted substances	Results of EDXRF <sup>(1)</sup>	Results of Chemical Testing <sup>(2)</sup> (mg/kg)	Remark	
13	Silver metal	Pb	BL			
		Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
		Br	NA			
PANTER!		Pb	BL			
		Cd	BL			
14	White PCB	Hg	BL	PBBs:ND PBDEs:ND	Non comment	
		Cr	BL			
		Br	X			
NIE EE	White PCB	Pb	BL			
ET ET ATTE		Cd	BL		Non comment	
15		Hg	BL	PBBs:ND PBDEs:ND		
		Cr	BL			
		Br	X			
16	SMD LED	Pb	BL		Non comment	
		Cd	BL			
		Hg	BL	NA		
		Cr	BL			
		Br	BL			
ER EN VIEW	Green PCB	Pb	BL			
17		Cd	BL		Non comment	
		Hg	BL	PBBs:ND PBDEs:ND		
		Cr	BL	1,555,110		
		Br	X			
18	Transparent hard plastic	Pb	BL			
		Cd	BL			
		Hg	BL	PBBs:ND PBDEs:ND	Non comment	
Carlot Carlot		Cr	BL			
A VIET E		Br	X			





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 6 of 12

- Remark: (1) ① Results are obtained by XRF for primary screening, and further wet chemical testing by ICP-OES / AAS (for Cd, Pb, Hg), UV-VIS (for Cr(VI)) and GC/MS (for PBBs, PBDEs) is recommended to be performed, if an inconclusive result was found (as "X" in below table) (unit: mg/kg).
  - ② OL = Over Limit, BL = Below Limit, X = Inconclusive, NA= Not Applicable.
  - ③ The XRF screening test for RoHS elements The reading may be different to the actual content in the sample be of non-uniformity composition.

Element	Polymer	Metal	Composite Materials		
Cd	$BL \leq (70-3\sigma) < X < (130+3\sigma)$ $\leq OL$	BL ≤(70-3 σ)< X <(130+3 σ) ≤ OL	LOD < X <(150+3 σ )≤ OL		
Pb	BL ≤(700-3 σ )< X <(1300+3 σ )≤ OL	BL $\leq$ (700-3 $\sigma$ )< X <(1300+3 $\sigma$ ) $\leq$ OL	BL ≤(500-3 σ)< X <(1500+3 σ)≤ OL		
Hg	BL ≤(700-3 σ)< X <(1300+3 σ)≤ OL	BL $\leq$ (700-3 $\sigma$ ) < X < (1300+3 $\sigma$ ) $\leq$ OL	BL ≤(500-3 σ)< X <(1500+3 σ)≤ OL		
Br	BL ≤ (300-3 <i>σ</i> )< X	NA	BL ≤ (250-3 σ )< X		
Cr Cr	BL ≤ (700-3 <i>σ</i> )< X	BL ≤ (700-3 σ )< X	BL ≤ (500-3 σ )< X		

- (2) ① mg/kg = ppm = 0.0001%, ND = Not Detected (Less than reporting limit value.).
  - 2) Unit, Reporting Limit (RL) and Requirement limit in wet chemical test.

Test items	Pb	Cd	Hg	Cr <sup>6+</sup> (Non-metal)	Cr <sup>6+</sup> (metal)	PBBs(single)	PBDEs(single)
Unit	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
RL	2	2	2	2	2	5	5
Requirement Limit	1000	100	1000	1000	Negative	1000	1000

3 According to IEC 62321:2008 & IEC 62321-7-1:2015, result on Cr<sup>6+</sup> for metal sample is shown as Positive/Negative.

Negative = Absence of  $Cr^{6+}$  coating, Positive = Presence of  $Cr^{6+}$  coating. Storage condition and production date of the tested sample are unavailable and thus results of  $Cr^{6+}$  represent status of the sample at the time of testing.

According to IEC 62321-3-1:2013, this column represents the results of wet chem test. And "NA" means no need to perform wet chem test, when the XRF sereening results are qualified.





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 7 of 12

Photo Appendix









No.: ED170418068CEV1-06 Date: April 25, 2017 Page 8 of 12

### Photo Appendix

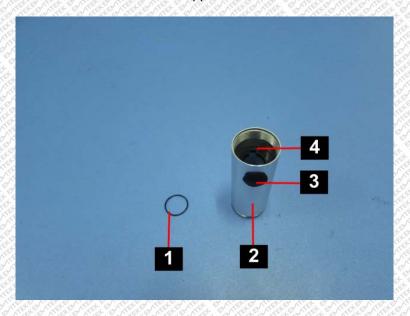

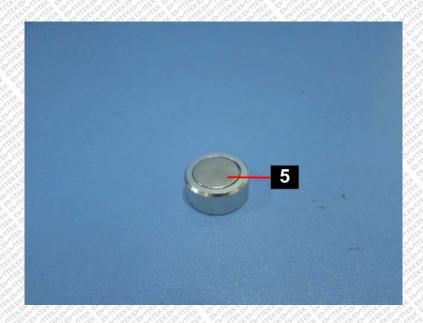







No.: ED170418068CEV1-06 Date: April 25, 2017 Page 9 of 12

### Photo Appendix

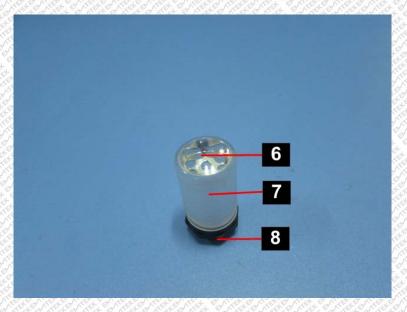

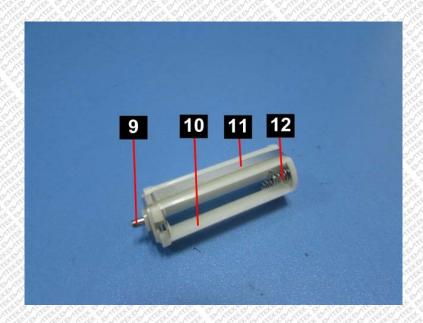






No.: ED170418068CEV1-06 Date: April 25, 2017 Page 10 of 12

### Photo Appendix

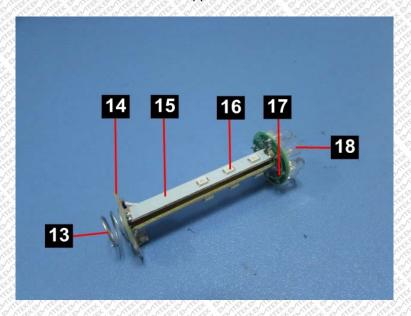

\* \* \* \* \* \* The End \* \* \* \* \* \*





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 11 of 12

### ANNEX

### **EXEMPTION LIST**

- Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):
- For general lighting purposes < 30W: 5mg (expires on 31 December 2011; 3.5mg may be used per burner after 31 December 2011 until 31 December 2012; 2.5mg shall be used per burner after 31 December 2012) 1(a)
- For general lighting purposes ≥ 30W and <50W: 5mg (expires on 31 December 2011, 3.5mg may be used per burner after 31 1(b) December 2011)
- For general lighting purposes ≥ 50W and <150W: 5mg 1(c)
- 1(d) For general lighting purposes ≥ 150W: 15mg
- For general lighting purposes with circular or square structural shape and tube diameter ≤17mm (no limitation of use until 31 1(e) December 2011; 7mg may be used per burner after 31 December 2011)
- For special purposes: 5mg 1(f)
- For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg (Expires on 31 December 2017) 1(g)
- Mercury in double-capped linear fluorescent lamps for general lighting purples not exceeding (per lamp): 2(a)
- 2(a)(1) Tri-band phosphor with normal lifetime and a tube diameter < 9mm (e.g. T2): 5mg (expires on 31 December 2011; 4mg may be used per lamp after 31 December 2011)
- 2(a)(2) Tri-band phosphor with normal lifetime and a tube diameter ≥ 9mm and ≤ 17mm (e.g. T5): 5mg (expires on 31 December 2011; 3mg may be used per lamp after 31 December 2011)
- 2(a)(3) Tri-band phosphor with normal lifetime and a tube diameter > 17mm and ≤ 28mm (e.g. T8): 5mg (expires on 31 December 2011; 3.5mg may be used per lamp after 31 December 2011)
- Tri-band phosphor with normal lifetime and a tube diameter > 28mm (e.g. T12): 5mg (expires on 31 December 2012; 3.5mg 2(a)(4)may be used per lamp after 31 December 2012)
- Tri-band phosphor with long lifetime (≥ 25000h): 8mg (expires on 31 December 2011; 5mg may be used per lamp after 31 2(a)(5)December 2011)
- 2(b) Mercury in other fluorescent lamps not exceeding (per lamp):
- 2(b)(2)Non-linear halophosphate lamps (all diameters): 15mg (expires on 13 April 2016)
- Non-linear tri-band phosphor lamps with tube diameter > 17mm (e.g. T9) (no limitation of use until 31 December 2011; 15mg 2(b)(3)may be used per lamp after 31 December 2011)
- 2(b)(4) Lamps for other general lighting and special purposes (e.g. induction lamps) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 3 Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):
- Short length (≤ 500mm) (No limitation of use until 31 December 2011; 3.5mg may be used per lamp after 31 December 2011) 3(a)
- Medium length (> 500m and ≤ 1500mm) (No limitation of use until 31 December 2011; 5mg may be used per lamp after 31 3(b) December 2011)
- Long length (> 1500mm) (No limitation of use until 31 December 2011; 13mg may be used per lamp after 31 December 2011) 3(c)
- Mercury in other low pressure discharge lamps (per lamp) (no limitation of use until 31 December 2011; 15mg may be used per 4(a)lamp after 31 December 2011)
- Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with 4(b) improved colour rendering index Ra > 60:
- 4(b)-I P ≤ 155W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 155W < P ≤ 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011) 4(b)-II
- 4(b)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011) Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):
- 4(c)
- P≤ 155W (no limitation of use until 31 December 2011; 25mg may be used per burner after 31 December 2011) 4(c)-l 155W < P ≤405W (no limitation of use until 31 December 2011; 30mg may be used per burner after 31 December 2011)
- 4(c)-II
- 4(c)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- Mercury in High Pressure Mercury (vapour) lamps (HPMV) (expires on 13 April 2015) 4(d)
- Mercury in metal halide lamps (MH) 4(e)
- 4(f) Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex
- Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and light-4(g) artwork, where the mercury content shall be limited as follows: (Expires on 31 December 2018)
  - (a) 20 mg per electrode pair + 0,3 mg per tube length in cm, but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20 ° C;
  - (b) 15 mg per electrode pair + 0,24 mg per tube length in cm, but not more than 80 mg, for all other indoor applications.





No.: ED170418068CEV1-06 Date: April 25, 2017 Page 12 of 12

### **ANNEX**

### **EXEMPTION LIST**

### Continued

	7 6 7 76 1	SUNKE ISUNKEL BOANEROANEROANEROANEROANEROANEROANEROANER
1	5(a)	Lead in glass of cathode ray tubes
	5(b)	Lead in glass of fluorescent tubes not exceeding 0.2% by weight
	6(a)	Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0.35% lead by weight
	6(b)	Lead as an alloying element in aluminium containing up to 0.4% lead by weight
7	6(c)	Copper alloy containing up to 4% lead by weight.
	7(a)	Lead in high melting temperature type solders (i.e. lead based alloys containing 85% by weight or more lead)
3	7(b)	Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications
	7(c)-l	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g.
1	TELY YELLE	piezoelectronic devices, or in a glass or ceramic matrix compound
3	7(c)-II	Lead in dielectric ceramic in capacitors for a rated voltage of 125V AC or 250V DC or higher
	7(c)-III	Lead in dielectric ceramic in capacitors for a rated voltage of less than 125V AC or 250V DC (expires on 1 January 2013 and
	ELVIEL E	after that date may be used in spare parts for EEE placed on the market before 1 January 2013).
	7(c)-IV	Lead in PZT based dielectric ceramic materials for capacitors being part of integrated circuits or discrete semiconductors
	8(a)	Cadmium and its compounds in one shot pellet type thermal cut-offs (expires on 1 January 2012 and after that date may be
	A VIETERY	used in spare parts for EEE placed on the market before 1 January 2012)
	8(b)	Cadmium and its compounds in electrical contacts
	9	Hexavalent chromium as an anti-corrosion agent of the carbon steel cooling system in absorption refrigerators up to 0.75% by
	VIETER	weight in the cooling solution
	9(b)	Lead in bearing shells and bushes for refrigerant-containing compressors for heating, ventilation, air conditioning and
	EX ELVILER	refrigeration (HVACR) applications
1	11(b)	Lead used in other than C-press compliant pin connector systems (expires on 1 January 2013 and after that date may be used
	A CLEAN EN	in spare parts for EEE placed on the market before 1 January 2013)
	13(a)	Lead in white glasses used for optical applications
	13(b)	Cadmium and lead in filter glasses and glasses used for reflectance standards
0	14	Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80% and less than 85% by weight (expires on 1 January 2011 and after that date may be used
1	FEAVIER E	in spare parts for EEE placed on the market before 1 January 2011)
	15	Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit Flip
	VIET ELVI	Chip packages
-	17	Lead halide as radiant agent in High Intensity Discharge (HID) lamps used for professional reprography applications
	18(b)	Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as sun tanning lamps
	CONTRACTOR OF THE PARTY OF THE	containing phosphors such as BSP (BaSi <sub>2</sub> O <sub>5</sub> :Pb)
	21	Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glass
	24	Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors
	25	Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring
2	29	Lead bound in crystal glass as defined in Annex 1 (Categories 1, 2, 3 and 4) of Council Directive 69/493/EEC
7	30	Cadmium alloys as electrical/mechanical solder joints to electrical conductors located directly on the voice coil in transducers
	ELLEZVILER	used in high-powered loudspeakers with sound pressure levels of 100 dB (A) and more
3	31	Lead in soldering materials in mercury free flat fluorescent lamps (which e.g. are used for liquid crystal displays, design or
-	ELV VEFEE	industrial lighting)
	32	Lead oxide in seal frit used for making window assemblies for Argon and Krypton laser tubes
	33	Lead in solders for the soldering of thin copper wires of 100 µm diameter and less in power transformers
	34	Lead in cermet-based trimmer potentiometer elements
1	37	Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body
	38	Cadmium and cadmium oxide in thick film pastes used on aluminium bonded beryllium oxide
	39	Cadmium in colour converting II-VI LEDs (< 10 µg Cd per mm² of light- emitting area) for use in solid state illumination or
1	11	display systems (expires on 1 July 2014)  Load in solders and formination finishes of electrical and electronic components and finishes of printed circuit beards used in

This Test Report is issued by the Company subject to its Conditions of Issuance of Test Reports printed overleaf and is intended for your exclusive use. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. This test report includes all of the tests requested by you and the results thereof based upon the information that you provided. You have 30 days from date of issuance of this test report to notify us of any error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

ignition modules and other electrical and electronic engine control systems, which for technical reasons must be mounted directly on or in the crankcase or cylinder of hand-held combustion engines (classes SH:1, SH:2, SH:3 of Directive 97/68/EC of



the European Parliament and of the Council (2)) (Expires on 31 December 2018)