

Battery Test Report

Report No.: A001R20161129027

Samples Li-ion Polymer Battery

Model 552535

Applicant

Issue Date 2016-12-12

深圳市鑫宇环检测有限公司


Attestation of Global Compliance (Shenzhen) Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

IEC 62133
**Secondary cells and batteries containing alkaline or other non-acid electrolytes —
 Safety requirements for portable sealed secondary cells, and for batteries made from them,
 for use in portable applications**

Report Reference No..... : A001R20161129027

Tested by (+ signature)..... : Jiajia Xue



Reviewed by (+ signature) : Huiming Zhu



Approved by (+signature) : Haibin Liu



Date of issue..... : 2016-12-12

Contents..... : Total 21 pages.

Testing laboratory

Name..... : Attestation of Global Compliance (Shenzhen) Co., Ltd.

 Address..... : 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu,
 Xixiang, Bao'an District, Shenzhen, Guangdong, China

Testing location..... : Same as above.

Applicant

Name..... :

Address..... :

Manufacturer

Name..... :

Address..... :

Test specification

Standard..... : IEC 62133:2012

Test procedure : Type test

Procedure deviation..... : N/A

Non-standard test method..... : N/A

Test Report Form/blank test report

Test Report Form No..... : AGC62133B1

Test Report Form(s) Originator..... : AGC

Master TRF..... : Dated 2015-04

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| | | | | |
|--|-------------|---|---------------|-----------------|
| Test item | | | | |
| Product designation..... | | Li-ion Polymer Battery | | |
| Brand name..... | | N/A | | |
| Test model..... | | 552535 | | |
| Rating(s)..... | | 3.7V, 450mAh, 1.665Wh | | |
| Test item particulars | | | | |
| Classification of installation and use..... | | N/A | | |
| Supply connection..... | | DC Lead wire | | |
| Recommend charging method declared by the manufacturer..... | | 0.2C constant current charge to 4.2V, then constant voltage 4.2V charge till charged current declines to 0.02C | | |
| Discharge current(0.2I _A)..... | | 90mA | | |
| Specified final voltage | | 3.0V | | |
| Chemistry | | <input type="checkbox"/> nickel systems <input checked="" type="checkbox"/> lithium systems | | |
| Recommend of charging limit for lithium system | | | | |
| Upper limit charging voltage per cell..... | | 4.25V | | |
| Maximum charging current..... | | 1800mA | | |
| Charging temperature upper limit..... | | 50℃ | | |
| Charging temperature lower limit..... | | -10℃ | | |
| Polymer cell electrolyte type..... | | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A | | |
| Test case verdicts | | | | |
| Test case does not apply to the test object..... | | N (/A) | | |
| Test item does meet the requirement..... | | P (ass) | | |
| Test item does not meet the requirement..... | | F (ail) | | |
| Testing | | | | |
| Date of receipt of test item | | 2016.11.28 | | |
| Date(s) of performance of test..... | | 2016.11.28-2016.12.12 | | |
| Attachment | | | | |
| Attachment A..... | | Photos of product | | |
| General remarks | | | | |
| This report shall not be reproduced except in full without the written approval of the testing laboratory. | | | | |
| The test results presented in this report relate only to the item tested. | | | | |
| “(See remark #)” refers to a remark appended to the report. | | | | |
| “(See appended table)” refers to a table appended to the report. | | | | |
| Throughout this report a point is used as the decimal separator. | | | | |
| <input checked="" type="checkbox"/> The product fulfils the requirements of EN62133: 2013. | | | | |
| Report Revise Record: | | | | |
| Report Version | Revise Time | Issued Date | Valid Version | Notes |
| V1.0 | / | 2016-12-12 | Valid | Original report |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

General product information

The main features of the battery are shown as below (clause 8.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|--------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 552535 | 450mAh | 3.7V | 90mA | 90mA | 1800mA | 900mA | 4.2V | 3.0V |

The main features of the battery are shown as below (clause 8.1.2):

| Model | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|--------|----------------------------|-------------------|--------------------------|--------------------------|
| 552535 | 4.25V | 22.5mA | -10℃ | 50℃ |


The main features of the cell are shown as below (clause 8.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|--------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 552535 | 450mAh | 3.7V | 90mA | 90mA | 1800mA | 900mA | 4.2V | 3.0V |

The main features of the cell are shown as below (clause 8.1.2):

| Model | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|--------|----------------------------|-------------------|--------------------------|--------------------------|
| 552535 | 4.25V | 22.5mA | -10℃ | 50℃ |


Construction

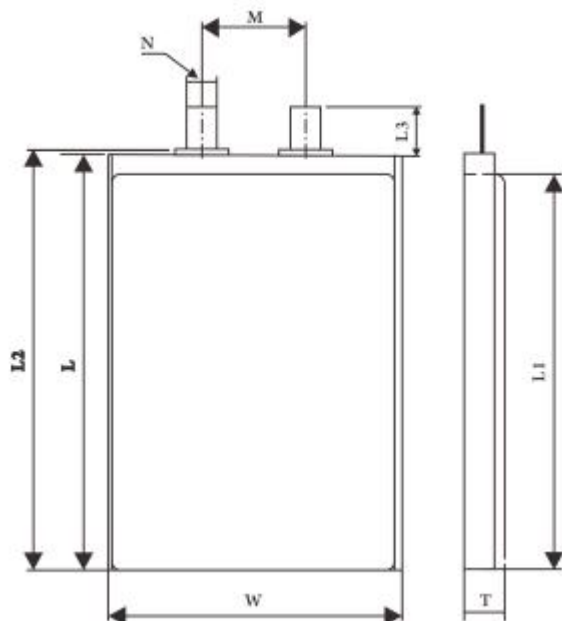

Cell

| | |
|---|----------|
| T | Max 5.5 |
| W | Max 25.0 |
| L | Max 35.2 |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed at <http://www.agc-cert.com>

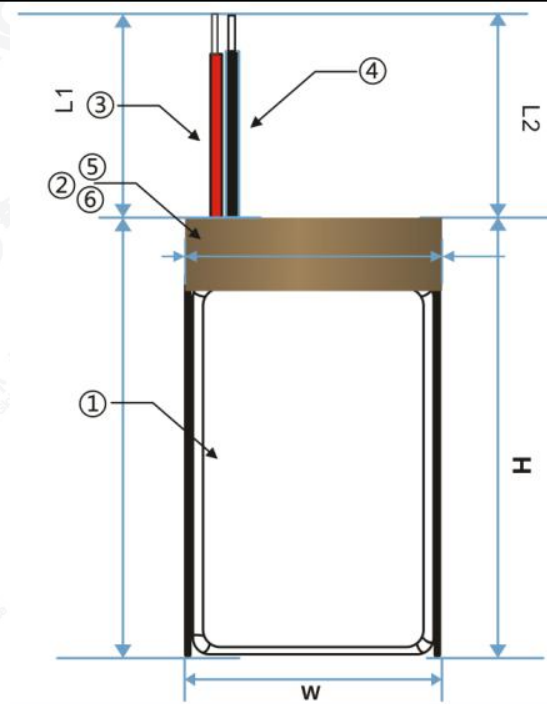

| | |
|-----------|--------|
| Thickness | 5.5mm |
| Width | 25.2mm |
| Height | 35.5mm |


Battery

Circuit diagram

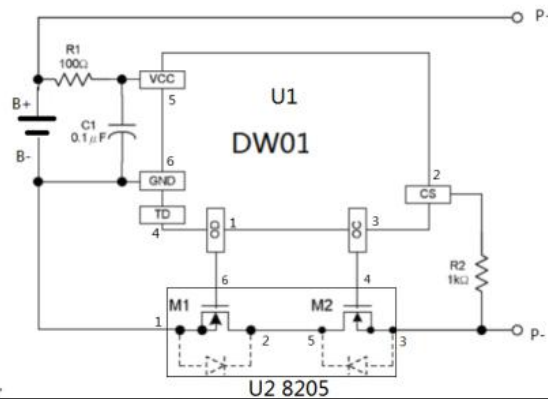

Copy of marking plate

This is reference label, final label should be including the content of it.

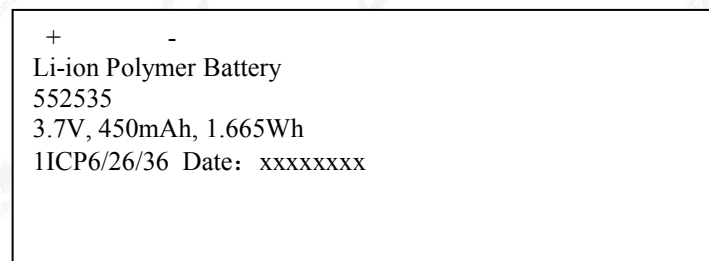

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|------------------------------------|----------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| 4 | Parameter measurement tolerances | | P |
| | Parameter measurement tolerances | Comply with relevant requirements. | P |

| | | | |
|----------|---|---|----------|
| 5 | General safety considerations | | P |
| 5.1 | General | | P |
| 5.2 | Insulation and wiring | | P |
| | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ | Not metal case exists. | N |
| | Insulation resistance (MΩ) : | | — |
| | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements | | P |
| | Orientation of wiring maintains adequate creepage and clearance distances between conductors | | P |
| | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse | | P |
| 5.3 | Venting | | P |
| | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition | Venting mechanism exists on the narrow side of pouch cell. | P |
| | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief | | N |
| 5.4 | Temperature/voltage/current management | | P |
| | Batteries are designed such that abnormal temperature rise conditions are prevented | Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 8. | P |
| | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer | See above. | P |
| | Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified | The charging limits specified in the user manual. | P |
| 5.5 | Terminal contacts | | P |
| | Terminals have a clear polarity marking on the external surface of the battery | See page 5 | P |
| | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current | | P |
| | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance | | P |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|---|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | Terminal contacts are arranged to minimize the risk of short circuits | | P |
| 5.6 | Assembly of cells into batteries | | P |
| 5.6.1 | If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer | Single cell battery. | N |
| | Each battery has an independent control and protection | | N |
| | Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly | | N |
| | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges | | N |
| | Protective circuit components are added as appropriate and consideration given to the end-device application | | N |
| | When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard | | N |
| 5.6.2 | Design recommendation for lithium systems only | | P |
| | For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or | Charging voltage: 4.2V, not exceed 4.25V specified in clause 8.1.2, Table 4 | P |
| | - Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1. | | N |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or | Single cell battery. | N |
| | - The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks | | N |
| | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or | | N |
| | - Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells | | N |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|-------------------------------------|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | or single cellblocks by measuring the voltage of every single cell or the single cellblocks | | |
| 5.7 | Quality plan | | P |
| | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | Complied. Quality plan provided. | P |

| | | | |
|----------|--|-------------------------------------|----------|
| 6 | Type test conditions | | P |
| | Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old | Complied. Lithium system. | P |
| | Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C±5°C | Tests are carried out at 20°C± 5°C. | P |

| | | | |
|----------|---|------------------------------------|----------|
| 7 | Specific requirements and tests (nickel systems) | | N |
| 7.1 | Charging procedure for test purposes | Not applicable for Lithium system. | N |
| 7.2 | Intended use | | N |
| 7.2.1 | Continuous low-rate charging (cells) | | N |
| | Results: No fire. No explosion | | N |
| 7.2.2 | Vibration | | N |
| | Results: No fire. No explosion. No leakage | | N |
| 7.2.3 | Moulded case stress at high ambient temperature (batteries) | | N |
| | Oven temperature (°C) | | N |
| | Results: No physical distortion of the battery casing resulting in exposure if internal components | | N |
| 7.2.4 | Temperature cycling | | N |
| | Results: No fire. No explosion. No leakage | | N |
| 7.3 | Reasonably foreseeable misuse | | N |
| 7.3.1 | Incorrect installation (cells) | | N |
| | The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or | | N |
| | - A stabilized dc power supply. | | N |
| | Results: No fire. No explosion | | N |
| 7.3.2 | External short circuit | | N |
| | The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or | | N |
| | - The case temperature declined by 20% of the maximum temperature rise | | N |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|-----------------|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | Results: No fire. No explosion | | N |
| 7.3.3 | Free fall | | N |
| | Results: No fire. No explosion | | N |
| 7.3.4 | Mechanical shock (crash hazard) | | N |
| | Results: No fire. No explosion. No leakage. | | N |
| 7.3.5 | Thermal abuse (cells) | | N |
| | Oven temperature (°C) : | | — |
| | Results: No fire. No explosion. | | N |
| 7.3.6 | Crushing of cells | | N |
| | The crushing force was released upon: - The maximum force of 13 kN ±1 kN has been applied; or | | N |
| | - An abrupt voltage drop of one-third of the original voltage has been obtained | | N |
| | The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set | | N |
| | Results: No fire. No explosion | | N |
| 7.3.7 | Low pressure (cells) | | N |
| | Chamber pressure (kPa) : | | — |
| | Results: No fire. No explosion. No leakage. | | N |
| 7.3.8 | Overcharge | | N |
| | Results: No fire. No explosion. | | N |
| 7.3.9 | Forced discharge (cells) | | N |
| | Results: No fire. No explosion. | | N |

| | | | |
|----------|---|--|----------|
| 8 | Specific requirements and tests (lithium systems) | | P |
| 8.1 | Charging procedures for test purposes | | P |
| 8.1.1 | First procedure: This charging procedure applied to tests other than those specified in 8.1.2 | | P |
| 8.1.2 | Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9 | | P |
| | If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5°C for the upper limit and minus 5°C for the lower limit | Charge temperature range -10-50°C declared. -15°C used for the lower limit. 55°C used for the upper limit. | P |
| | A valid rationale was provided to ensure the safety of the cell (see Figure A.1) : | | P |
| | For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4.25 V), the applied upper limit charging voltage and upper limit | 4.25V applied. | N |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|--|-------------------------|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | charging temperatures were adjusted accordingly | | |
| | A valid rationale was provided to ensure the safety of the cell (see Figure A.1) : | | N |
| 8.2 | Intended use | | P |
| 8.2.1 | Continuous charging at constant voltage (cells) | Tested complied. | P |
| | Results: No fire. No explosion | (See Table 8.2.1) | P |
| 8.2.2 | Moulded case stress at high ambient temperature (battery) | No moulded case exists. | N |
| | Oven temperature (°C) : | | — |
| | Results: No physical distortion of the battery casing resulting in exposure if internal components | | N |
| 8.3 | Reasonably foreseeable misuse | | P |
| 8.3.1 | External short circuit (cell) | | P |
| | The cells were tested until one of the following occurred: - 24 hours elapsed; or | | N |
| | - The case temperature declined by 20% of the maximum temperature rise | | P |
| | Results: No fire. No explosion | (See Table 8.3.1) | P |
| 8.3.2 | External short circuit (battery) | | P |
| | The cells were tested until one of the following occurred: - 24 hours elapsed; or | | P |
| | - The case temperature declined by 20% of the maximum temperature rise | | N |
| | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition | | N |
| | Results: No fire. No explosion | (See Table 8.3.2) | P |
| 8.3.3 | Free fall | | P |
| | Results: No fire. No explosion. | No fire. No explosion. | P |
| 8.3.4 | Thermal abuse (cells) | | P |
| | The cells were held at 130±2°C for: - 10 minutes; or | Tested complied. | P |
| | - 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281) | | N |
| | Oven temperature (°C) : | 130°C | — |
| | Gross mass of cell (g)..... : | <500g, small cell. | — |
| | Results: No fire. No explosion. | No fire. No explosion. | P |
| 8.3.5 | Crush (cells) | | P |
| | The crushing force was released upon: - The maximum force of 13 kN±1 kN has been applied; or | Tested complied. | P |
| | - An abrupt voltage drop of one-third of the original voltage has been obtained; or | | N |
| | - 10% of deformation has occurred compared to the initial dimension | | N |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|-------------------|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | Results: No fire. No explosion. | (See Table 8.3.5) | P |
| 8.3.6 | Over-charging of battery | | P |
| | Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or | | N |
| | Returned to ambient | | P |
| | Results: No fire. No explosion | (See Table 8.3.6) | P |
| 8.3.7 | Forced discharge (cells) | | P |
| | Results: No fire. No explosion | (See Table 8.3.7) | P |
| 8.3.8 | Transport tests | | N |
| | Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods | | N |
| 8.3.9 | Design evaluation – Forced internal short circuit (cells) | | N |
| | The cells complied with national requirement for : | | — |
| | The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or | | N |
| | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached | | N |
| | Results: No fire | | N |

| | | | |
|----------|--|---------------------------------------|----------|
| 9 | Information for safety | | P |
| | The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products. | Cell specifications provided. | P |
| | The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards. | Battery pack specifications provided. | P |
| | Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product | | N |
| | As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user | | N |

| | | | |
|-----------|--|-------------------------------|----------|
| 10 | Marking | | P |
| 10.1 | Cell marking | | N |
| | Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960. | The final product is battery. | N |
| 10.2 | Battery marking | | P |
| | Batteries marked in accordance with the requirements for | See marking plate on page 5. | P |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|---|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| | the cells from which they are assembled. | | |
| | Batteries marked with an appropriate caution statement. | | P |
| 10.3 | Other information | | P |
| | Storage and disposal instructions marked on or supplied with the battery. | Information for disposal instructions mentioned in manufacturer's specifications. | P |
| | Recommended charging instructions marked on or supplied with the battery. | Information for recommended charging instructions mentioned in manufacturer's specifications. | P |

| | | | |
|-----------|--|---|----------|
| 11 | Packaging | | P |
| | The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants. | Adequate package method provided to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants. | P |

| | | | |
|----------------|---|---|----------|
| Annex A | Charging range of secondary lithium ion cells for safe use | | P |
| A.1 | General | | P |
| A.2 | Safety of lithium-ion secondary battery | Complied. | P |
| A.3 | Consideration on charging voltage | Complied. | P |
| A.3.1 | General | Charging voltage is 4.2V | P |
| A.3.2 | Upper limit charging voltage | 4.25V | P |
| A.3.2.1 | General | | P |
| A.3.2.2 | Explanation of safety viewpoint | 4.25V applied. | N |
| A.3.2.3 | Safety requirements, when different upper limit charging voltage is applied | | N |
| A.4 | Consideration of temperature and charging current | | P |
| A.4.1 | General | | P |
| A.4.2 | Recommended temperature range | | P |
| A.4.2.1 | General | | P |
| A.4.2.2 | Safety consideration when a different recommended temperature range is applied | Charging temperature declared by client is: -10-50℃. | P |
| A.4.3 | High temperature range | Charging high temperature declared by client is: 55℃. | P |
| A.4.3.1 | General | | P |
| A.4.3.2 | Explanation of safety viewpoint | | P |
| A.4.3.3 | Safety considerations when specifying charging conditions in high temperature range | | P |
| A.4.3.4 | Safety consideration when specifying new upper limit in high temperature range | 55℃ applied. | P |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| IEC 62133 | | | |
|-----------|---|---|---------|
| Clause | Requirement – Test | Result – Remark | Verdict |
| A.4.4 | Low temperature range | Charging low temperature declared by client is: -10℃. | P |
| A.4.4.1 | General | | P |
| A.4.4.2 | Explanation of safety viewpoint | | P |
| A.4.4.3 | Safety considerations, when specifying charging conditions in low temperature range | | P |
| A.4.4.4 | Safety considerations when specifying a new lower limit in the low temperature range | -15℃ applied. | P |
| A.4.5 | Scope of the application of charging current | | P |
| A.5 | Sample preparation | | N |
| A.5.1 | General | | N |
| A.5.2 | Insertion procedure for nickel particle to generate internal short | | N |
| | The insertion procedure carried out at 20℃±5℃ and under -25℃ of dew point | | N |
| A.5.3 | Disassembly of charged cell | | N |
| A.5.4 | Shape of nickel particle | | N |
| A.5.5 | Insertion of nickel particle to cylindrical cell | | N |
| A.5.5.1 | Insertion of nickel particle to winding core | | N |
| A.5.5.2 | Mark the position of nickel particle on the both end of winding core of the separator | | N |
| A.5.6 | Insertion of nickel particle to prismatic cell | | N |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| Table: Critical components information | | | | P |
|--|-------------------------|----------------|--|-----------------------|
| Object/part no. | Manufacturer/ trademark | Type/model | Technical data | Mark(s) of conformity |
| PCB | Jingmeike | JZY-8437 | 20mm*3.4mm | -- |
| IC | Fujing | DW01/SOT-23-6 | Overcharge Detection Voltage:4.3V Over-discharge Detection Voltage:2.9V Discharge Current threshold:1.0A Operating temperature range: -40-85℃ | -- |
| MOSFET | Fujing | 8205 /SOT-23-6 | (VDS:20V; VGS:12V; ID(at TA=25℃):6A; IDM:20A; TJ,TSTG:-55To150℃) | -- |
| Wire | -- | 0.8*50mm | UL3302 30AWG | -- |
| Cell | FYM | 552535 | 3.7V 450mAh | -- |
| Electrolyte | Dongguan Tianfeng | TF-008B | -- | -- |
| Separator | Shenzhen Heike | 16μ*30mm | -- | -- |
| Positive electrode | FYM | 23*328mm | -- | -- |
| Negative electrode | FYM | 23*358mm | -- | -- |
| Positive electrode tab | Shanshan | Lc400 | -- | -- |
| Negative electrode tab | Fangda | AGM525 | -- | -- |
| Aluminum plastic film | Zhaohe | C4 | -- | -- |
| Supplementary information:— | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| 7.2.1 | Table: Continuous low rate charge (cells) | | | | N |
|-------------------------------|---|--|--|-----------------------------|---------|
| Sample No. | Recommended charging method, (CC, CV, or CC/CV) | Recommended charging voltage Vc, (Vdc) | Recommended charging current Irec, (A) | OCV at start of test, (Vdc) | Results |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| Supplementary information: -- | | | | | |

| | | |
|------------------------------|-----------------------------|---------|
| 7.2.2 | Table: Vibration | N |
| Sample No. | OCV at start of test, (Vdc) | Results |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| Supplementary information:-- | | |

| | | |
|------------------------------|--------------------------------------|---------|
| 7.3.1 | Table: Incorrect installation(cells) | N |
| Sample No. | OCV at start of test, (Vdc) | Results |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| Supplementary information:-- | | |

| 7.3.2 | Table: External short circuits | | | | N |
|------------|--------------------------------|-----------------------------|----------------------------|--|---------|
| Sample No. | Ambient (at 20±5°C or 55± 5°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT, (°C) | Results |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| | | | | | |
|------------------------------|----|----|----|----|----|
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- |
| Supplementary information:-- | | | | | |

| | | | |
|------------------------------|-----------------------------|---|---------|
| 7.3.6 | Table: Crush | | N |
| Sample No. | OCV at start of test, (Vdc) | OCV at removal of crushing force, (Vdc) | Results |
| -- | -- | -- | -- |
| -- | -- | -- | -- |
| -- | -- | -- | -- |
| -- | -- | -- | -- |
| -- | -- | -- | -- |
| Supplementary information:-- | | | |

| 7.3.8 | Table: Overcharge | | | N |
|------------------------------|------------------------------|-----------------------------|----------------------------|---------|
| Sample No. | OCV prior to charging, (Vdc) | Maximum charge current, (A) | Time for charging, (hours) | Results |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| Supplementary information:-- | | | | |

| 7.3.9 | Table: Forced discharge (cells) | | | N |
|------------------------------|---|---------------------------------|-------------------------------------|---------|
| Sample No. | OCV before application of reverse charge, (Vdc) | Measured reverse charge It, (A) | Time for reversed charge, (minutes) | Results |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- |
| Supplementary information:-- | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| 8.2.1 | Table: Continuous charging at constant voltage (cells) | | | P |
|---|--|--|-----------------------------|---------|
| Sample No. | Recommended charging voltage Vc, (Vdc) | Recommended charging current Irec, (A) | OCV at start of test, (Vdc) | Results |
| C1 | 4.20 | 0.09 | 4.17 | P |
| C2 | 4.20 | 0.09 | 4.17 | P |
| C3 | 4.20 | 0.09 | 4.17 | P |
| C4 | 4.20 | 0.09 | 4.17 | P |
| C5 | 4.20 | 0.09 | 4.17 | P |
| Supplementary information: No fire or explosion, No leakage | | | | |

| 8.3.1 | Table: External short circuit (cells) | | | | P |
|---|---------------------------------------|-----------------------------|----------------------------|---|---------|
| Sample No. | Ambient (°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT , (°C) | Results |
| Samples charged at charging temperature upper limit 55°C | | | | | |
| C6 | 24.4 | 4.22 | 0.07 | 81.3 | P |
| C7 | 24.2 | 4.21 | 0.07 | 77.5 | P |
| C8 | 24.6 | 4.22 | 0.07 | 84.5 | P |
| C9 | 24.5 | 4.22 | 0.07 | 86.2 | P |
| C10 | 24.7 | 4.21 | 0.07 | 83.1 | P |
| Samples charged at charging temperature lower limit -15°C | | | | | |
| C11 | 24.3 | 4.17 | 0.07 | 75.2 | P |
| C12 | 24.5 | 4.16 | 0.07 | 81.9 | P |
| C13 | 24.6 | 4.17 | 0.07 | 77.3 | P |
| C14 | 24.7 | 4.17 | 0.07 | 82.6 | P |
| C15 | 24.5 | 4.16 | 0.07 | 80.2 | P |
| Supplementary information: No fire, no explosion | | | | | |

| 8.3.2 | Table: External short circuit (battery) | | | | P |
|--|---|-----------------------------|----------------------------|---|---------|
| Sample No. | Ambient (°C) | OCV at start of test, (Vdc) | Resistance of circuit, (Ω) | Maximum case temperature rise ΔT , (°C) | Results |
| Samples charged at charging temperature upper limit 55°C | | | | | |
| B1 | 55.4 | 4.22 | 0.07 | 0.8 | P |
| B2 | 55.7 | 4.21 | 0.07 | 0.4 | P |
| B3 | 55.5 | 4.22 | 0.07 | 0.5 | P |
| B4 | 55.6 | 4.22 | 0.07 | 0.6 | P |
| B5 | 55.8 | 4.21 | 0.07 | 0.5 | P |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| | | | | | |
|--|------|------|------|-----|---|
| Samples charged at charging temperature lower limit -15℃ | | | | | |
| B6 | 55.4 | 4.17 | 0.07 | 0.3 | P |
| B7 | 55.2 | 4.17 | 0.07 | 0.7 | P |
| B8 | 55.7 | 4.16 | 0.07 | 0.4 | P |
| B9 | 55.6 | 4.17 | 0.07 | 0.9 | P |
| B10 | 55.5 | 4.16 | 0.07 | 0.7 | P |
| Supplementary information: No fire, no explosion | | | | | |

| 8.3.5 | Table: Crush(cells) | | | | P |
|---|-----------------------------|---|--|--------------------------------------|---------|
| Sample No. | OCV at start of test, (Vdc) | OCV at removal of crushing force, (Vdc) | Width/ diameter of cell before crush, (mm) | Required deformation for crush, (mm) | Results |
| Samples charged at charging temperature upper limit 55℃ | | | | | |
| C16 | 4.22 | 4.21 | -- | -- | P |
| C17 | 4.21 | 4.21 | -- | -- | P |
| C18 | 4.22 | 4.22 | -- | -- | P |
| C19 | 4.22 | 4.22 | -- | -- | P |
| C20 | 4.21 | 4.20 | -- | -- | P |
| Samples charged at charging temperature lower limit -15℃ | | | | | |
| C21 | 4.17 | 4.17 | -- | -- | P |
| C22 | 4.16 | 4.15 | -- | -- | P |
| C23 | 4.16 | 4.16 | -- | -- | P |
| C24 | 4.17 | 4.16 | -- | -- | P |
| C25 | 4.17 | 4.17 | -- | -- | P |
| Supplementary information: A 13kN force applied at the wide side of prismatic cells. No voltage abrupt drop occurred. No fire, no explosion | | | | | |

| 8.3.6 | Table: Over-charging of battery | | | P |
|--|---------------------------------|----------------------------|---------------------------------------|---------|
| Constant charging current (A).....: | | 0.9A | | -- |
| Supply voltage (Vdc).....: | | 5V | | -- |
| Sample No. | OCV before charging, (Vdc) | Resistance of circuit, (Ω) | Maximum outer casing temperature, (℃) | Results |
| B11 | 3.34 | 0.32 | 24.9 | P |
| B12 | 3.35 | 0.32 | 24.7 | P |
| B13 | 3.35 | 0.32 | 24.8 | P |
| B14 | 3.34 | 0.32 | 24.7 | P |
| B15 | 3.34 | 0.32 | 24.6 | P |
| Supplementary information: No fire, no explosion | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

| 8.3.7 | Table: Forced discharge (cells) | | | P |
|---|---|---------------------------------|-------------------------------------|---------|
| Sample No. | OCV before application of reverse charge, (Vdc) | Measured Reverse charge It, (A) | Time for reversed charge, (minutes) | Results |
| C26 | 3.33 | 0.45 | 90 | P |
| C27 | 3.32 | 0.45 | 90 | P |
| C28 | 3.34 | 0.45 | 90 | P |
| C29 | 3.33 | 0.45 | 90 | P |
| C30 | 3.33 | 0.45 | 90 | P |
| Supplementary information: No fire , no explosion | | | | |

| 8.3.9 | Table: Forced internal short circuit (cells) | | | | | N |
|-------------------------------|--|-----------------------------|---------------------------------|-------------------------------|--------------------|---------|
| Sample No. | Chamber ambient (°C) | OCV at start of test, (Vdc) | Particle location ¹⁾ | Maximum applied pressure, (N) | Voltage drop, (mV) | Results |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- |
| Supplementary information: -- | | | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>



Attachment A Photos of product

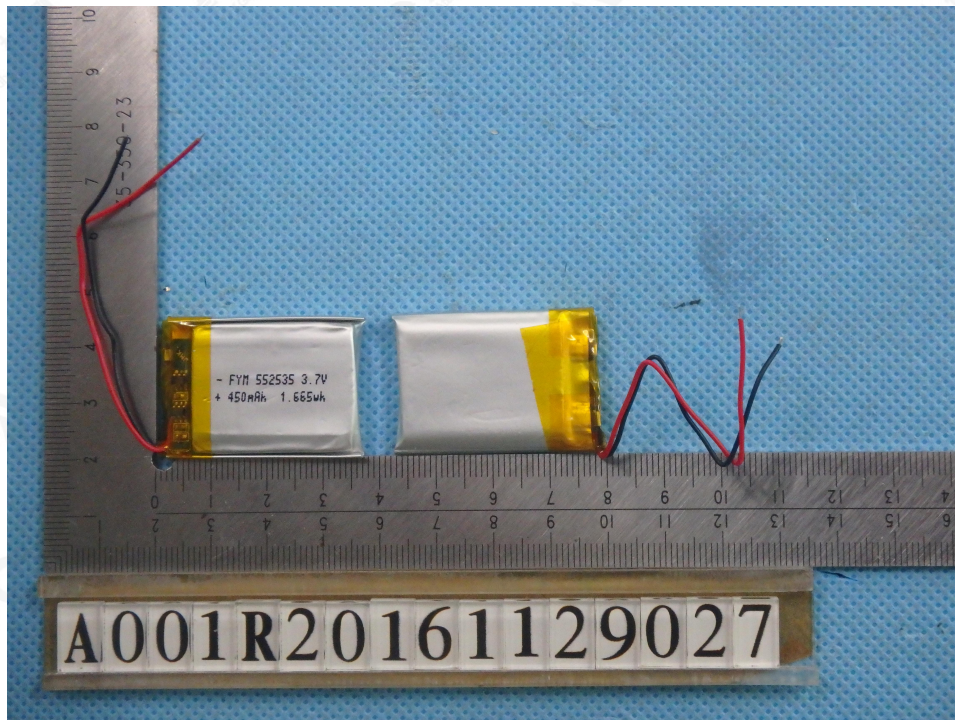


Fig. 1 – View of battery

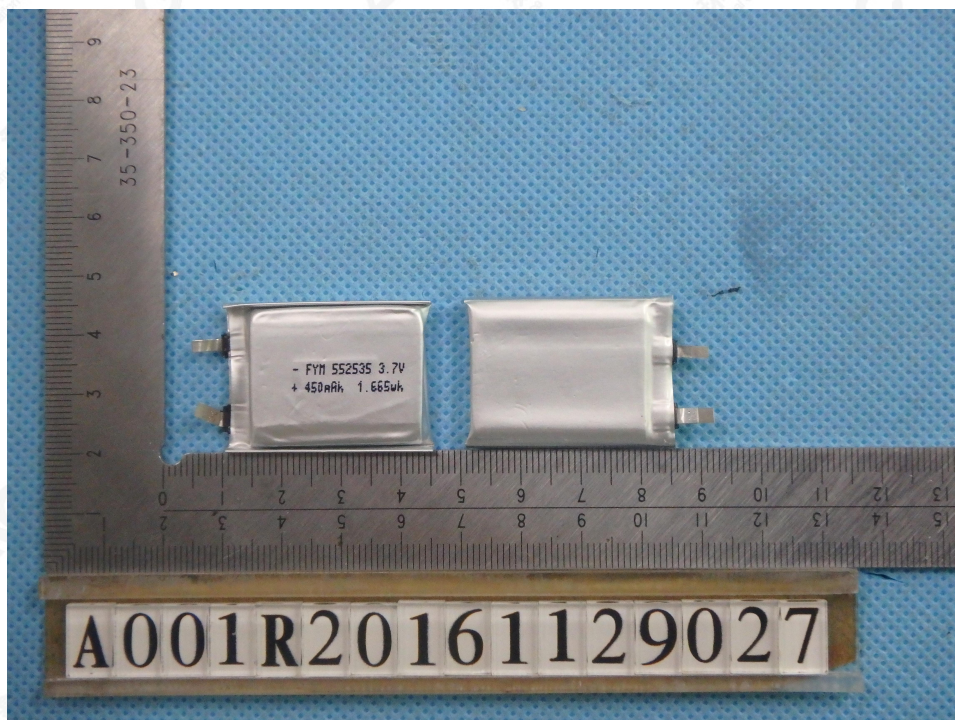


Fig. 2 – View of cell

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>

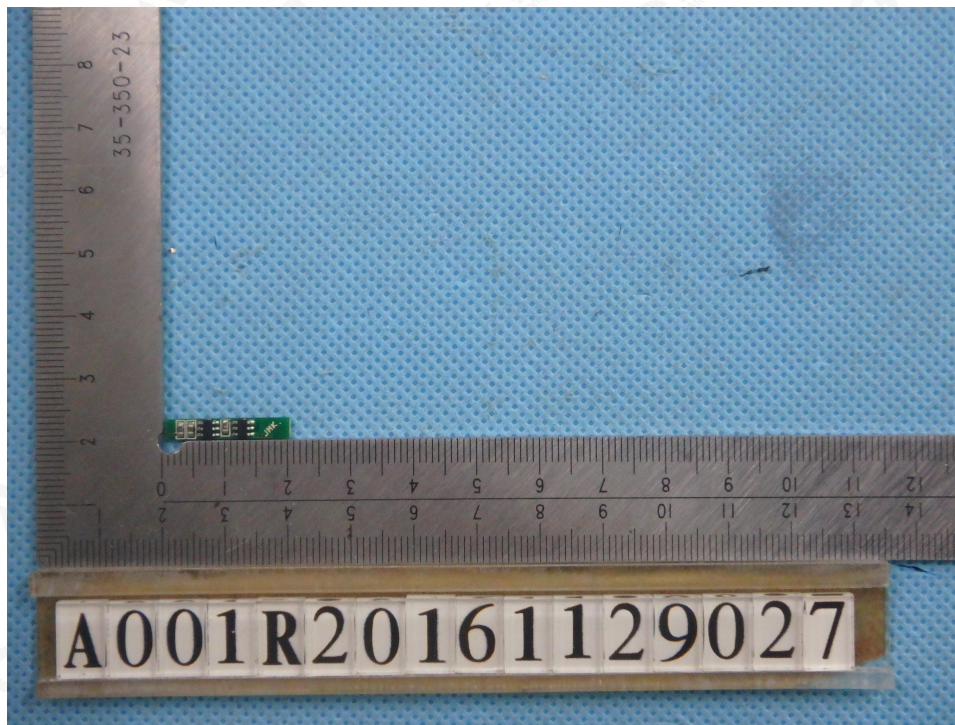


Fig. 3 — View of PCB



Fig. 4 — View of PCB

----END OF REPORT----

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC; this document cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessable and confirmed at <http://www.agc-cert.com>