

EMC Test Report

Report No.: AGC10385170704EE01

PRODUCT DESIGNATION : Pivot USB with type C
BRAND NAME : XDCOLLECTION
MODEL NAME : P300.12, P300.11
CLIENT : Xindao B.V.
DATE OF ISSUE : Jul.18, 2017
STANDARD(S) : EN 55032:2015/AC:2016
EN 55024:2010/A1:2015
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul.18, 2017	Valid	Original Report

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. SYSTEM DESCRIPTION.....	6
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION	7
5. SUPPORT EQUIPMENT	8
6. TEST FACILITY	9
7. TEST ITEMS AND THE RESULTS	11
8. EN 55032 LINE CONDUCTED EMISSION TEST.....	12
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	12
8.2. BLOCK DIAGRAM OF TEST SETUP.....	12
8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	13
8.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	14
9. EN 55032 RADIATED EMISSION TEST	16
9.1. LIMITS OF RADIATED DISTURBANCES.....	16
9.2. BLOCK DIAGRAM OF TEST SETUP.....	16
9.3. PROCEDURE OF RADIATED EMISSION TEST.....	17
9.4. TEST RESULT OF RADIATED EMISSION TEST	18
10. EN 61000-4-2 ESD IMMUNITY TEST	20
10.1. BLOCK DIAGRAM OF TEST SETUP	20
10.2. TEST PROCEDURE	21
10.3. PERFORMANCE & RESULT	22
11. EN 61000-4-3 RS IMMUNITY TEST	23
11.1. BLOCK DIAGRAM OF TEST SETUP	23
11.2. TEST PROCEDURE	24
11.3. PERFORMANCE & RESULT	24
12. EN 61000-4-4 EFT IMMUNITY TEST.....	25
12.1. BLOCK DIAGRAM OF TEST SETUP	25
12.2. TEST PROCEDURE	26
12.3. PERFORMANCE & RESULT	26
13. EN 61000-4-5 SURGE IMMUNITY TEST.....	27
13.1. BLOCK DIAGRAM OF TEST SETUP	27
13.2. TEST PROCEDURE	28
13.3. PERFORMANCE & RESULT	28

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

14. EN 61000-4-6 CS IMMUNITY TEST	29
14.1. BLOCK DIAGRAM OF TEST SETUP	29
14.2. TEST PROCEDURE	30
14.3. PERFORMANCE & RESULT	30
15. EN 61000-4-11 DIPS IMMUNITY TEST	31
15.1. BLOCK DIAGRAM OF TEST SETUP	31
15.2. TEST PROCEDURE	32
15.3. INTERPRETATION	32
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	33
APPENDIX B: PHOTOGRAPHS OF EUT	36

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


1. VERIFICATION OF CONFORMITY

Manufacturer	Xindao B.V.
Address	P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Factory	Xindao B.V.
Address	P.O. Box 3082, 2280 GB, Rijswijk, The Netherlands
Product Designation	Pivot USB with type C
Remark	The highest frequency of the internal sources of the EUT is less than 108 MHz, The measurement shall only be made up to 1 GHz
Brand Name	XDCOLLECTION
Test Model	P300.12
Series Model	P300.11
Difference description	All the same except for the model name and appearance.
Date of test	Jul.13, 2017 to Jul.17, 2017
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-EC-IT/AC(2013-03-01)

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By

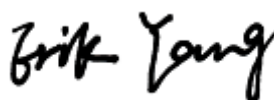

Erik Yang(Yang Jianmin)

Jul.18, 2017

Reviewed By



Stone Zhou(Zhou Dong)

Jul.18, 2017

Approved By



 Forrest Lei(Lei Yonggang)
 Authorized Officer

Jul.18, 2017

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2. SYSTEM DESCRIPTION

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	Connected to pc, Data Exchange	V
Note: 1. V means EMI worst mode.		

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by ISO.

- Uncertainty of Conducted Emission, $U_c = \pm 2.75\text{dB}$
- Uncertainty of Radiated Emission, $U_c = \pm 3.2\text{dB}$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4. PRODUCT INFORMATION

Housing Type	Plastic and metal
EUT Input Rating	DC 5V by PC

I/O Port Information (☒ Applicable ☐ Not Applicable)

I/O Port of EUT			
I/O Port Type	Number	Cable Description	Tested With
USB	1	--	1
Type-C	1	--	1

Note:

1. All the above "--" means that EUT has no cable.
2. All the cables were provided by AGC Lab.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
PC	Apple Inc.	A1534	C02QJ21TGF84	--	0.8m Unshielded
Mouse	DELL	PE11032EC	--	--	1.2m Unshielded

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	B112-B113, Building 12, Baoan Building Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen, Guangdong, P.R.China

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	2017.06.20	2018.06.19
LISN	R&S	ESH2-Z5	100086	2016.08.25	2017.08.24

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	2017.06.20	2018.06.19
ANTENNA	SCHWARZBECK	VULB9168	D69250	2016.03.01	2018.02.28

SURGE/EFT/DIPS

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
EFT、Surge Generator	Schaffner	Modula 6150	34437	2016.08.25	2017.08.24

TEST EQUIPMENT OF ESD TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
ESD Simulator	Schaffner	NSG 438	782	2016.10.10	2017.10.09

TEST EQUIPMENT OF RS IMMUNITY TEST

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
SIGNAL GENERATOR	R&S	E4421B	MY43351603	2017.05.31	2018.05.30
ANTENNA	SCHWARZBECK	VULB9168	D69250	2016.03.01	2018.02.28
POWER SENSOR	R&S	URV5-Z4	100124	2017.05.31	2018.05.30
POWER METER	R&S	NRVD	8323781027	2017.06.20	2018.06.19
POWER AMPLIFIER	KALMUS	7100LC	04-02/17-06-001	2017.06.20	2018.06.19
RF AMPLIFIER	Milmega	AS0104-55_55	1004793	2017.06.20	2018.06.19
HORN ANTENNA	ETS LINDGREN	3117	00034609	2016.03.01	2018.02.28

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST EQUIPMENT OF CS IMMUNITY TEST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Amplifier	AR	75A250A	18464	2017.06.20	2018.06.19
CDN	Schaffner	M016	21614	2016.08.25	2017.08.24
6dB attenuator	JWF	50FHC-00 6-50	N/A	2017.06.20	2018.06.19
Electromagnetic Injection Clamp	Luthi	EM101	35773	2016.08.25	2017.08.24
Power Sensor	R&S	URV5-Z4	100124	2017.05.31	2018.05.30
Power Meter	R&S	NRVD	832378/027	2017.06.20	2018.06.19
Signal Generator	R&S	E4421B	MY43351603	2017.05.31	2018.05.30

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7. TEST ITEMS AND THE RESULTS

Test item	Test Requirement	Test Method	Class/Severity	Result
CONDUCTED EMISSION	EN 55032	EN 55032	Class B	Pass
RADIATED EMISSION	EN 55032	EN 55032	Class B	Pass
Harmonic current emission	EN 61000-3-2	EN 61000-3-2	Class D	N/A
Voltage fluctuations & flicker	EN 61000-3-3	EN 61000-3-3	§5 of EN 61000-3-3	N/A
Electrostatic Discharge Immunity	EN 55024	EN 61000-4-2	± 8.0 kV (Air Discharge) ± 4.0 kV (Contact Discharge) ± 4.0 kV (Indirect Discharge)	Pass
Radiated RF Electromagnetic	EN 55024	EN 61000-4-3	3V/m with 80% AM. 1kHz Modulation.	Pass
Electrical fast transient/burst Immunity	EN 55024	EN 61000-4-4	+/- 1kV for Power Supply Lines	Pass
SURGE IMMUNITY	EN 55024	EN 61000-4-5	+/- 1kV (Line to Line) +/- 2kV (Line to Ground)	Pass
Immunity to Conducted Disturbances Induced by RF fields	EN 55024	EN 61000-4-6	3V with 80% AM. 1 kHz Modulation	Pass
Voltage dips and short interruptions immunity	EN 55024	EN 61000-4-11	0 degrees	Pass

Note : N/A means not applicable.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

8. EN 55032 LINE CONDUCTED EMISSION TEST


8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

8.2. BLOCK DIAGRAM OF TEST SETUP

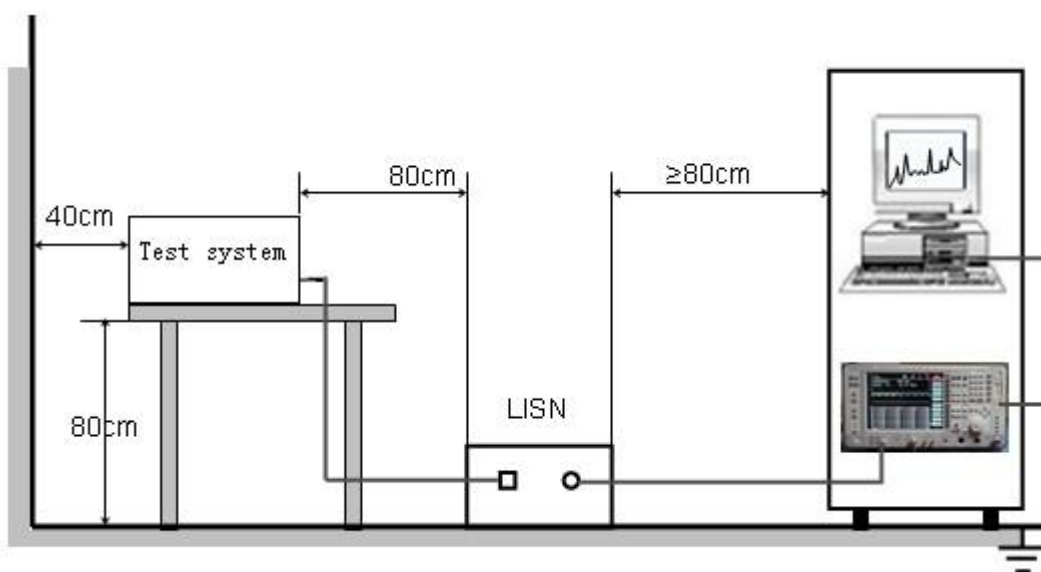

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per EN55032.
- (3) All I/O cables were positioned to simulate typical actual usage as per EN55032.
- (4) The EUT was connected to pc to take data exchange which received 230V/60Hz power from a LISN.
- (5) All support equipments received power from a second LISN supplying power of AC 230V/50Hz, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- (8) During the above scans, the emissions were maximized by cable manipulation.
- (9) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (10) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

8.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

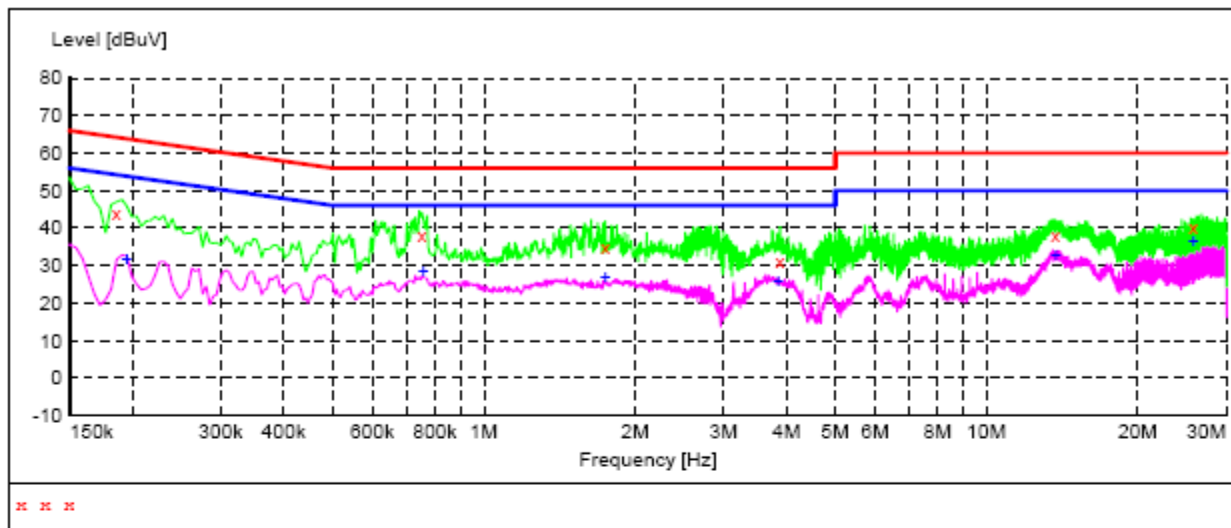

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.186000	44.00	10.3	64	20.2	QP	L1
0.753000	38.30	10.3	56	17.7	QP	L1
1.743000	34.60	10.4	56	21.4	QP	L1
3.880500	31.10	10.5	56	24.9	QP	L1
13.708500	38.20	11.0	60	21.8	QP	L1
25.782000	40.00	11.9	60	20.0	QP	L1


MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.195000	31.40	10.3	54	22.4	AV	L1
0.757500	28.30	10.3	46	17.7	AV	L1
1.743000	26.70	10.4	46	19.3	AV	L1
3.853500	25.50	10.5	46	20.5	AV	L1
13.708500	32.90	11.0	50	17.1	AV	L1
25.782000	36.40	11.9	50	13.6	AV	L1

RESULT: PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

LINE CONDUCTED EMISSION TEST-N

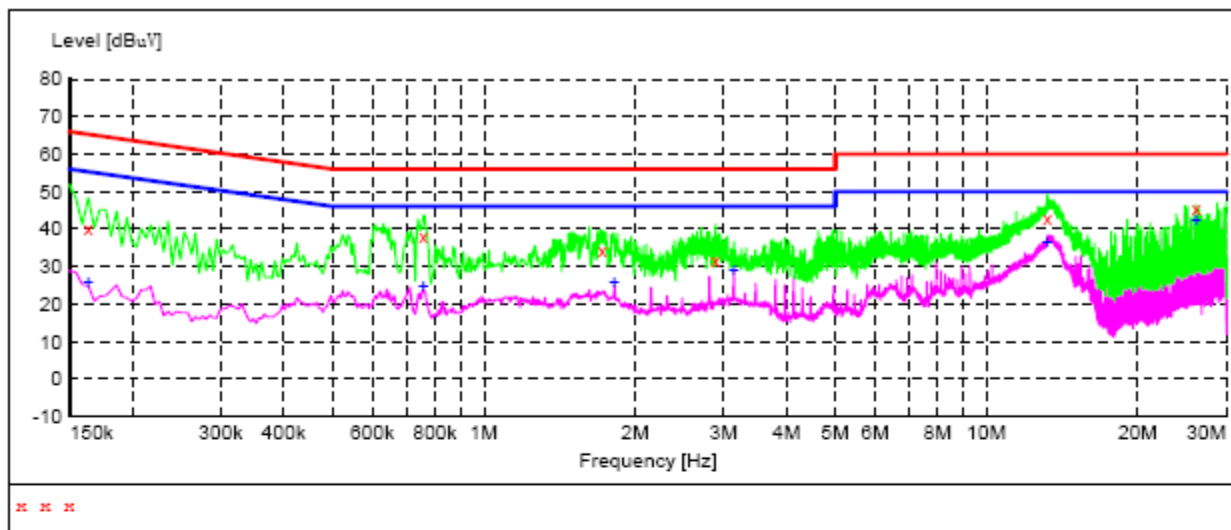

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.163500	40.10	10.3	65	25.2	QP	N
0.757500	38.10	10.3	56	17.9	QP	N
1.720500	34.20	10.4	56	21.8	QP	N
2.890500	31.80	10.5	56	24.2	QP	N
13.209000	42.80	11.0	60	17.2	QP	N
26.128500	45.30	11.9	60	14.7	QP	N

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.163500	25.90	10.3	55	29.4	AV	N
0.757500	24.60	10.3	46	21.4	AV	N
1.819500	25.70	10.4	46	20.3	AV	N
3.142500	29.20	10.5	46	16.8	AV	N
13.209000	36.40	11.0	50	13.6	AV	N
26.128500	42.10	11.9	50	7.9	AV	N

RESULT: PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9. EN 55032 RADIATED EMISSION TEST

9.1. LIMITS OF RADIATED DISTURBANCES

AT 10M DISTANCES

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m Q.P.)
30-230	10	30.00
230-1000	10	37.00


AT 3M DISTANCES

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m Q.P.)
30-230	3	40.00
230-1000	3	47.00

Note: The lower limit shall apply at the transition frequency.

9.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

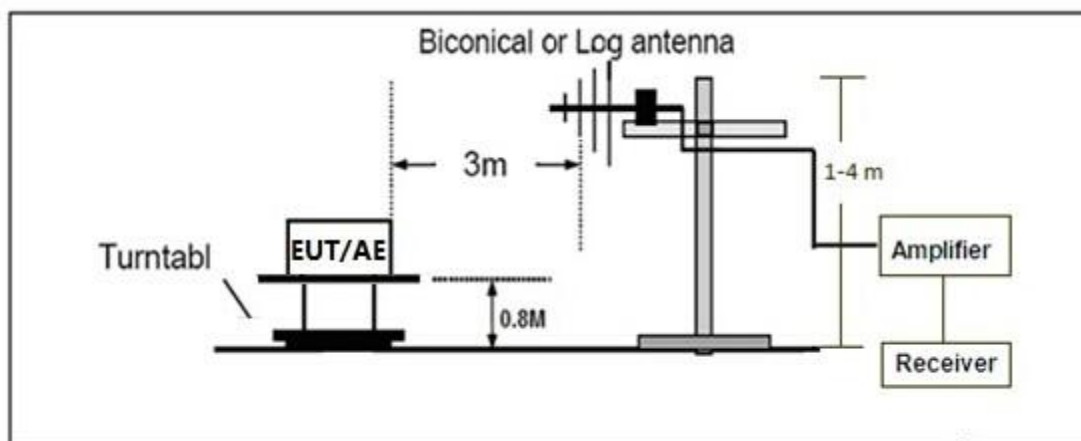

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


9.3. PROCEDURE OF RADIATED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per EN 55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per EN 55032.
- (3) All I/O cables were positioned to simulate typical actual usage as per EN 55032.
- (4) The EUT was connected to pc for data exchange which through the outlet socket under the turntable. All support equipments received AC230V/50Hz power from socket under the turntable, if any.
- (5) The antenna was placed at 3 meter away from the EUT as stated in EN 55032. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) The test mode(s) were scanned during the test:
- (8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal

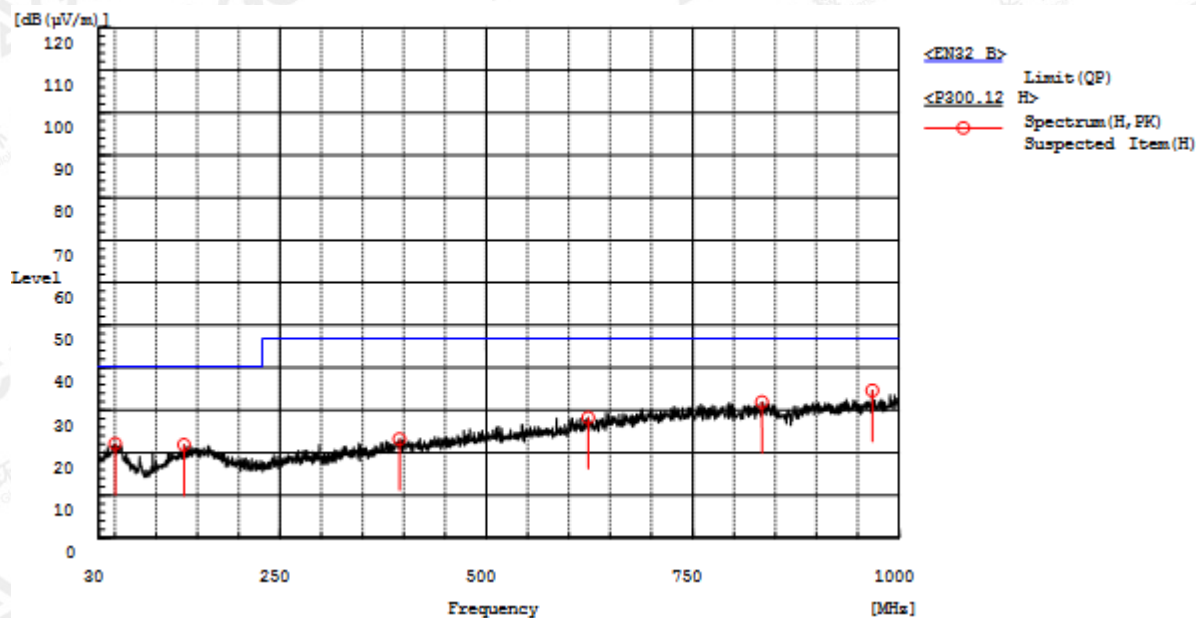


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
50.370	H	5.5	16.6	22.1	40.0	17.9	Pass	100.0	90.9
133.790	H	5.8	16.1	21.9	40.0	18.1	Pass	150.0	145.9
967.990	H	6.5	28.1	34.6	47.0	12.4	Pass	200.0	181.3
394.720	H	4.2	19.0	23.2	47.0	23.8	Pass	200.0	289.0
623.640	H	5.0	23.2	28.2	47.0	18.8	Pass	200.0	181.3
834.130	H	4.7	27.2	31.9	47.0	15.1	Pass	150.0	327.7

RESULT: PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Radiated Emission Test at 3m Distance-Vertical

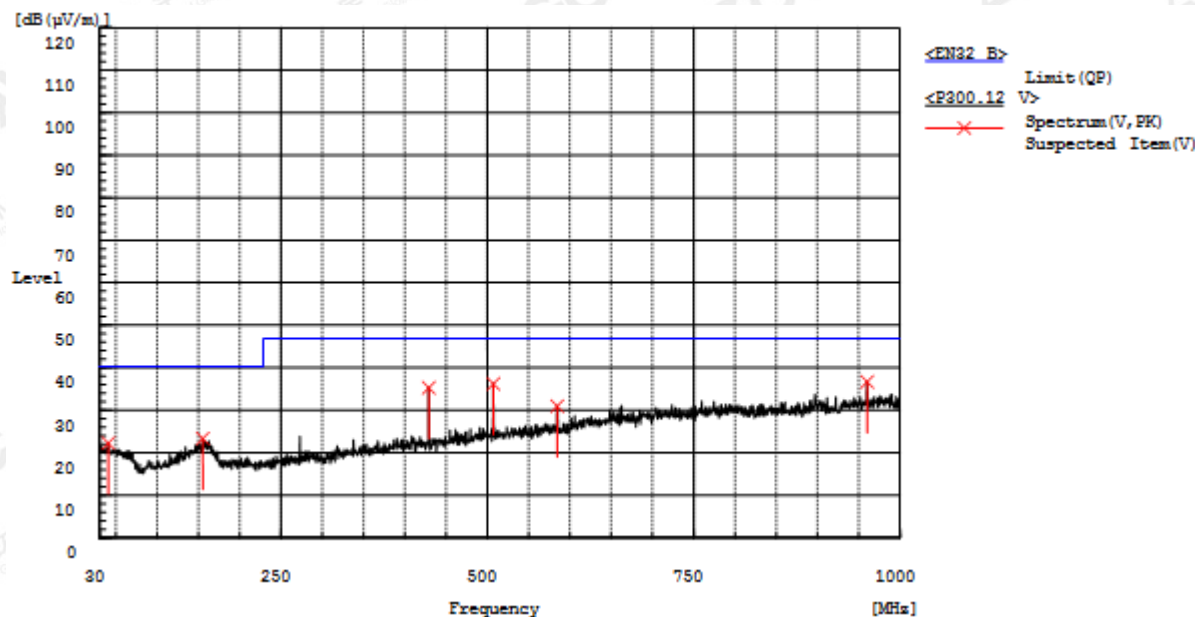

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
40.670	V	5.7	16.6	22.3	40.0	17.7	Pass	150.0	219.7
155.130	V	5.2	18.2	23.4	40.0	16.6	Pass	100.0	217.2
429.155	V	16.2	19.1	35.3	47.0	11.7	Pass	200.0	269.4
507.240	V	15.2	21.0	36.2	47.0	10.8	Pass	200.0	269.4
584.840	V	8.2	22.8	31.0	47.0	16.0	Pass	200.0	269.4
960.230	V	8.3	28.4	36.7	47.0	10.3	Pass	200.0	271.1

RESULT: PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


10. EN 61000-4-2 ESD IMMUNITY TEST

ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST

Port	Enclosure
Basic Standard	EN 61000-4-2
Test Level	± 8.0 kV (Air Discharge) ± 4.0 kV (Contact Discharge) ± 4.0 kV (Indirect Discharge)
Standard require	B
Tester	Erik
Temperature	20°C
Humidity	50%

10.1. BLOCK DIAGRAM OF TEST SETUP

(The 470 k ohm resistors are installed per standard requirement)

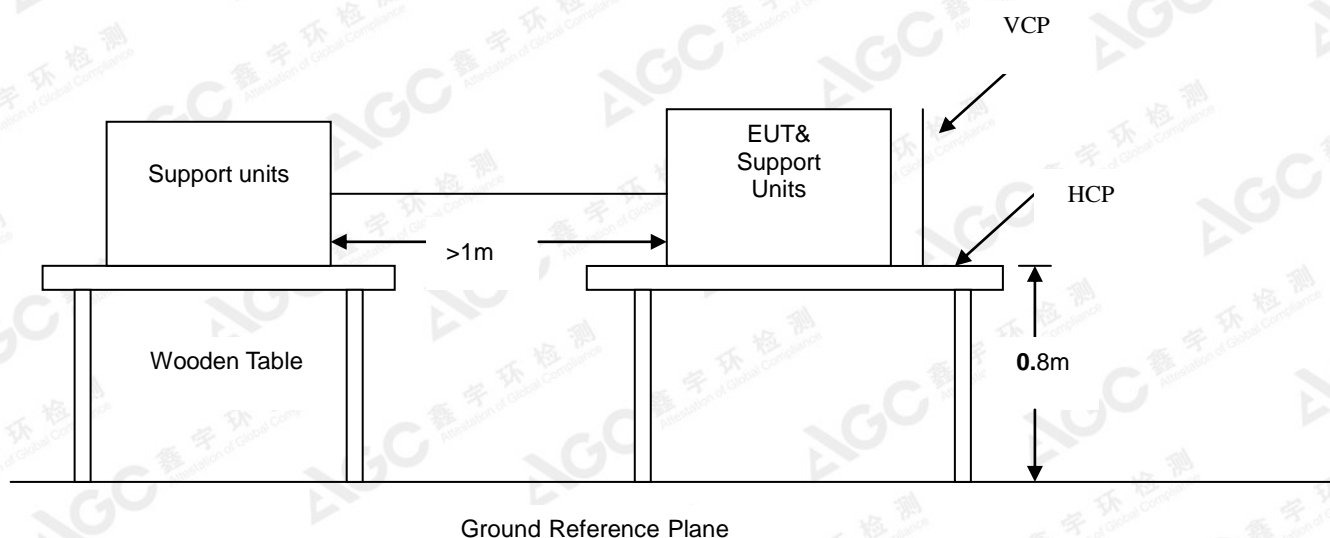

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10.2. TEST PROCEDURE

The EUT was located 0.1 m minimum from all side of the HCP.

The support units were located 1 m minimum away from the EUT.

EUT worked with resistance load, and make sure EUT worked normally.

Active the communication function if the EUT with such port(s).

As per the requirement of EN 55024; applying direct contact discharge at the sides other than front of EUT at minimum 50 discharges (25 positive and 25 negative) if applicable, can't be applied direct contact discharge side of EUT then the indirect discharge shall be applied. One of the test points shall be subjected to at least 50 indirect discharge (contact) to the front edge of horizontal coupling plane.

Other parts of EUT where it is not possible to perform contact discharge then selecting appropriate points of EUT for air discharge, a minimum of 10 single air discharges shall be applied.

The application of ESD to the contact of open connectors is not required.

Note: As per the A2 to EN 61000-4-2, a bleed resistor cable is connected between the EUT and HCP during the test.

The electrostatic discharges were applied as follows:

Voltage	Coupling	Test Performance	Result
±4kV	Contact Discharge	No function loss	A
±4kV	Indirect Discharge HCP (Front)	No function loss	A
±4kV	Indirect Discharge HCP (Left)	No function loss	A
±4kV	Indirect Discharge HCP (Back)	No function loss	A
±4kV	Indirect Discharge HCP (Right)	No function loss	A
±4kV	Indirect Discharge VCP (Front)	No function loss	A
±4kV	Indirect Discharge VCP (Left)	No function loss	A
±4kV	Indirect Discharge VCP (Back)	No function loss	A
±4kV	Indirect Discharge VCP (Right)	No function loss	A
±8kV	Air Discharge	No function loss	A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10.3. PERFORMANCE & RESULT

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

☒ **PASS** ☐ **FAIL**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

11. EN 61000-4-3 RS IMMUNITY TEST

RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST

Port	Enclosure
Basic Standard	EN 61000-4-3
Test Level:	3V/m with 80% AM. 1kHz Modulation.
Standard require	A
Tester	Erik
Temperature	25°C
Humidity	55%

11.1. BLOCK DIAGRAM OF TEST SETUP

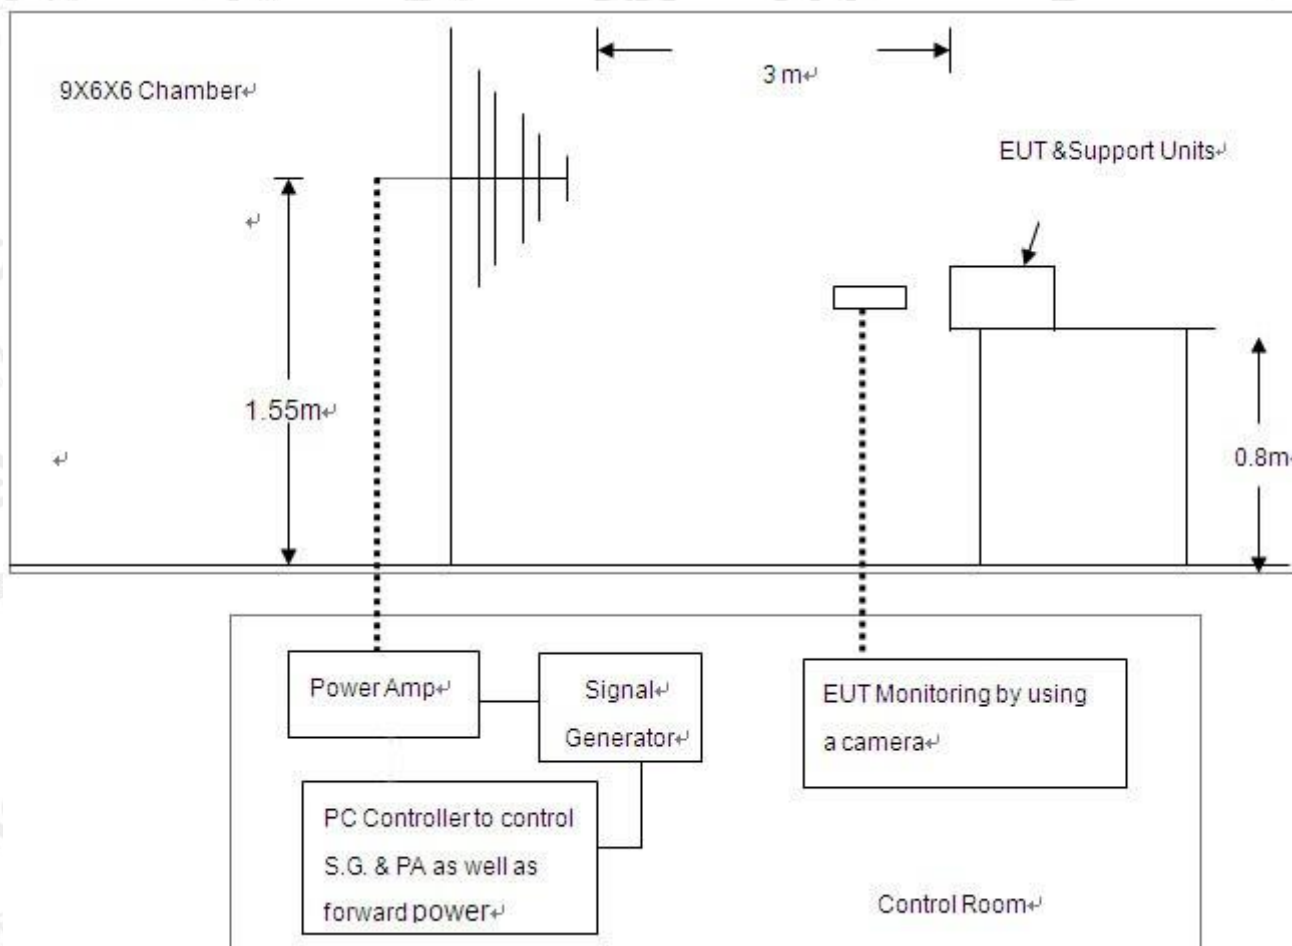

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

11.2. TEST PROCEDURE

The EUT was located at the edge of supporting table keep 3 meter away from transmitting antenna, it just the calibrated square area of field uniformity. The support units were located outside of the uniformity area, but the cable(s) connected with EUT were exposed to the calibrated field as per EN 61000-4-3.

EUT worked with resistance load, and make sure EUT worked normally.

Setting the testing parameters of RS test software per EN 61000-4-3.

Performing the test at each side of with specified level (3V/m) at 1% steps and test frequency from 80MHz to 1000MHz

Recording the test result in following table.

EN 61000-4-3 Final test conditions:

Test level: 3V/m

Steps: 1 % of fundamental

Dwell Time: 1 sec

Range (MHz)	Field	Modulation	Polarity	Position	Test Performance	Result
80-1000	3V/m	AM	H	Front	No function loss	A
80-1000	3V/m	AM	H	Left	No function loss	A
80-1000	3V/m	AM	H	Back	No function loss	A
80-1000	3V/m	AM	H	Right	No function loss	A
80-1000	3V/m	AM	V	Front	No function loss	A
80-1000	3V/m	AM	V	Left	No function loss	A
80-1000	3V/m	AM	V	Back	No function loss	A
80-1000	3V/m	AM	V	Right	No function loss	A

11.3. PERFORMANCE & RESULT

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

☒ **PASS**
☐ **FAIL**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

12. EN 61000-4-4 EFT IMMUNITY TEST

ELECTRICAL FAST TRANSIENTS/BURST IMMUNITY TEST

Port	On Power Supply Lines
Basic Standard	EN 61000-4-4
Test Level	+/- 1kV for Power Supply Lines
Standard require	B
Tester	Erik
Temperature	25°C
Humidity	55%

12.1. BLOCK DIAGRAM OF TEST SETUP

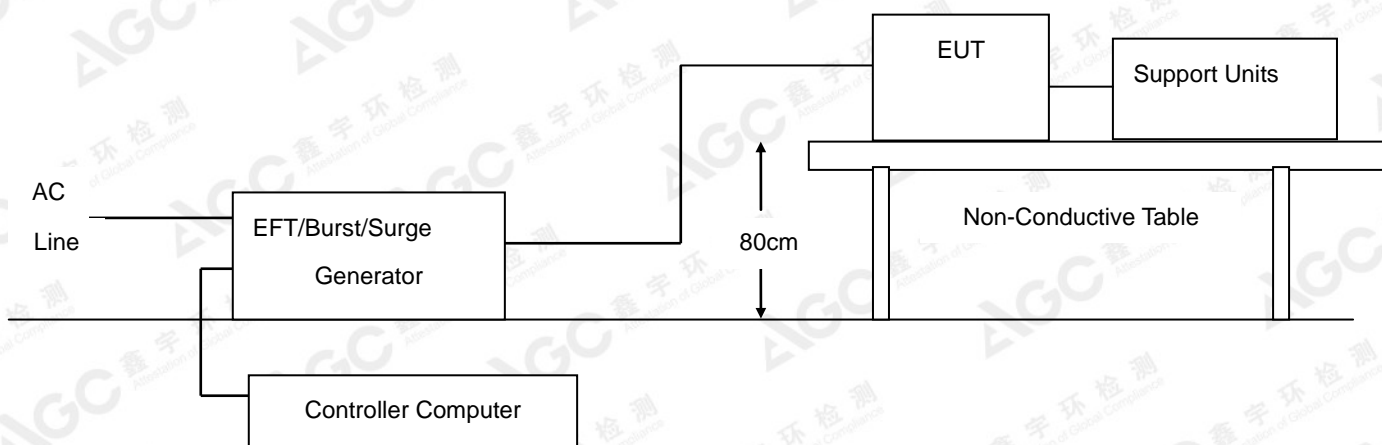

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

12.2. TEST PROCEDURE

The EUT and support units were located on a wooden table 0.8m away from ground reference plane.
 A 1.0 meter long power cord was attached to EUT during the test.
 The length of communication cable between communication port and clamp was keeping within 1 meter.
 EUT worked with resistance load, and make sure EUT worked normally.
 Related peripherals work during the test.
 Recording the test result as shown in following table.

Test conditions:

Impulse Frequency: 5 kHz
 Tr/Th: 5/50ns
 Burst Duration: 15ms
 Burst Period: 300ms

Inject Line	Voltage kV	Inject Method	Test Performance	Result
L+N	+/- 1	Direct	No function loss	A

12.3. PERFORMANCE & RESULT

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
--


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13. EN 61000-4-5 SURGE IMMUNITY TEST

SURGE IMMUNITY TEST

Port	On Power Supply Lines
Basic Standard	EN 61000-4-5
Requirements	+/- 1kV (Line to Line)
Standard require	B
Tester	Erik
Temperature	25°C
Humidity	55%

13.1. BLOCK DIAGRAM OF TEST SETUP

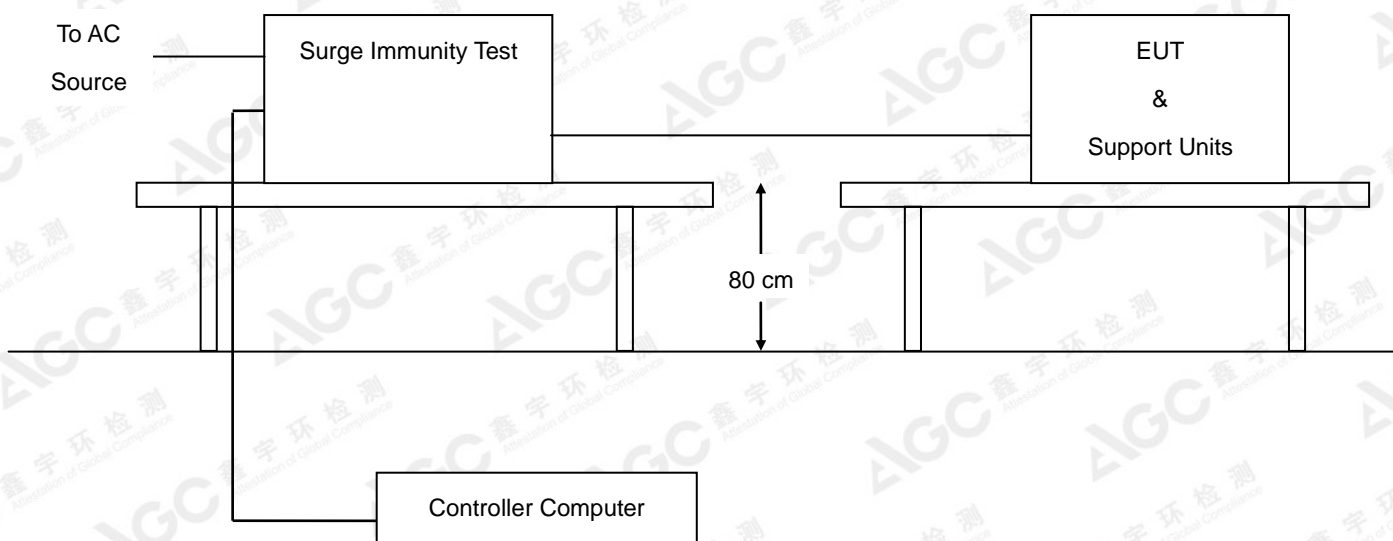

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

13.2. TEST PROCEDURE

The EUT and support units were located on a wooden table 0.8 m away from ground floor.

EUT worked with resistance load, and make sure EUT worked normally.

Recording the test result as shown in following table.

Test conditions:

Voltage Waveform	1.2/50 μ s
Current Waveform	8/20 μ s
Polarity	Positive/Negative
Phase angle	0°, 180°, 90°, 270°
Number of Test	5

Coupling Line	Voltage (kV)	Polarity	Coupling Method	Test Performance	Result
L1-N	1	Positive	Capacitive	No function loss	A
L1-N	1	Negative	Capacitive	No function loss	A

13.3. PERFORMANCE & RESULT

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.


<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
--

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

14. EN 61000-4-6 CS IMMUNITY TEST

Port	On Power Supply Lines
Basic Standard	EN 61000-4-6
Requirements	3V with 80% AM. 1 kHz Modulation
Standard require	A
Tester	Erik
Temperature	25°C
Humidity	55%

14.1. BLOCK DIAGRAM OF TEST SETUP

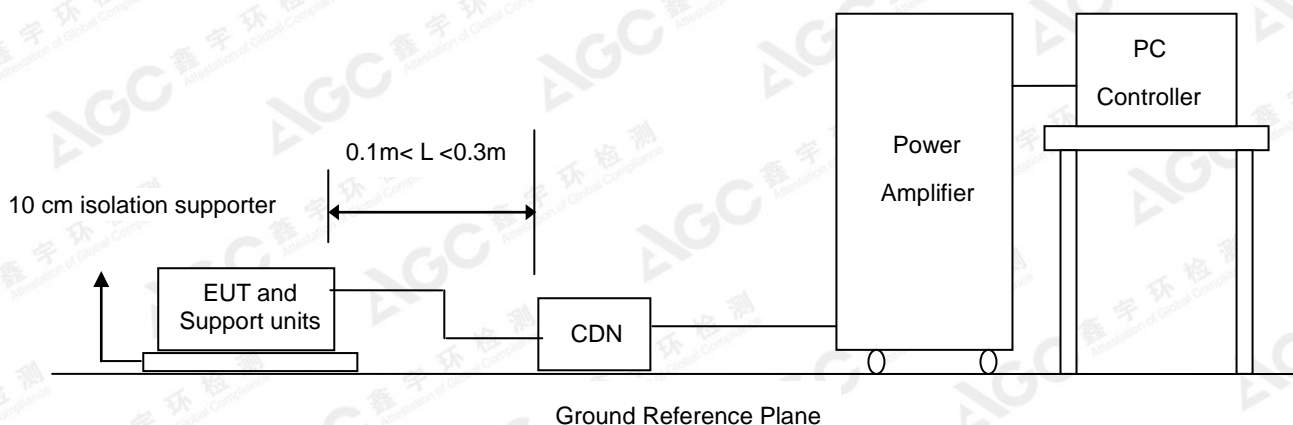

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

14.2. TEST PROCEDURE

The EUT and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.

EUT worked with resistance load, and make sure EUT worked normally.

Related peripherals work during the test.

Setting the testing parameters of CS test software per EN 61000-4-6.

Recording the test result in following table.

Test conditions:

Frequency Range	0.15MHz-80MHz
Frequency Step	1% of fundamental
Dwell Time	1 sec

Range (MHz)	Strength	Modulation	Result
0.15-80	3V	AM	A

14.3. PERFORMANCE & RESULT

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

☒ **PASS**
☐ **FAIL**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

15. EN 61000-4-11 DIPS IMMUNITY TEST


VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST

Port	On Power Supply Lines
Basic Standard	EN 61000-4-11
Requirements	0 degrees
Test Interval	Min. 10 sec.
Tester	Erik
Temperature	25°C
Humidity	55%

Voltage Dips	Test Level % U _T	Reduction (%)	Duration (periods)	Performance Criteria
	<5	>95	0.5	B
	70	30	25	C

Voltage Interruptions	Test Level % U _T	Reduction (%)	Duration (periods)	Performance Criteria
	<5	>95	250	C

15.1. BLOCK DIAGRAM OF TEST SETUP

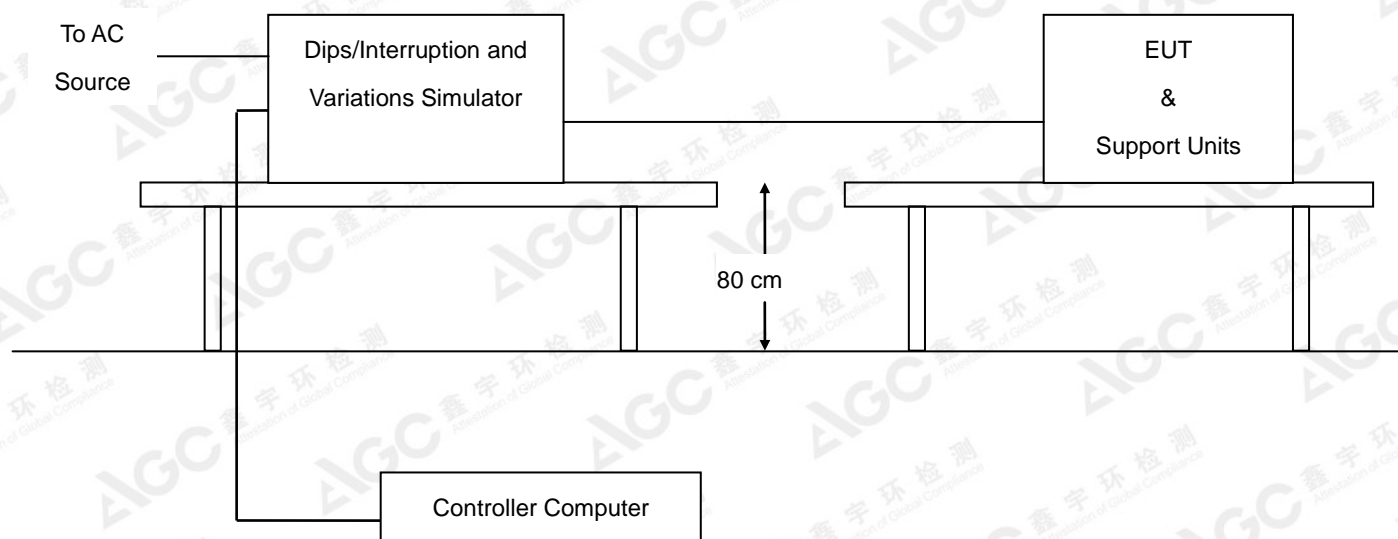

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

15.2. TEST PROCEDURE

The EUT and support units were located on a wooden table, 0.8 m away from ground floor.

EUT worked with resistance load, and make sure EUT worked normally.

Setting the parameter of tests and then perform the test software of test simulator.

Conditions changes to occur at 0 degree crossover point of the voltage waveform.

Recording the test result in test record form.

Test conditions:

The duration with a sequence of three dips/interruptions with interval of 10 s minimum
 (Between each test event)

Voltage Dips:

Test Level % U_T	Reduction (%)	Duration (periods)	Observation	Performance Result
<5	>95	0.5	Normal	A
70	30	25	Normal	A

Voltage Interruptions:

Test Level % U_T	Reduction (%)	Duration (periods)	Observation	Performance Result
<5	>95	250	The EUT stopped working during the test, but it can be recovered by operator after test.	C

15.3. INTERPRETATION

Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

☒ **PASS**
☐ **FAIL**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

EN 55032 CONDUCTED EMISSION TEST SETUP



EN 55032 RADIATED EMISSION TEST SETUP

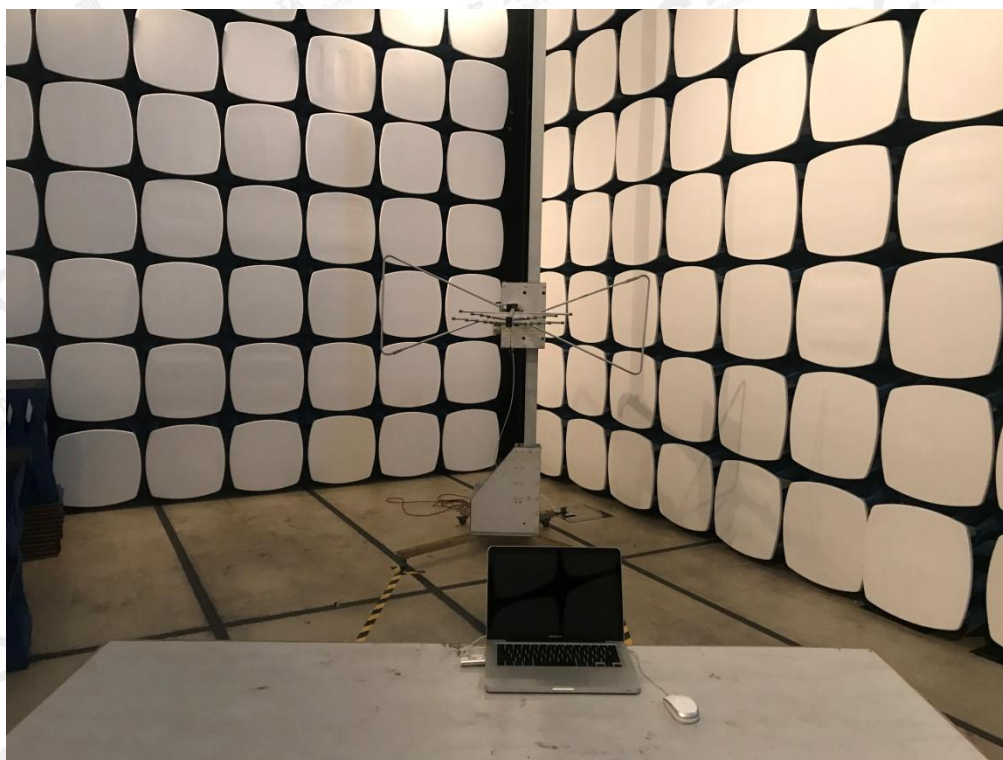


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EN 61000-4-2 ESD IMMUNITY TEST SETUP



EN 61000-4-3 RS IMMUNITY TEST SETUP

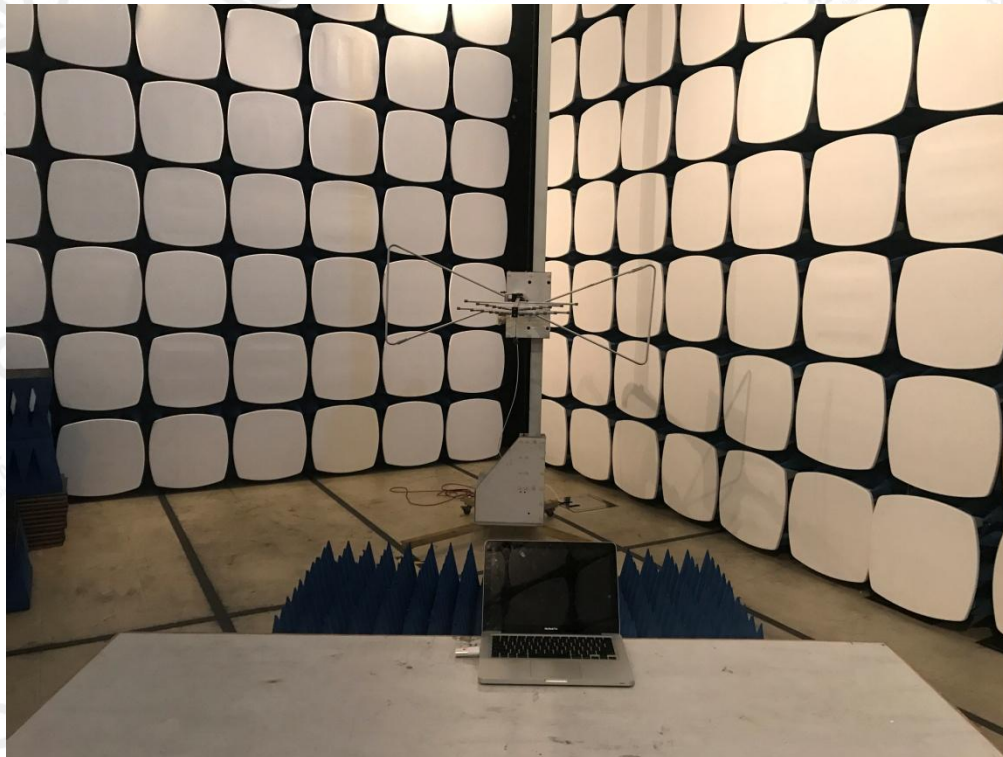


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EN 61000-4-4/-5/-11 EFT/SURGE/DIPS IMMUNITY TEST SETUP




EN 61000-4-6 CS IMMUNITY TEST SETUP

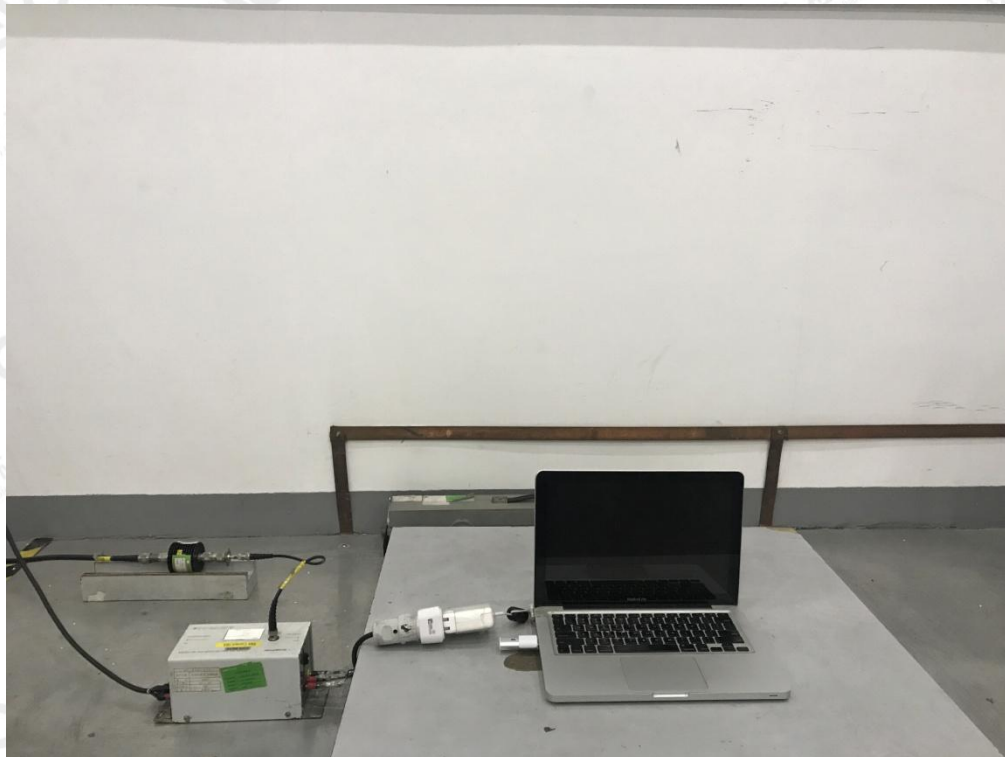


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT

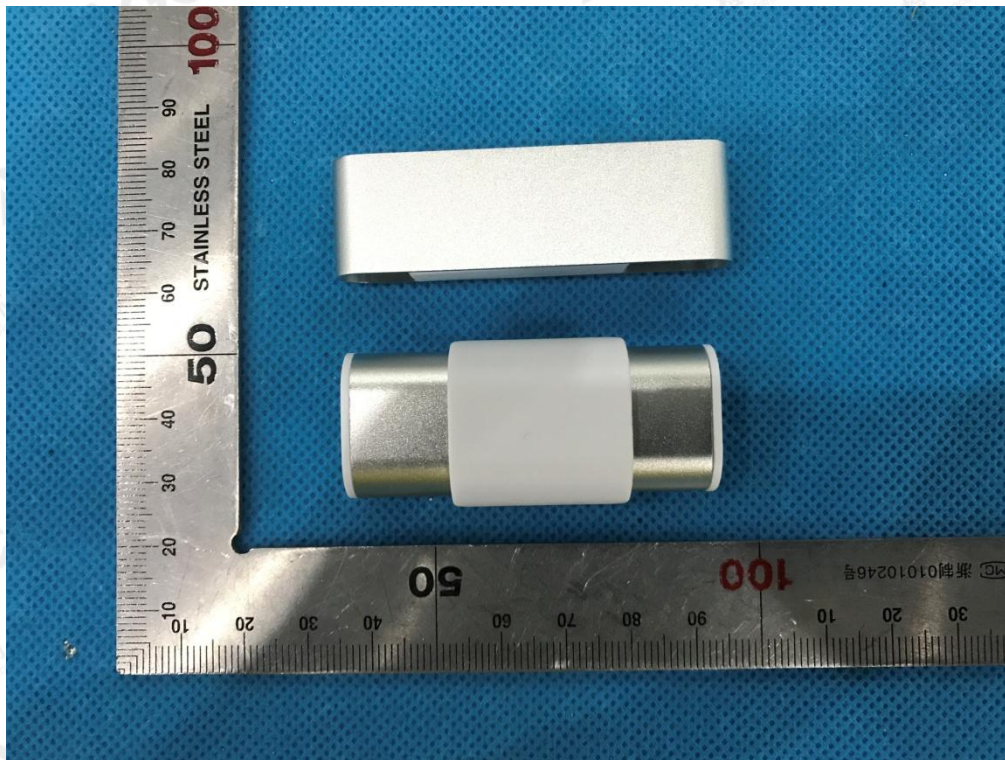


TOP VIEW OF EUT

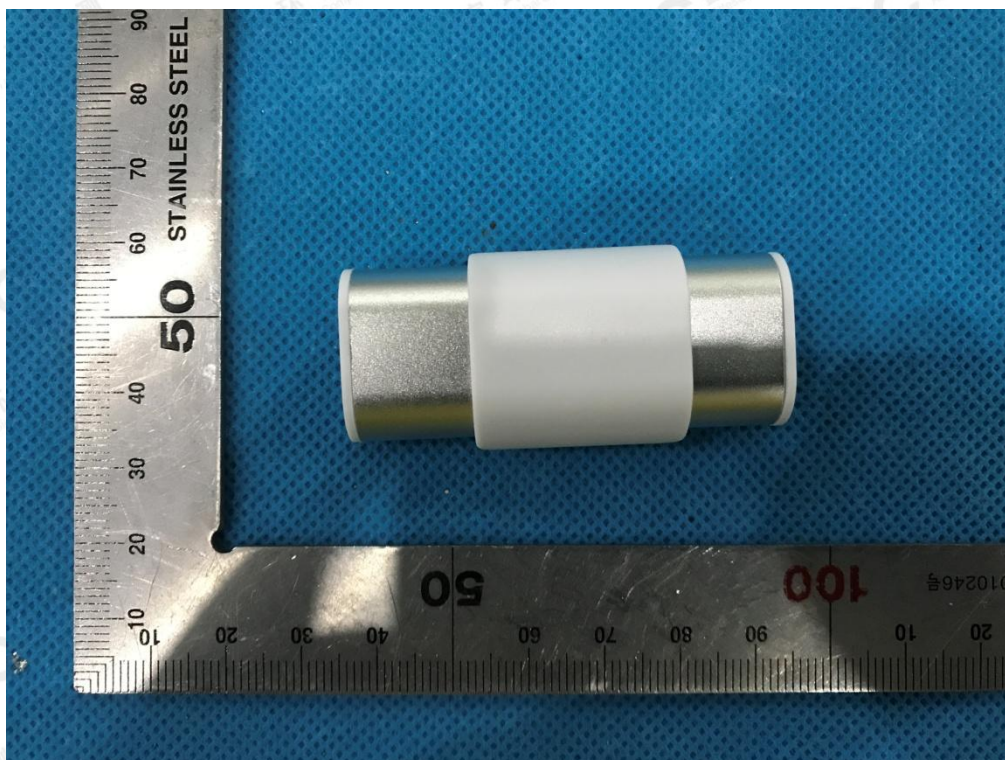


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

BOTTOM VIEW OF EUT

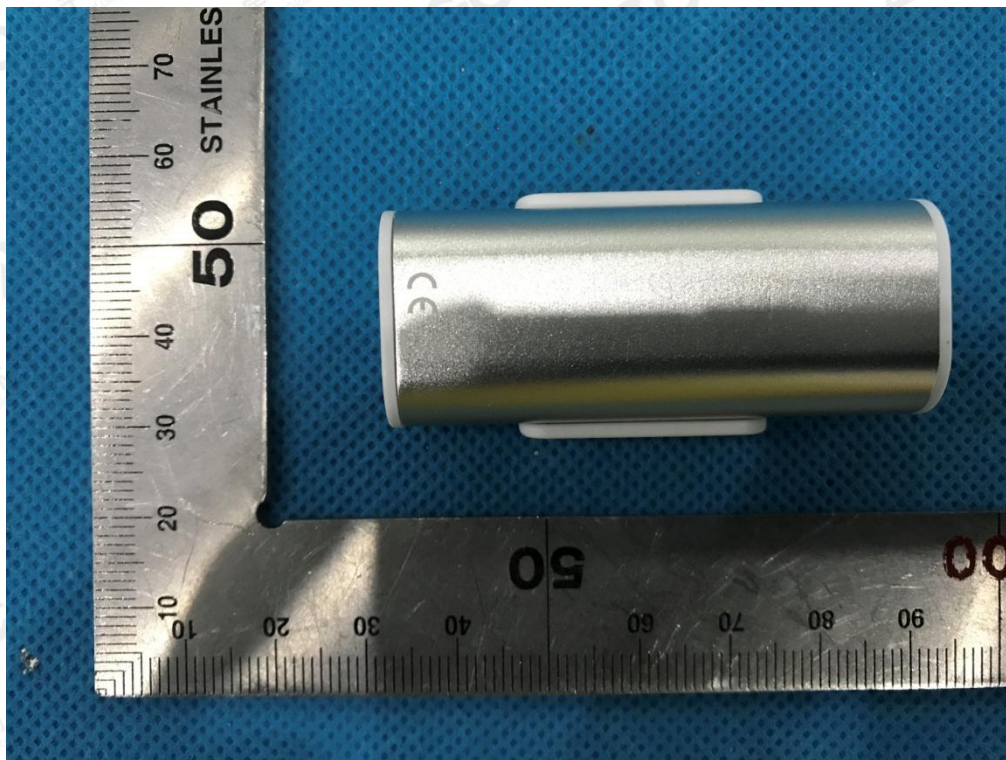

FRONT VIEW OF EUT

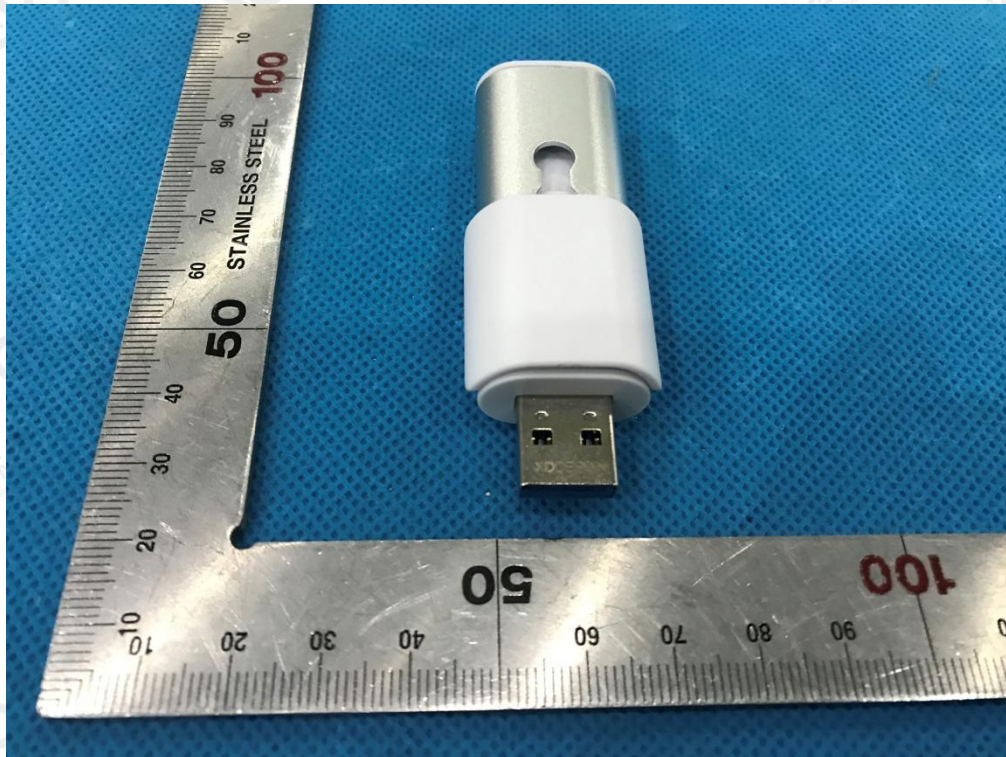


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

BACK VIEW OF EUT




LEFT VIEW OF EUT

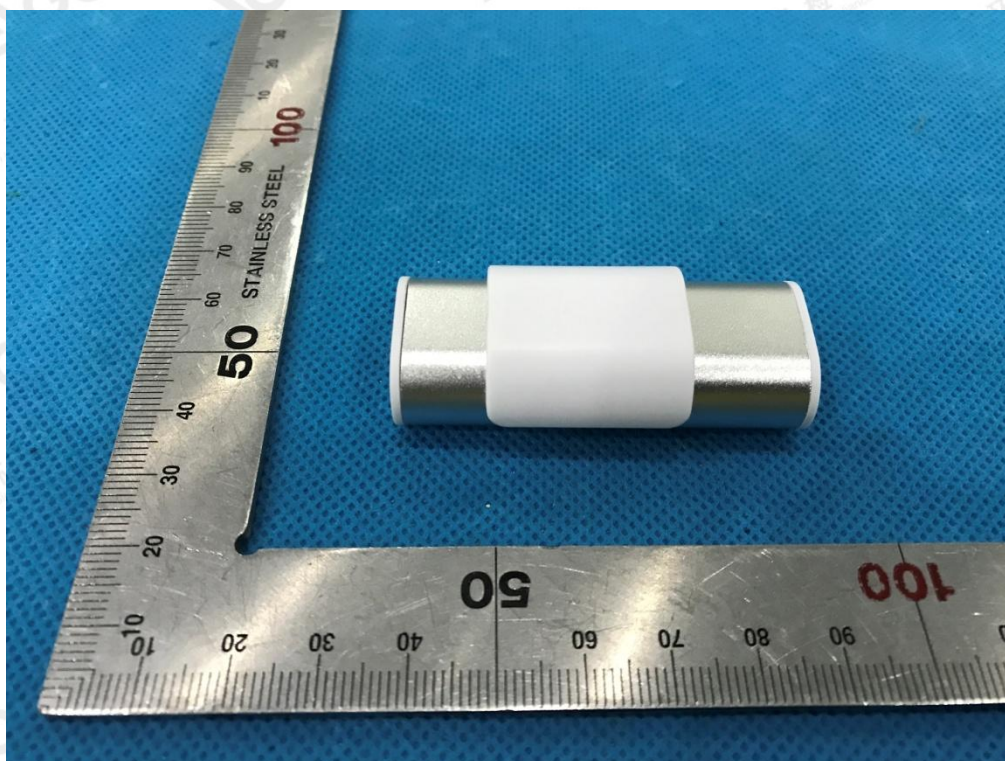

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RIGHT VIEW OF EUT

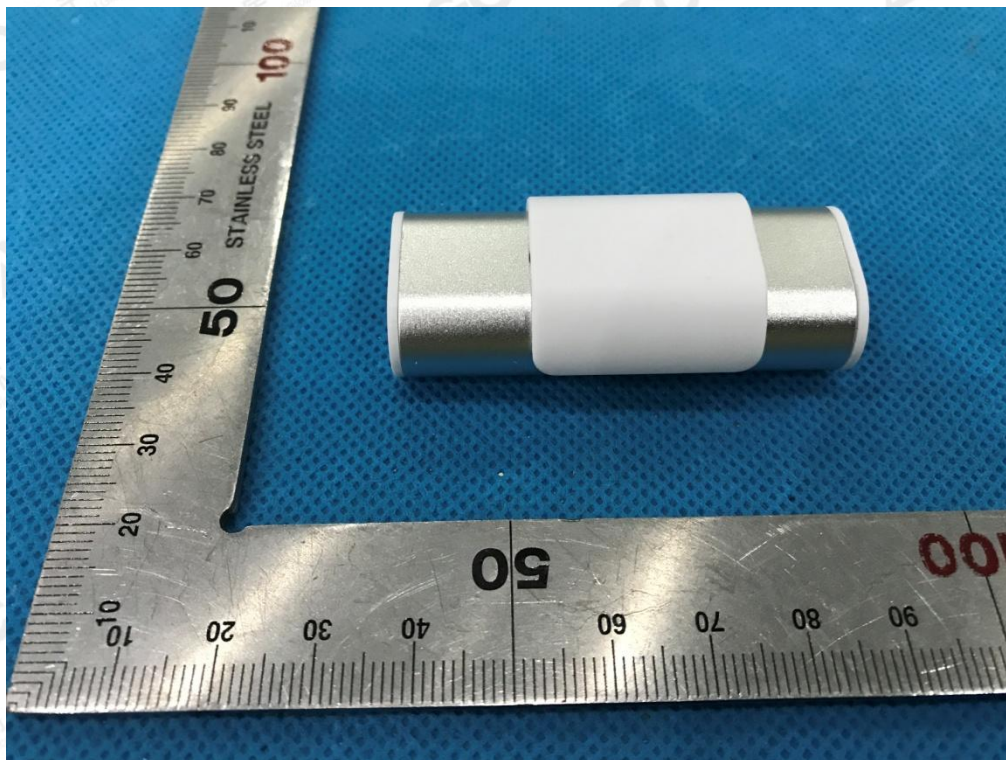


OPEN VIEW OF EUT




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

INTERNAL VIEW OF EUT-1

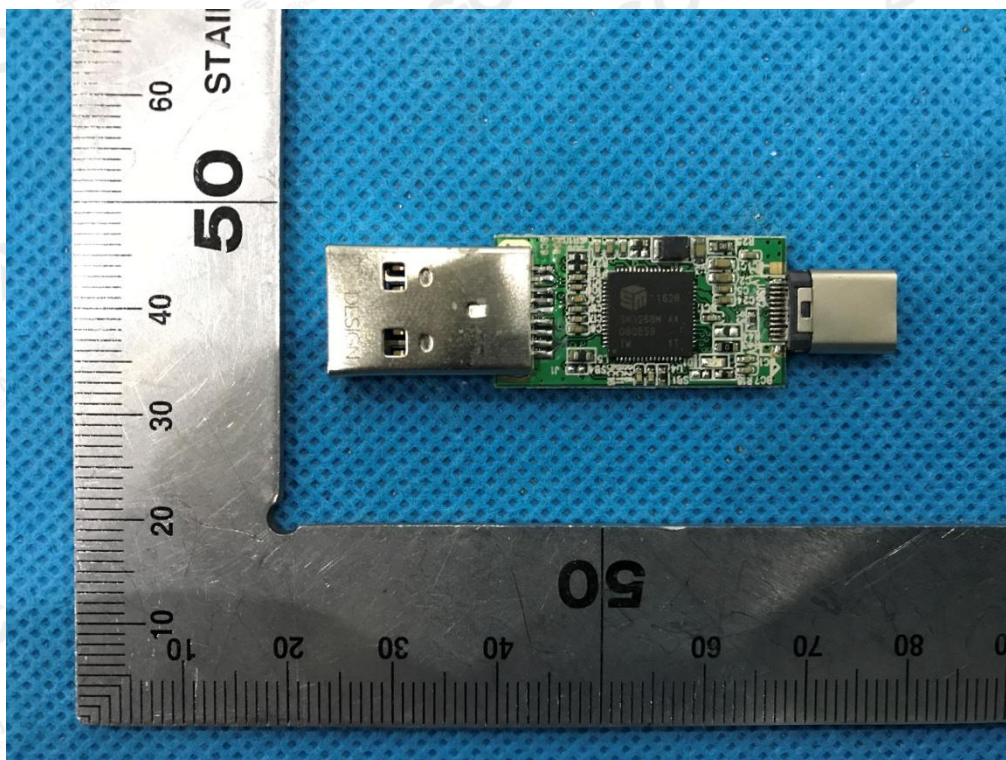

INTERNAL VIEW OF EUT-2

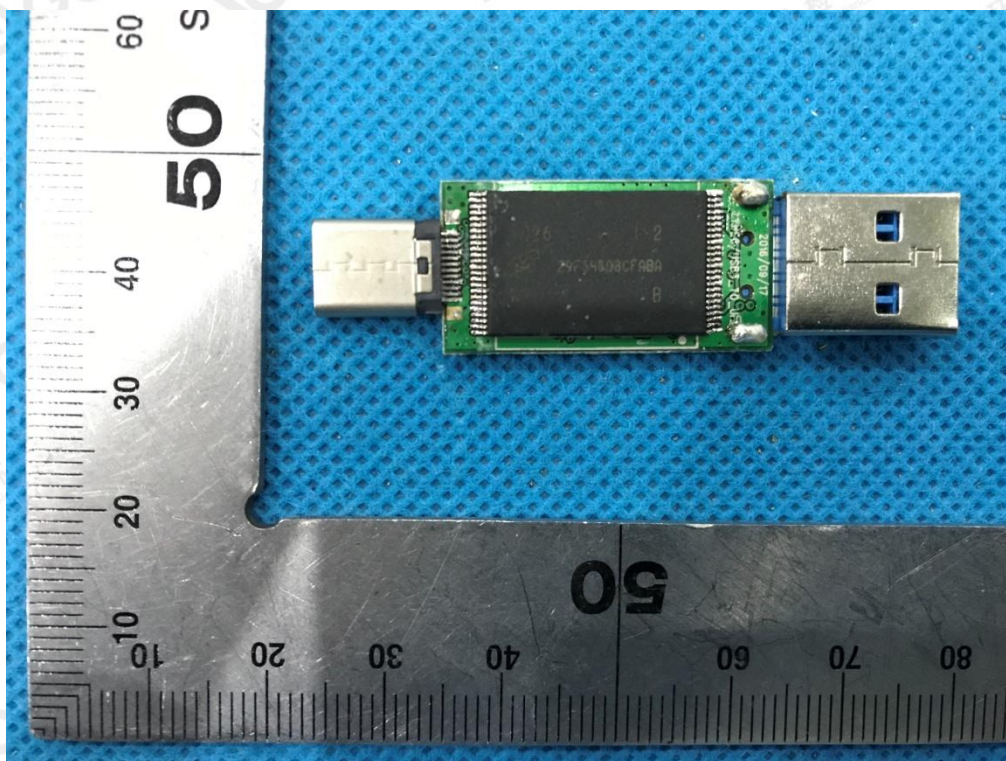

----END OF REPORT----

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.