

No.: ED170904031C002 Date: September 08, 2017 Page 1 of 18

Applicant : Address :

Sample Name : Wireless business earbud

Style/Item No. : P326.751

Sample Received Date : September 04, 2017

Testing Completed Date : September 08, 2017

Test Requested: As requested by client, to evaluate the compliance of the submitted sample

with the Directive 2011/65/EU and amendment directive 2015/863/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of

the use of certain hazardous substances in electrical and electronic

equipment.

Test Method: 1. Review was performed for the sample and the related Bill of Material

submitted by the Applicant.

2. a) To refer to the standard IEC 62321-3-1:2013: Screening by XRF

Spectroscopy.

b) Wet chemical test

1) to refer to IEC 62321-5: 2013, determine the Cadmium, Lead $\,$

content by ICP-OES.

2) to refer to IEC 62321-4: 2013, determine the Mercury content by

ICP-OES.

3) to refer to IEC 62321-7-1:2015 & IEC 62321-7-2:2017, determine

the Hexavalent Chromium content by UV-VIS.

4) to refer to IEC 62321-6:2015, determine the Polybrominated

Biphenyls and Polybrominated Diphenyl Ethers by GC-MS.

Test Results : Please refer to next page (s).





No.: ED170904031C002 Date: September 08, 2017 Page 2 of 18

Conclusion:

Basing on the test results obtained from the homogenous materials, the submitted sample **COMPLIES** with the requirements stated in the Annex II of RoHS Directive 2011/65/EU and amendment directive 2015/863/EU.

Signed for and on behalf of EMTEK (Dongguan) Co., Ltd.

Prepared by:

Cherry Zhu

Report Engineer

Reviewed by:

Carrie Zhang Supervisor Approved by:

Lainey Qin





No.: ED170904031C002 Date: September 08, 2017 Page 3 of 18

Test Results:

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
		Pb	BL			
		Cd	BL		Non comment	
1	Black hard plastic	Hg	BL	NA		
		Cr	BL			
		Br	BL			
		Pb	BL			
CANTER E		Cd	BL			
2	SMD triode	Hg	BL	NA	Non comment	
		Cr	BL			
A VIETE A		Br	BL			
		Pb	BL		Non comment	
	SMD IC	Cd	BL			
3		Hg	BL	NA		
		Cr	BL			
		Br	BL			
	Blue PCB	Pb	BL		Non comment	
		Cd	BL			
4		Hg	BL	PBBs:ND PBDEs:ND		
		Cr	BL			
		Br	X			
Vita a la vi		Pb	BL			
		Cd	BL			
5	SMD capacitor	Hg	BL	NA	Non comment	
E PLANTER		Cr	BL			
Line and the		Br	BL			
CENTRE S		Pb	BL			
A LIGHT OF THE TO	SMD resister	Cd	BL			
6		Hg	BL	NA	Non comment	
		Cr	BL			
Carly Let		Br	BL			





No.: ED170904031C002 Date: September 08, 2017 Page 4 of 18

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
		Pb	BL			
		Cd	BL		Non comment	
7	SMD button switch	Hg	BL	NA		
		Cr	BL			
		Br	BL			
Carrier C		Pb	BL			
		Cd	BL			
8	SMD LED	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
CANAL CO		Pb	BL		Non comment	
	SMD crystal oscillator	Cd	BL			
9		Hg	BL	NA		
CE CHANGE		Cr	BL			
		Br	BL			
KETE YKE	Copper metal	Pb	BL		Non comment	
		Cd	BL	NA		
10		Hg	BL			
		Cr	BL			
V VERTER V		Br	NA			
Ed Vilet		Pb	BL			
		Cd	BL			
11	Silver metal	Hg	BL	NA	Non comment	
		Cr	BL			
TE TO A LIE		Br	NA			
12		Pb	BL			
	Silver metal	Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
A VIET E		Br	NA			





No.: ED170904031C002 Date: September 08, 2017 Page 5 of 18

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
		Pb	BL			
		Cd	BL		Non comment	
13	Silver metal	Hg	BL	NA		
		Cr	BL			
		Br	NA			
F G V FEF		Pb	BL			
		Cd	BL			
14	Copper metal	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	NA			
of Water		Pb	BL		Non comment	
	Transparent plastic film	Cd	BL			
15		Hg	BL	NA		
CAR CANAC		Cr	BL			
		Br	BL			
		Pb	BL		Non comment	
		Cd	BL			
16	Copper metal	Hg	BL	NA		
		Cr	BL			
V.V.C.F.C.F.V.V.		Br	NA			
EA VIET		Pb	BL			
		Cd	BL			
17	Black hard plastic	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
18		Pb	BL			
	Silver metal	Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
		Br	NA			





No.: ED170904031C002 Date: September 08, 2017 Page 6 of 18

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
		Pb	BL			
		Cd	BL		Non comment	
19	White paper	Hg	BL	NA		
		Cr	BL			
		Br	BL			
- F. W. Y. F.		Pb	BL			
		Cd	BL			
20	Brown PCB	Hg	BL	PBBs:ND PBDEs:ND	Non comment	
		Cr	BL	10020110		
		Br	X			
	Black soft plastic	Pb	BL		Non comment	
		Cd	BL			
21		Hg	BL	NA		
		Cr	BL			
		Br	BL			
	Silver metal	Pb	BL		Non comment	
		Cd	BL			
22		Hg	BL	NA		
		Cr	BL			
		Br	NA			
A VICE		Pb	BL			
		Cd	BL			
23	Red soft plastic	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
24		Pb	BL			
	Silver metal	Cd	BL			
		Hg	BL	NA	Non comment	
		Cr	BL			
STATE S		Br	NA			
					W P	





No.: ED170904031C002 Date: September 08, 2017 Page 7 of 18

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
		Pb	BL			
		Cd	BL		Non comment	
25	Silver metal	Hg	BL	NA		
		Cr	BL			
		Br	NA			
		Pb	BL			
		Cd	BL			
26	White hard plastic	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	BL			
		Pb	BL		Non comment	
	Black hard plastic	Cd	BL			
27		Hg	BL	NA		
		Cr	BL			
		Br	BL			
		Pb	BL		Non comment	
		Cd	BL	NA		
28	Black soft plastic	Hg	BL			
		Cr	BL			
		Br	BL			
Ed Willer		Pb	BL			
		Cd	BL			
29	Black soft plastic	Hg	BL	NA	Non comment	
		Cr	BL			
CAN LET		Br	BL			
ALLER EN AL		Pb	BL			
TERRITY ST	Red soft plastic	Cd	BL			
30		Hg	BL	NA	Non comment	
		Cr	BL			
ALLER E		Br	BL			





No.: ED170904031C002 Date: September 08, 2017 Page 8 of 18

No.	Sample description	Restricted substances	Results of EDXRF ⁽¹⁾	Results of Chemical Testing ⁽²⁾ (mg/kg)	Remark	
LET ELVIE		Pb	BL			
		Cd	BL			
31	Copper metal	Hg	BL	NA	Non comment	
		Cr	BL			
		Br	NA			
THE WASTE	Silver metal	Pb	BL		Non comment	
		Cd	BL			
32		Hg	BL	NA		
		Cr	BL			
		Br	NA			
ed Vieteral		Pb	BL			
33	Black soft plastic	Cd	BL		Non comment	
		Hg	BL	NA		
		Cr	BL			
		Br	BL			





No.: ED170904031C002 Date: September 08, 2017 Page 9 of 18

- Remark: (1) ① Results are obtained by XRF for primary screening, and further wet chemical testing by ICP-OES / AAS (for Cd, Pb, Hg), UV-VIS (for Cr(VI)) and GC/MS (for PBBs, PBDEs) is recommended to be performed, if an inconclusive result was found (as "X" in below table) (unit: mg/kg).
 - ② OL = Over Limit, BL = Below Limit, X = Inconclusive, NA= Not Applicable.
 - ③ The XRF screening test for RoHS elements The reading may be different to the actual content in the sample be of non-uniformity composition.

Element	Polymer	Metal	Composite Materials	
Cd	$BL \leq (70-3\sigma) < X < (130+3\sigma)$ $\leq OL$	$BL \leq (70-3\sigma) < X < (130+3\sigma)$ $\leq OL$	LOD < X <(150+3 σ)≤ OL	
Pb	BL \leq (700-3 σ) < X < (1300+3 σ) \leq OL	BL \leq (700-3 σ) < X <(1300+3 σ) \leq OL	BL \leq (500-3 σ)< X <(1500+3 σ) \leq OL	
Hg	BL \leq (700-3 σ) < X < (1300+3 σ) \leq OL	BL \leq (700-3 σ) < X <(1300+3 σ) \leq OL	BL \leq (500-3 σ)< X <(1500+3 σ) \leq OL	
Br	BL ≤ (300-3 <i>σ</i>)< X	NA	BL ≤ (250-3 σ)< X	
- Cr	BL ≤ (700-3 <i>σ</i>)< X	BL ≤ (700-3 <i>σ</i>)< X	BL ≤ (500-3 <i>σ</i>)< X	

- (2) ① mg/kg = ppm = 0.0001%, ND = Not Detected (Less than reporting limit value.).
 - 2 Unit, Reporting Limit (RL) and Requirement limit in wet chemical test.

Test items	Pb	Cd	Hg	Cr6+(Non-metal)	Cr6+(metal)	PBBs(single)	PBDEs(single)
Unit	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
RL	2	2	2	2	2	5	5
Requirement Limit	1000	100	1000	1000	Negative	1000	1000

- 3 According to IEC 62321-7-1:2015 & IEC 62321-7-2:2017, result on Cr⁶⁺ for metal sample is shown as Positive/Negative.
 - Negative = Absence of Cr^{6+} coating, Positive = Presence of Cr^{6+} coating. Storage condition and production date of the tested sample are unavailable and thus results of Cr^{6+} represent status of the sample at the time of testing.
- 4 According to IEC 62321-3-1:2013, this column represents the results of wet chem test. And "NA" means no need to perform wet chem test, when the XRF sereening results are qualified.





No.: ED170904031C002 Date: September 08, 2017 Page 10 of 18

Photo Appendix








No.: ED170904031C002 Date: September 08, 2017 Page 11 of 18

Photo Appendix



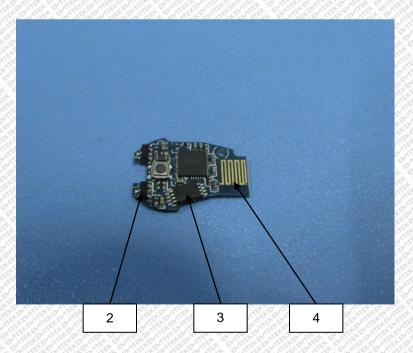







No.: ED170904031C002 Date: September 08, 2017 Page 12 of 18

Photo Appendix

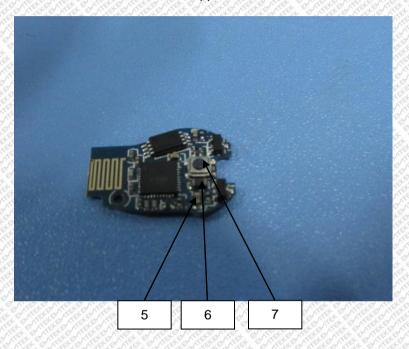

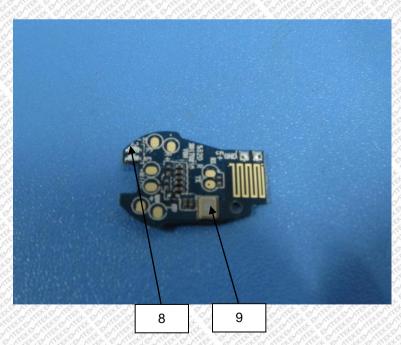







No.: ED170904031C002 Date: September 08, 2017 Page 13 of 18

Photo Appendix

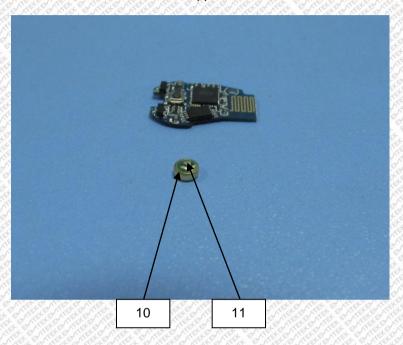

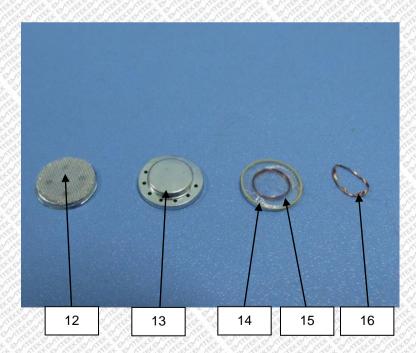







No.: ED170904031C002 Date: September 08, 2017 Page 14 of 18

Photo Appendix

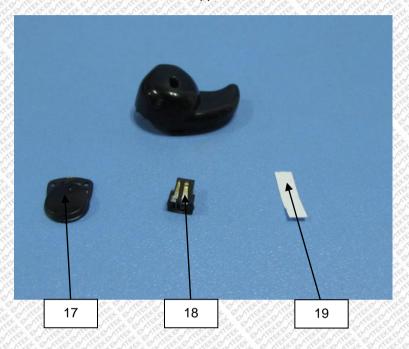

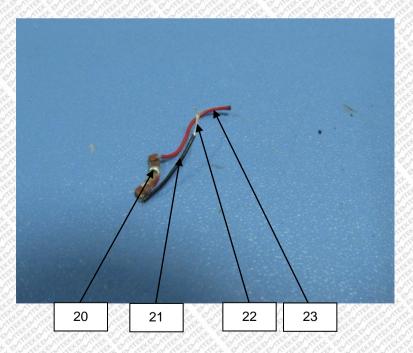







No.: ED170904031C002 Date: September 08, 2017 Page 15 of 18

Photo Appendix

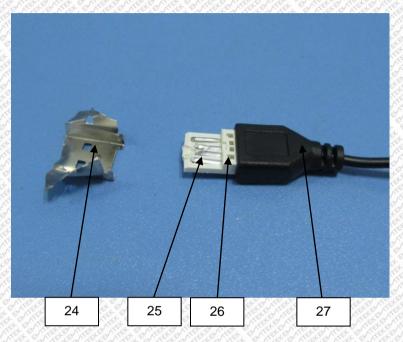

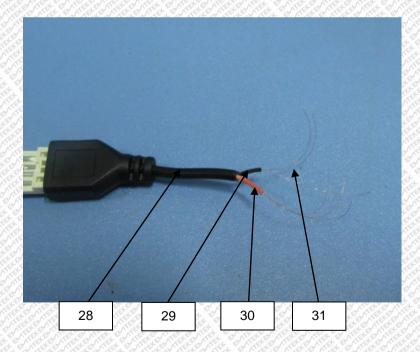






No.: ED170904031C002 Date: September 08, 2017 Page 16 of 18

Photo Appendix

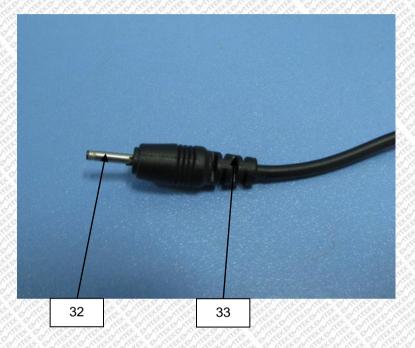

* * * * * * The End * * * * * *





No.: ED170904031C002 Date: September 08, 2017 Page 17 of 18

ANNEX

EXEMPTION LIST

- 1 Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):
- 1(a) For general lighting purposes < 30W: 5mg (expires on 31 December 2011; 3.5mg may be used per burner after 31 December 2011 until 31 December 2012; 2.5mg shall be used per burner after 31 December 2012)
- 1(b) For general lighting purposes ≥ 30W and <50W: 5mg (expires on 31 December 2011; 3.5mg may be used per burner after 31 December 2011)
- 1(c) For general lighting purposes ≥ 50W and <150W: 5mg
- 1(d) For general lighting purposes ≥ 150W: 15mg
- 1(e) For general lighting purposes with circular or square structural shape and tube diameter ≤17mm (no limitation of use until 31 December 2011; 7mg may be used per burner after 31 December 2011)
- 1(f) For special purposes: 5mg
- 1(g) For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg (Expires on 31 December 2017)
- 2(a) Mercury in double-capped linear fluorescent lamps for general lighting purples not exceeding (per lamp):
- 2(a)(1) Tri-band phosphor with normal lifetime and a tube diameter < 9mm (e.g. T2): 5mg (expires on 31 December 2011; 4mg may be used per lamp after 31 December 2011)
- 2(a)(2) Tri-band phosphor with normal lifetime and a tube diameter ≥ 9mm and ≤ 17mm (e.g. T5): 5mg (expires on 31 December 2011; 3mg may be used per lamp after 31 December 2011)
- 2(a)(3) Tri-band phosphor with normal lifetime and a tube diameter > 17mm and ≤ 28mm (e.g. T8): 5mg (expires on 31 December 2011; 3.5mg may be used per lamp after 31 December 2011)
- 2(a)(4) Tri-band phosphor with normal lifetime and a tube diameter > 28mm (e.g. T12): 5mg (expires on 31 December 2012; 3.5mg may be used per lamp after 31 December 2012)
- 2(a)(5) Tri-band phosphor with long lifetime (≥ 25000h): 8mg (expires on 31 December 2011; 5mg may be used per lamp after 31 December 2011)
- 2(b) Mercury in other fluorescent lamps not exceeding (per lamp):
- 2(b)(2) Non-linear halophosphate lamps (all diameters): 15mg (expires on 13 April 2016)
- 2(b)(3) Non-linear tri-band phosphor lamps with tube diameter > 17mm (e.g. T9) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 2(b)(4) Lamps for other general lighting and special purposes (e.g. induction lamps) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 3 Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):
- 3(a) Short length (≤ 500mm) (No limitation of use until 31 December 2011; 3.5mg may be used per lamp after 31 December 2011)
- 3(b) Medium length (> 500m and ≤ 1500mm) (No limitation of use until 31 December 2011; 5mg may be used per lamp after 31 December 2011)
- 3(c) Long length (> 1500mm) (No limitation of use until 31 December 2011; 13mg may be used per lamp after 31 December 2011)
- 4(a) Mercury in other low pressure discharge lamps (per lamp) (no limitation of use until 31 December 2011; 15mg may be used per lamp after 31 December 2011)
- 4(b) Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60:
- 4(b)-l P ≤ 155W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(b)-II 155W < P ≤ 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(b)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(c) Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):
- 4(c)-I P≤ 155W (no limitation of use until 31 December 2011; 25mg may be used per burner after 31 December 2011)
- 4(c)-II 155W < P ≤405W (no limitation of use until 31 December 2011; 30mg may be used per burner after 31 December 2011) 4(c)-III P > 405W (no limitation of use until 31 December 2011; 40mg may be used per burner after 31 December 2011)
- 4(d) Mercury in High Pressure Mercury (vapour) lamps (HPMV) (expires on 13 April 2015)
- 4(e) Mercury in metal halide lamps (MH)
- 4(f) Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex
- 4(g) Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and lightartwork, where the mercury content shall be limited as follows: (Expires on 31 December 2018)
 - (a) 20 mg per electrode pair + 0,3 mg per tube length in cm, but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20 ° C;
 - (b) 15 mg per electrode pair + 0,24 mg per tube length in cm, but not more than 80 mg, for all other indoor applications.





No.: ED170904031C002 Date: September 08, 2017 Page 18 of 18

ANNEX

EXEMPTION LIST

Continued

5(a)	Lead in glass of cathode ray tubes
5(b)	Lead in glass of fluorescent tubes not exceeding 0.2% by weight
6(a)	Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0.35% lead by weight
6(b)	Lead as an alloying element in aluminium containing up to 0.4% lead by weight
6(c)	Copper alloy containing up to 4% lead by weight.
7(a)	Lead in high melting temperature type solders (i.e. lead based alloys containing 85% by weight or more lead)
7(b)	Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications
7(c)-l	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound
7(c)-II	Lead in dielectric ceramic in capacitors for a rated voltage of 125V AC or 250V DC or higher
7(c)-III	Lead in dielectric ceramic in capacitors for a rated voltage of less than 125V AC or 250V DC (expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013).
7(c)-IV	Lead in PZT based dielectric ceramic materials for capacitors being part of integrated circuits or discrete semiconductors
8(a)	Cadmium and its compounds in one shot pellet type thermal cut-offs (expires on 1 January 2012 and after that date may be used in spare parts for EEE placed on the market before 1 January 2012)
8(b)	Cadmium and its compounds in electrical contacts
9`′	Hexavalent chromium as an anti-corrosion agent of the carbon steel cooling system in absorption refrigerators up to 0.75% by weight in the cooling solution
9(b)	Lead in bearing shells and bushes for refrigerant-containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications
11(b)	Lead used in other than C-press compliant pin connector systems (expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013)
13(a)	Lead in white glasses used for optical applications
13(b)	Cadmium and lead in filter glasses and glasses used for reflectance standards
14	Lead in solders consisting of more than two elements for the connection between the pins and the package of microprocessors with a lead content of more than 80% and less than 85% by weight (expires on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011)
15	Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit Flip Chip packages
17	Lead halide as radiant agent in High Intensity Discharge (HID) lamps used for professional reprography applications
18(b)	Lead as activator in the fluorescent powder (1% lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi ₂ O ₅ :Pb)
21	Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glass
24	Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors
25	Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring
29	Lead bound in crystal glass as defined in Annex 1 (Categories 1, 2, 3 and 4) of Council Directive 69/493/EEC
30	Cadmium alloys as electrical/mechanical solder joints to electrical conductors located directly on the voice coil in transducers used in high-powered loudspeakers with sound pressure levels of 100 dB (A) and more
31	Lead in soldering materials in mercury free flat fluorescent lamps (which e.g. are used for liquid crystal displays, design or industrial lighting)
32	Lead oxide in seal frit used for making window assemblies for Argon and Krypton laser tubes
33	Lead in solders for the soldering of thin copper wires of 100 µm diameter and less in power transformers
34	Lead in cermet-based trimmer potentiometer elements
37	Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body
38	Cadmium and cadmium oxide in thick film pastes used on aluminium bonded beryllium oxide
39	Cadmium in colour converting II-VI LEDs (< 10 μg Cd per mm² of light- emitting area) for use in solid state illumination or display systems (expires on 1 July 2014)
41	Lead in solders and termination finishes of electrical and electronic components and finishes of printed circuit boards used in

This Test Report is issued by the Company subject to its Conditions of Issuance of Test Reports printed overleaf and is intended for your exclusive use. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. This test report includes all of the tests requested by you and the results thereof based upon the information that you provided. You have 30 days from date of Issuance of this test report to notify us of any error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents:

ignition modules and other electrical and electronic engine control systems, which for technical reasons must be mounted directly on or in the crankcase or cylinder of hand-held combustion engines (classes SH:1, SH:2, SH:3 of Directive 97/68/EC of



the European Parliament and of the Council (2)) (Expires on 31 December 2018)