


<p align="center">TEST REPORT EN 60065 Audio, Video and Similar Electronic Apparatus: Safety Requirements</p>	
Report Reference No.....:	ED170717012S
Date of issue.....:	August 09, 2017
Total number of pages	46 pages
Testing Laboratory	EMTEK(DONGGUAN) CO., LTD.
Address	No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China.
Tested by (name + signature).....:	Cher Li 
Approved by (+ signature)	Eddie Yang 
	
Applicant's name	
Address	
Manufacturer's name	
Address	
First Factory's name	
Address	
Test specification:	
Standard	EN 60065: 2014
Procedure deviation.....:	N/A
Non-standard test method.....:	N/A
Test item description	" TWInS " TWS Bluetooth Sporty Earphone Set
Trade Mark	
Model/Type reference	BH-289
Ratings.....:	Input: 5.0V ⁻⁻⁻ , 500mA
	Lithium ion battery: 3.7V, 40mAh, 0.148Wh

Copy of marking plate:

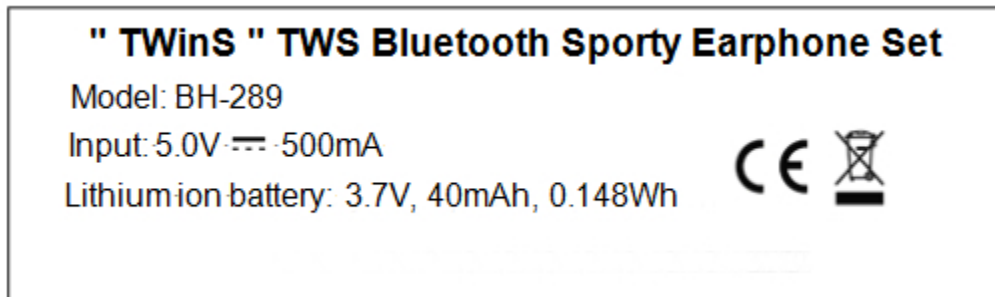

Note:


- The above markings are the minimum requirements required by the safety standard. For the final production, the additional markings which do not give rise to misunderstanding may be added.
- The height of CE mark and WEEE symbol should be at least 5 mm and 7 mm respectively.

Summary of testing:

1) Following tests performed during evaluation.

Clause(s)	Test(s)
5.1	Durability of Marking Test
7.1	Heating Under Normal Operations
11.1	Electric Shock Hazard under Fault Condition
11.2	Heating under fault condition Test
12.1.3	Vibration test
12.1.4	Impact Test
12.1.6	Stress Relief Test
12.2	Fixing of knobs, push buttons, keys and levers
14.11.3	Batteries
17.1	Screw Test

<p>Test item particulars :</p> <p>Classification of installation and use : Not Class I and Class II equipment</p> <p>Supply connection : Supply by external DC Source</p>
<p>Possible test case verdicts:</p> <p>- test case does not apply to the test object : N/A(N)</p> <p>- test object does meet the requirement..... : Pass (P)</p> <p>- test object does not meet the requirement..... : Fail (F)</p>
<p>Testing:</p> <p>Date of receipt of test items : July 17, 2017</p> <p>Date(s) of performance of tests : July 17, 2017 to July 31, 2017</p>
<p>General remarks:</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(see Enclosure #)" refers to additional information appended to the report.</p> <p>"(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report, a point (coma) is used as the decimal separator.</p> <p>List of test equipment must be kept on file and available for review.</p>
<p>General product information:</p> <p>-The product supply by external DC source.</p> <p>Note</p> <p>The product is designed for operating under below conditions:</p> <ul style="list-style-type: none"> – Max. specified ambient temperature is 35°C, – Altitude up to 2000m, – Overvoltage category II & Pollution degree 2

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
3	General requirements		P
	Safety class of the apparatus	Not Class I and Class II	P
4	General test conditions		P
4.1.4	Ventilation instructions require the use of the test box	Not used	N/A
5	MARKING AND INSTRUCTIONS		P
5.1	General requirements		P
	Comprehensible and easily discernible	The rating label is easily discernible	P
	Permanent durability against water and petroleum spirit	Tested and complied	P
5.2	Identification and supply rating		P
	a) Identification, maker	Refer to pages 1 for details	P
	b) Model number or type reference.....	Refer to pages 1 for details	P
	c) Class II symbol or Class II with functional earth symbol if applicable	Not class II equipment	N/A
	d) Nature of supply		P
	e) Rated supply voltage	5V	P
	f) Mains frequency if safety dependant		N/A
	g) Rated current or power consumption for apparatus supplied by supply apparatus for general use, on apparatus or in instruction manual.....	Supply by Mic USB port: 500mA	P
	Measured current or power consumption	(see appended table 7.1)	P
	Deviation % (max 10%)	(see appended table 7.1)	P
	h) Rated current or power consumption for apparatus intended for connection to an a.c. mains supply		N/A
	Measured current or power consumption		N/A
	Measured current or power consumption for Television set	No TV set.	N/A
	Deviation % (max 10%)		N/A
	Symbols explained in the user manual		N/A
5.3	Terminals		N/A
	a) Earth terminal		N/A
	b) Hazardous live terminals	No such terminals	N/A
	c) Markings on supply output terminals	No such terminals	N/A
5.4	Caution marking		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

	a) Use of triangle with exclamation mark		N/A
	b) Marking on loudspeaker grille, IEC 60417-5036	No such terminals	N/A
	c) User-replaceable coin / button cell battery marking		N/A
5.5	Instructions		P
5.5.1	Safety relevant information	Provided in user manual	P
5.5.2	a) Mains powered equipment not exposed to dripping or splashing. Warning concerning objects filled with liquid, etc.		N/A
	b) Hazardous live terminals, instructions for wiring	No such terminals.	N/A
	c) Instructions for replacing lithium battery		N/A
	d) Class I earth connection warning		N/A
	e) Instructions for multimedia system connection	Mentioned in user manual	P
	f) Special stability warning for attachment of the apparatus to the floor/wall	No need.	N/A
	g) Warning: battery exposure to heat		P
	h) Warning: protective film on CRT face	No CRT used	N/A
	i) Warning: Non-floor standing TV >7kg	Not a TV	N/A
	j) Warning: User replaceable coin / button cell battery		N/A
5.5.3	a-b) Disconnect device: plug/coupler or all-pole mains switch location, accessibility and markings	Supply by external DC Source	N/A
	c) Instructions for permanently connected equipment	No such equipment	N/A
	Marking, signal lamps or similar for completely disconnection from the mains		N/A

6	Hazardous radiation		P
6.1	Ionizing radiation < 36 pA/kg (0,5 mR/h)		N/A
	Ionizing radiation under fault condition		N/A
6.2	Laser radiation, emission limits to IEC 60825-1		N/A
	Emission limits under fault conditions		N/A
6.3	Light emitting diodes (LEDs) according to IEC 62471	Low power devices.	P

7	Heating under normal operating conditions		P
7.1	Temperature rises not exceeding specified values, no operation of fuse links	During intended use, no part of the apparatus shall attain an excessive temperature. (See appended table 7.1)	P
7.1.1	Temperature rise of accessible parts	(see appended table 7.1)	P

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

7.1.2	Temperature rise of parts providing electrical insulation	(see appended table 7.1)	P
7.1.3	Temperature rise of parts acting as a support or as a mechanical barrier		N/A
7.1.4	Temperature rise of windings		N/A
7.1.5	Parts not subject to a limit under 7.1.1 to 7.1.4		N/A
7.2	Softening temperature of insulating material supporting parts conductively connected to the mains carrying a current > 0,2 A at least 150 °C		N/A

8	CONSTRUCTIONAL REQUIREMENTS WITH REGARD TO THE PROTECTION AGAINST ELECTRIC SHOCK <i>EUT supplied by internal Li-ion battery .</i>		N/A
8.1	Conductive parts covered by lacquer, paper, untreated textile oxide films and beads etc. considered to be bare		N/A
8.2	No shock hazard when changing voltage setting device, fuse-links or handling drawers etc.		N/A
8.3	Insulation of hazardous live parts not provided by hygroscopic material		N/A
8.4	No risk of electric shock from accessible parts or from parts rendered accessible following the removal of a cover which can be removed by hand		N/A
8.5	Class I apparatus		N/A
	Basic insulation between hazardous live parts and earthed accessible parts		N/A
	Resistors bridging basic insulation complying with 14.2 a)		N/A
	Capacitors bridging basic insulation complying with 14.3.2 a)		N/A
	Protective earthing terminal		N/A
8.6	Class II apparatus		N/A
	a) Basic and supplementary insulation between hazardous live parts and accessible parts		N/A
	b) Reinforced insulation between hazardous live parts and accessible parts		N/A
8.7	Components bridging insulation		N/A
	Basic insulation bridged by components complying with 14.4.5.3		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
	Components bridging basic, supplementary, double or reinforced insulation complying with 14.2 a) or 14.4		N/A
	Basic and supplementary insulation each being bridged by a capacitor or RC-unit complying with 14.3.2 a)		N/A
	Double or reinforced insulation being bridged with 2 capacitors or RC-units in series complying with 14.3.2 a)		N/A
	Double or reinforced insulation being bridged with a single capacitor or RC-unit complying with 14.3.2 b)		N/A
8.8	Insulation thickness and thin sheet materials		N/A
	Basic or supplementary insulation > 0,4 mm (mm) .:		N/A
	Reinforced insulation > 0,4 mm (mm):		N/A
	Thin sheet material used inside the equipment		N/A
	Basic or supplementary insulation, at least two layers, each meeting 10.4		N/A
	Basic or supplementary insulation, three layers any two of which meet 10.4		N/A
	Reinforced insulation, two layers each of which meet 10.4		N/A
	Reinforced insulation, three layers any two which meet 10.4		N/A
8.9	Adequate insulation between internal hazardous live conductors and accessible parts, or between internal hazardous live parts and conductors connected to accessible parts		N/A
8.10	Double insulation between accessible parts and conductors connected to the mains		N/A
	Double insulation between conductors connected to accessible parts and parts connected to the mains		N/A
8.11	Detaching of wires		N/A
	No undue reduction of creepage or clearance distances if wires become detached		N/A
	Vibration test carried out:		N/A
8.12	Adequate fastening of windows, lenses, lamp covers etc. (pull test 20 N for 10 s)		N/A
8.13	Adequate fastening of covers (push/pull test 50 N for 10 s)		N/A
8.14	No risk of damage to the insulation of internal wiring due to hot parts or sharp edges		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

8.15	Only special supply equipment can be used		N/A
8.16	Insulated winding wire without additional interleaved insulation		N/A
8.17	Endurance test as required by 8.16		N/A
8.18	Disconnection from the mains		N/A
	Disconnect device		N/A
	All-pole switch or circuit breaker with >3mm contact separation		N/A
	Mains switch ON indication		N/A
8.19	Switch not fitted in the mains cord		N/A
8.20	Bridging components comply with clause 14		N/A
8.21	Non-separable thin sheet material		N/A

9	ELECTRIC SHOCK HAZARD UNDER NORMAL OPERATING CONDITION <i>EUT supplied by Li-ion battery .</i>		N/A
9.1	Testing on the outside		N/A
9.1.1	General		N/A
9.1.1.1	Requirements		N/A
	Accessible parts shall not be hazardous live		N/A
	Inaccessible terminals are not accessible or comply with relevant requirements	No such terminals are hazardous live.	N/A
	For voltages >1000 V ac or >1500 V dc complies with clause 13.3.1 for basic insulation..... :	No such high voltage	N/A
9.1.1.2	Determination of hazardous live parts		N/A
	a) Open circuit voltages		N/A
	b) Touch current measured from terminal devices using the network in annex D		N/A
	c) Discharge not exceeding 45 µC		N/A
	d) Energy of discharge not exceeding 350 mJ		N/A
9.1.1.3	Test with test finger and test probe		N/A
9.1.2	No hazardous live shafts of knobs, handles or levers		N/A
9.1.3	Ventilation holes and other holes tested by means of 4 mm x 100 mm test pin		N/A
9.1.4	Terminal devices tested with 1 mm x 20 mm test pin (10 N); test probe D of IEC 61032		N/A
	Terminal devices tested with 1 mm x 100 mm straight wire (1 N); test probe D of IEC 61032		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

9.1.5	Pre-set controls tested with 2.5 mm x 100 mm test pin (10 N); test probe C of IEC 61032		N/A
9.1.6	Withdrawal of the mains plug		N/A
	No shock hazard due to stored charge after 2 s :		N/A
	Bleeder resistor(s) comply with 14.2 or no shock hazard when open circuited		N/A
	If C is not greater than 0,1 μ F no test needed		N/A
9.1.7	Resistance to external force		N/A
	a) Test probe 11 of IEC 61032 for 10 s (50 N)	No hazardous live parts are become accessible	N/A
	b) Test hook of fig. 4 for 10 s (20 N)		N/A
	c) 30 mm diameter test tool for 5 s (100 or 250 N)		N/A
9.2	No hazard after removing a cover by hand	Tools are required	N/A

10	INSULATION REQUIREMENTS <i>EUT supplied by Li-ion battery .</i>		N/A
10.2	Insulation resistance (M Ω) at least 2 M Ω min. after surge test for basic and 4 M Ω min. for reinforced insulation		N/A
10.3	Humidity treatment 48 h or 120 h		N/A
10.4	Insulation resistance and dielectric strength		N/A
	Between parts of different polarity directly connected to the mains		N/A
	Between parts separated by BASIC or SUPPLEMENTARY insulation		N/A
	Between parts separated by REINFORCED insulation		N/A

11	FAULT CONDITIONS		P
11.1	No shock hazard under fault condition		P
11.2	Heating		P
11.2.1	Requirements		P
	No danger of fire to the surroundings		P
	Safety not impaired by abnormal heat		P
	Flames extinguish within 10 seconds	No flames	N/A
	No hazard from softening solder	No softening solder	N/A
	Soldered terminations not used as protective mechanism		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

11.2.2	Measurement of temperature rises	(see appended table 11)	P
11.2.3	Temperature rise of accessible parts	(see appended table 11)	P
11.2.4	Temperature rise of parts, other than windings and printed boards, providing electrical insulation	(see appended table 11)	P
11.2.5	Temperature rise of parts acting as a support or mechanical barrier	No such parts used	N/A
11.2.6	Temperature rise of windings		N/A
11.2.7	Printed boards		P
	Temperature rise does not exceed the limits of table 3 or exceed the limits of table 3 by max. 100 K for max. 5 min	(see appended table 11)	P
	a) Temperature rise of V-0 or VTM-0 printed circuit boards exceeding the limits of table 3 by not more than 100 K for an area not greater than 2 cm ²		N/A
	b) Temperature rise of V-0 or VTM-0 printed circuit boards exceeding the limits of table 3 up to 300 K for an area not greater than 2 cm ² for a maximum of 5 min		N/A
	Meets all the special conditions if conductors on printed circuit boards are interrupted		N/A
	Class I protective earthing maintained		N/A
11.2.8	Temperature rise of parts not subject to the limits of 11.2.2 to 11.2.7 shall not exceed the limits in table 3, item e), "Fault conditions".		N/A

12	MECHANICAL STRENGTH		P
12.1	Complete apparatus		P
12.1.1	The apparatus have adequate mechanical strength		P
12.1.2	Bump test where mass >7 kg	<7kg	N/A
12.1.3	Vibration test	No damage	P
12.1.4	Impact hammer test	No damage	P
	Steel ball test	2J, no damage	P
12.1.5	Drop test for portable apparatus where mass ≤ 7 kg	Not portable apparatus	N/A
12.1.6	Thermoplastic enclosures stress relief test	70°C, 7H	P
12.2	Fixing of knobs, push buttons, keys and levers		P
12.3	Remote controls with hazardous live parts	No such remote controls	N/A
12.4	Drawers (pull test 50 N, 10 s)	No such drawers	N/A
12.5	Antenna coaxial sockets providing isolation	No such antenna coaxial sockets	N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

12.6	Telescoping or rod antennas		N/A
12.6.1	6,0mm diameter end	No antennas used	N/A
	Prevented from falling into the apparatus		N/A
12.6.2	Physical securement, removal prevented		N/A
12.7	Apparatus containing coin / button cell batteries		N/A
12.7.2	Reduced possibility for children to remove battery		N/A
12.7.3	Tests		N/A
12.7.3.2	Stress relief test		N/A
12.7.3.3	Battery replacement test		N/A
12.7.3.4	Drop test		N/A
12.7.3.5	Impact test		N/A
12.7.4	Battery not accessible; or not removable		N/A

13	CLEARANCES AND CREEPAGE DISTANCES <i>EUT supplied by Li-ion battery .</i>		N/A
13.1	Clearances in accordance with 13.3		N/A
	Creepage distances in accordance with 13.4		N/A
13.2	Determination of working voltage		
13.3	Clearances		N/A
13.3.1	Comply with 13.3 or Annex J		N/A
13.3.2	Circuits conductively connected to the mains comply with table 8 and, where applicable, table 9..... :		N/A
13.3.3	Circuits not conductively connected to the mains comply with table 10		N/A
13.3.4	Measurement of transient voltages		N/A
13.4	Creepage distances not less than appropriate table 11 minimum values		N/A
13.5	Printed boards		N/A
13.5.1	Conductors complying with pull-of and peel strength requirements, one of which may be conductively connected to the mains, as in fig. 10	No such printed boards	N/A
13.5.2	Type B coated printed circuit boards complying with IEC 60664-3 (basic insulation only)		N/A
13.6	Conductive parts along uncemented joints clearances and creepage distances comply with 13.3 and 13.4		N/A
	Conductive parts along reliably cemented joints comply with 8.8		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

	Temperature cycle test and dielectric strength test		N/A
	500V test for transformers, magnetic coupler and similar devices, if insulation is relied upon for safety		N/A
13.7	Enclosed, enveloped or hermetically sealed parts not conductively connected to the mains, clearances and creepage distances as in table 12		N/A
13.8	Parts filled with insulating compound, meeting the requirements of 8.8		N/A

14	COMPONENTS		P
14.1	Flammability according to IEC 60695-11-10 or annex G, or 20.2.5		N/A
14.2	Resistors		N/A
	Resistors separately approved	No such resistors.	N/A
	a) Resistors between hazardous live parts and accessible metal parts		N/A
	b) Resistors, other than between hazardous live parts and accessible parts		N/A
14.3	Capacitors and RC units		N/A
	Capacitors separately approved:		N/A
14.3.1	Damp heat test duration 21 days		N/A
14.3.2	Y capacitors tested to IEC 60384-14:2005		N/A
14.3.3	X capacitors tested to IEC 60384-14:2005		N/A
14.3.4	Capacitors operating at mains frequency but not connected to the mains: tests for X2		N/A
14.3.6	Capacitors with volume exceeding 1750 mm ³ , where short-circuit current exceeds 0,2 A: compliance with IEC 60384-1, 4.38 category B or better		N/A
	Capacitors with volume exceeding 1750 mm ³ , mounted closer to a potential ignition source than table 13 permits: compliance with IEC 60384-1, 4.38 category B or better		N/A
14.4	Inductors and windings		N/A
14.4.1	Comply with IEC 61558-1, IEC 61558-2 (as relevant) and clause 20.2.5		N/A
	Transformers and inductors separately approved ..		N/A
14.4.2	Transformers and inductors marked with manufacturer's name and type		N/A
14.4.3	General		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
	Insulation material complies with clause 20.2.5		N/A
14.4.4	Constructional requirements		N/A
14.4.4.1	Clearances and creepage distances comply with clause 13		N/A
14.4.4.2	Transformers meet the constructional requirements		N/A
14.4.5	Separation between windings		N/A
14.4.5.1	Class II transformers have adequate separation between hazardous live parts and accessible parts (double or reinforced insulation)		N/A
	Coil formers and partition walls > 0,4 mm		N/A
14.4.5.2	Class I transformers, with basic insulation and protective screening only if all 7 conditions are met		N/A
14.4.5.3	Separating transformers with at least basic insulation		N/A
14.4.6	Insulation between hazardous live parts and accessible parts		N/A
14.4.6.1	Class II transformers have adequate insulation between hazardous live parts and accessible parts (double or reinforced insulation)		N/A
	Coil formers and partition walls > 0,4 mm		N/A
14.4.6.2	Class I transformers have adequate insulation between hazardous live parts and accessible conductive parts or those conductive parts or protective screens connected to a protective earth terminal		N/A
	Winding wires connected to protective earth have adequate current-carrying capacity		N/A
14.5	High voltage components and assemblies (U > 4kV peak)		N/A
14.5.1	Component meets category V-1 of IEC 60695-11-10	No such components	N/A
14.5.2	High voltage transformers and multipliers		N/A
14.5.3	High voltage assemblies and other parts		N/A
14.6	Protective devices		N/A
14.6.1	Protective devices used within their ratings		N/A
	External clearances and creepage distances meet requirement of clause 13 for the voltage across the device when opened		N/A
14.6.2	Thermal releases		N/A
14.6.2.1	Comply with 14.6.2.2, 14.6.2.3 or 14.6.2.4		N/A
14.6.2.2	a) Thermal cut-outs separately approved		N/A
	b) Thermal cut-outs tested as part of the submission		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
14.6.2.3	a) Thermal links separately approved		N/A
	b) Thermal links tested as part of the submission		N/A
14.6.2.4	Thermal devices re-settable by soldering		N/A
14.6.3	Fuses and fuse holders		N/A
14.6.3.1	Fuse-links in the mains circuit according to IEC 60127		N/A
14.6.3.2	Correct marking of fuse-links adjacent to holder ... :		N/A
14.6.3.3	Not possible to connect fuses in parallel		N/A
14.6.3.4	Not possible to touch hazardous live parts when replacing fuse-links without the use of a tool :		N/A
14.6.4	PTC thermistors comply with IEC 60730-1:2010		N/A
	PTC devices (>15 W) category V-1 or better		N/A
14.6.5	Circuit protectors have adequate breaking capacity and their position is correctly marked		N/A
14.7	Switches		N/A
14.7.1 a)	Separate testing to IEC 61058-1 including: - 10 000 operations - Normal pollution suitability - For CRT TV's, make and break speed independent of speed of actuation - V-0 or compliance with G.1.1		N/A
14.7.1 b)	Tested in the apparatus		N/A
	Switch controlling > 0.2A with open contact voltage > 35 V (peak) / 24 V dc complying with 14.7.3, 14.7.4 and V-0 or G.1.1		N/A
	Switch controlling > 0.2A with open contact voltage < 35 V (peak) / 24 V dc complying with 14.7.3 and V-0 or G.1.1		N/A
	Switch controlling ≤ 0.2A with open contact voltage > 35 V (peak)/24 V dc complying with 14.7.4 and V-0 or G.1.1		N/A
14.7.2	Switch tested to 14.7.1 b) checked according to IEC 61058-1 clause 13.1 and 10 000 operation test		N/A
14.7.3	Switch tested to 14.7.1 b) compliant with IEC 61058-1 subclause 16.2.2 d) and m) not attaining excessive temperatures in use		N/A
14.7.4	Switch tested to 14.7.1 b) has adequate dielectric strength		N/A
14.7.5	Mains switch controlling mains socket outlets additional tests to IEC 61058-1		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
14.8	Safety interlocks according to 2.8 of IEC 60950-1	No safety interlock used	N/A
14.9	Voltage setting device and the like are not likely to be changed accidentally	No such device used	N/A
14.10	Motors		N/A
14.10.1	a) Endurance test on motors	No motor used.	N/A
	b) Motor start test		N/A
	Dielectric strength test		N/A
14.10.2	Not adversely affected by oil or grease etc.		N/A
14.10.3	Protection against moving parts		N/A
14.10.4	Motors with phase-shifting capacitors, three-phase motors and series motors meet clause. B.8, B.9 and B.10 of IEC 60950-1, Annex B		N/A
14.11	Batteries		P
14.11.1	Comply with IEC 62133 if applicable	Comply with IEC 62133.	P
	Batteries mounted with no risk of accumulation of flammable gases		P
14.11.2	No possibility of recharging user replaceable non-rechargeable batteries	Non-rechargeable able battery used.	N/A
14.11.3	Recharging currents and times within manufacturers limits	- Measured max. charge current under normal condition: 29mA - Measured max. charge current under fault condition: 36mA Charging current limit given by the battery manufacturer: 40mA	P
	Lithium batteries discharge and reverse currents within the manufacturers limits	- Measured Max. Discharge current: 31mA Discharging current limit given by the battery manufacturer: 40mA	P
14.11.4	Battery mould stress relief		N/A
14.11.5	Battery drop test		N/A
14.12	Optocouplers		N/A
	Comply with constructional requirements of clause 8		N/A
	External clearances and creepage comply with 13.1		N/A
	Compound completely filling the casing or internal clearances and creepage comply with 13.1 :		N/A
	a) Complies with 13.6 (jointed insulation) and N.3.2		N/A
	b) Complies with IEC 60747-5-5:2007		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

	c) Complies with 13.8		N/A
14.13	Surge suppression varistors		N/A
	Comply with IEC 61051-2		N/A
	Not connected between mains and accessible parts except for earthed parts of permanently connected apparatus		N/A
	GDT bridging basic insulation complies with electric strength and distance requirements		N/A
	Complies with the climatic, voltage, current pulse, fire hazard and thermal stress requirements of 14.13		N/A

15	Terminals <i>EUT supplied by Li-ion battery .</i>		N/A
15.1.1	Mains plug, appliance inlet, interconnection couplers and mains socket-outlet meet the appropriate standard	Considered in used Li-ion battery.	N/A
	Overloading of plugs or appliance inlets prevented if the apparatus has mains socket outlets	No mains socket outlets used	N/A
	Overloading of internal wiring prevented if the apparatus has mains socket outlets	No mains socket outlets used	N/A
15.1.2	Connectors for antenna, earth, audio, video or data:		P
	No risk of insertion in mains socket-outlets		P
	No risk of insertion into audio or video: outlets marked with the symbol of 5.2	No such outlets	N/A
15.1.3	Output terminals of a.c. adaptors or similar devices not compatible with household mains socket-outlets		N/A
15.2	Provision for protective earthing		N/A
	Accessible conductive parts of Class I equipment reliably connected to earth terminal, within equipment		N/A
	Protective earth conductors correctly coloured		N/A
	Equipment with non-detachable mains cord provided with separate protective earth terminal near mains input		N/A
	Protective earth terminal resistant to corrosion		N/A
	Earth resistance test: $< 0,1 \Omega$ at 25 A :		N/A
15.3	Terminals for external flexible cords and for permanent connection to the mains supply	Considered in used Li-ion battery.	N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
15.3.1	Adequate terminals for connection of permanent wiring	Not permanently connected equipment.	N/A
15.3.2	Reliable connection of non-detachable cords:	Considered in used Li-ion battery.	N/A
	Not soldered to conductors of a printed circuit board		N/A
	Adequate clearances and creepage distances between connections should a wire break away		N/A
	Wire secured by additional means to the conductor		N/A
15.3.3	Screws and nuts clamping conductors have adequate threads: ISO 261, ISO 262 or similar	No such screws and nuts used.	N/A
15.3.4	Soldered conductors wrapped around terminal prior to soldering or held in place by additional means		N/A
	Clamping of conductor and insulation if not soldered or held by screws		N/A
15.3.5	Terminals allow connection of appropriate cross-sectional area of conductors, for the rated current of the equipment		N/A
15.3.6	Terminals to 15.3.3 have sizes required by table 16		N/A
15.3.7	Terminals clamp conductors between metal and have adequate pressure	No screw or nut terminals provided.	N/A
	Terminals designed to avoid conductor slipping out when tightened or loosened		N/A
	Terminals adequately fixed to avoid loosening when the clamping is tightened or loosened and stress on internal wiring is avoided		N/A
15.3.8	Terminals carrying a current more than 0,2 A: contact pressure not transmitted by insulating material except ceramic		N/A
15.3.9	Termination of non-detachable cords: wires terminated near to each other		N/A
	Terminals located and shielded: test with 8 mm strand		N/A
15.4	Devices forming a part of the mains plug		N/A
15.4.1	No undue strain on mains socket-outlets		N/A
15.4.2	Device complies with standard for dimensions of mains plugs		N/A
15.4.3	Device has adequate mechanical strength (tests a,b,c)		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

16	External flexible cords <i>EUT supplied by Li-ion battery .</i>		N/A
16.1	Mains cords sheathed type, complying with IEC 60227 for PVC or IEC 60245 for synthetic rubber cords		N/A
	Non-detachable cords for Class I have green/yellow core for protective earth		N/A
16.2	Mains cords conductors have adequate cross-sectional area for rated current consumption of the equipment		N/A
16.3	a) Flexible cords not complying with 16.1, used for interconnections between separate units of equipment used in combination and carrying hazardous live voltages, have adequate dielectric strength	No such flexible cords	N/A
	b) Flexible cords not complying with 16.1, withstand bending and mechanical stress (3.2 of IEC 60227-2)	No such flexible cords	N/A
16.4	Flexible cords used for connection between equipment have adequate cross-sectional areas to avoid temperature rise under normal and fault conditions		N/A
16.5	Adequate strain relief on external flexible cords		N/A
	Not possible to push cord back into equipment		N/A
	Strain relief device unlikely to damage flexible cord		N/A
	For mains cords of Class I equipment, hazardous live conductors become taut before earth conductor		N/A
16.6	Apertures for external flexible cord: no risk of damage to the cord during assembly or movement in use		N/A
16.7	Transportable apparatus have appliance inlet according to IEC 60320-1 or means of stowage to protect the cord		N/A

17	Electrical connections and mechanical fixings <i>EUT supplied by Li-ion battery .</i>		P
17.1	Torque test to table 20:		P
	- screws into metal: 5 times		N/A
	- screws into non-metallic material: 10 times		P

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
17.2	Correct introduction into female threads in non-metallic material		N/A
17.3	Cover fixing screws: captive		N/A
	Non-captive fixing screws: no hazard when replaced by a screw whose length is 10 times its diameter		N/A
17.4	No loosening of conductive parts carrying a current > 0,2 A		N/A
17.5	Contact pressure not transmitted through plastic other than ceramic for connections carrying a current > 0,2 A	No contact pressure through insulating material.	N/A
17.6	Stranded conductors of flexible supply cords carrying a current > 0,2 A with screw terminals not consolidated by solder		N/A
17.7	Cover fixing devices other than screws have adequate strength and their positioning is unambiguous		N/A
17.8	Fixing devices for detachable legs or stands provided	No detachable legs or stands provided.	N/A
17.9	Internal pluggable connections, affecting safety, unlikely to become disconnected		P

18	MECHANICAL STRENGTH OF PICTURE TUBES AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
18.1	Comply with IEC 61965 or 18.2	No picture tube used	N/A
18.2	Non-intrinsically protected tubes		N/A

19	STABILITY AND MECHANICAL HAZARDS		P
19.1	Apparatus > 7kg have adequate stability or is required to be fastened in place and provided with the warning of 5.5.2 f)	Less than 7Kg	N/A
19.2	Test at 10° to the horizontal		N/A
19.3	Vertical force test 100 N applied downwards		N/A
19.4	Horizontal force test, 100 N or 13% of weight, applied horizontally to point of least stability		N/A
19.5	Edges or corners not hazardous	Edges and corners are smooth and round	P
19.6	Mechanical strength of glass		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
19.6.1	Glass surfaces (exc.laminated) with an area exceeding 0,1 m ² or major dimension > 450 mm, pass the test of 12.1.4	No such glass	N/A
19.6.2	Fragmentation test		N/A
19.7	Wall or ceiling mounting means		N/A
19.7.1 - 19.7.3	Not dislodged and remain mechanically intact after test according to 19.7.2 Test 1, Test 2 or Test 3..... :		N/A

20	RESISTANCE TO FIRE		P
20.1	Start and spread of fire is prevented		P
20.2	Electrical components and mechanical parts		P
20.2.1	a) Exemption for components contained in an enclosure of material V-0 to IEC 60695-11-10 with openings not exceeding 1 mm in width		N/A
	b) Exemption for small components		P
20.2.2	Electrical components meet the requirements of Clause 14 or 20.2.5		P
20.2.3	Insulation of internal wiring working at voltages > 4 kV or leaving an internal fire enclosure, or located within the areas mentioned in Table 21, comply with G.2	No working voltages > 4 kV	N/A
20.2.4	Material of printed circuit boards on which the available power exceeds 15 W at a voltage between 50 V and 400 V (peak) a.c. or d.c. meets V-1 or better to IEC 60695-11-10 or VTM-1 or better according to ISO 9773, unless used in a fire enclosure	V-1 for PCB	P
	Material of printed circuit boards on which the available power exceeds 15 W at a voltage >400 V (peak) a.c. or d.c. meets V-0 to IEC 60695-11-10 or VTM-1 or better according to ISO 9773.	V-1 for PCB	P
20.2.5	Components and parts not covered by 20.1.1, 20.1.2 and 20.1.3 (other than fire enclosures) mounted nearer to a potential ignition source than the distances in Table 21 comply with the relevant flammability category in Table 21	(see appended table 14)	P
	Components and parts as above but shielded from a potential ignition source, with the barrier area in accordance with Table 21 and fig. 13	See above	N/A
	Apparatus with voltages >4kV under normal operating conditions and distances to the enclosure exceed those specified Table 21, flammability classification HB40 or better is required for the enclosure		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict

20.3	Fire enclosure		N/A
20.3.1	Potential ignition sources with open circuit voltage > 4 kV (peak) a.c. or d.c. contained in a fire enclosure to V-1	No such potential ignition sources	N/A
20.3.2	Internal fire enclosures with openings not exceeding 1 mm in width and with openings for wires completely filled		N/A
20.3.3	Requirements of 20.2.1 and 20.2.2 met by an internal fire enclosure		N/A

ANNEX A	ADDITIONAL REQUIREMENTS FOR APPARATUS WITH PROTECTION AGAINST SPLASHING WATER		N/A
A.5	Marking and instructions		N/A
A.5.1	A.5.2 i) Marked with at least IPX4 (IEC 60529) 5.5.2 a) does not apply		N/A
A.10	Insulation requirements		N/A
A.10.3	Splash and humidity treatment		N/A
A.10.3.1	The enclosure provide adequate protection against splashing water		N/A
A.10.3.2	Complies with 10.3,duration of the test is 168h		N/A

ANNEX B	APPARATUS TO BE CONNECTED TO TELECOMMUNICATION THE TELECOMMUNICATION NETWORKS		N/A
	Complies with IEC 62151 clause 1		N/A
	Complies with IEC 62151 clause 2		N/A
	Complies with IEC 62151 clause 3 modified		N/A
	Complies with IEC 62151 clause 4 modified		N/A
	Complies with IEC 62151 cause 5 modified		N/A
	Complies with IEC 62151 clause 6		N/A
	Complies with IEC 62151 clause 7		N/A
	Complies with IEC 62151 annex A, B and C		N/A

ANNEX L	ADDITIONAL REQUIREMENTS FOR ELECTRONIC FLASH APPARATUS FOR PHOTOGRAPHIC PURPOSES		N/A
L.5	Marking and instructions		N/A
L.5.5.1	Instructions for battery chargers and Supply apparatus indicating type or model number of flash apparatus with which it is to be used		N/A

EN60065			
Clause	Requirement – Test	Result - Remark	Verdict
	Instructions for flash apparatus indicating type or model number of battery chargers or Supply apparatus with which it is to be used		N/A
L.7	Heating under normal operating conditions		N/A
L.7.1.6	Lithium batteries meet permissible temp rise in Table 3		N/A
L.9	Electric shock hazard under normal operating conditions		N/A
L. 9.1.1.1	Terminals for connection to synchroniser not hazardous live		N/A
L.14	Components		N/A
L.14.6.7	Mains switch characteristics appropriate to its function under normal conditions		N/A

ATTACHMENT TO TEST REPORT IEC 60065				
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES				
(Audio, video and similar electronic apparatus – Safety requirements)				
Differences according to: EN60065: 2014				
Attachment Form No.: EU_GD_IEC60065L				
Attachment Originator.....: Intertek Semko AB				
Master Attachment.....: Date 2015-03				
Copyright © 2015 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.				
	CENELEC COMMON MODIFICATIONS (EN)			--
General	1.1.3 Note 2	5.4 Note	5.5.2 Note 1 and Note 2	--
	13.3.1 Note 4	14.1 Note 1 and Note 2	15.1.1 Note 1 and Note 2	
	15.2 Note 2	16.1 Note 2	16.2 Note	
	20 Note	J.3 Note 1 and Table J.1 Note 2		
1.2	Normative references			--
	Add the following: EN 71-1, Safety of toys – Part 1: Mechanical and physical properties EN 50332-1, Sound system equipment: Headphones and earphones associated with personal music players – Maximum sound pressure level measurement methodology – Part 1: General method for "one package equipment" EN 50332-2, Sound system equipment: Headphones and earphones associated with personal music players – Maximum sound pressure level measurement methodology – Part 2: Matching of sets with headphones if either or both are offered separately, or are offered as one package equipment but with standardised connectors between the two allowing to combine components of different manufacturers or different design			--

Table

3	General requirements		N/A
3.Z1	<p>Protective devices</p> <p>To protect against excessive current, short-circuits and earth faults in MAINS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of Clause 11 shall be included as parts of the equipment;</p> <p>b) for components in series or parallel with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for equipment supplied via an industrial mains plug or for PERMANENTLY CONNECTED APPARATUS, to rely on dedicated over current and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for apparatus not supplied via an industrial mains plug or for PERMANENTLY CONNECTED APPARATUS the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N/A
4	General test conditions		N/A
4.1.1	<p>Replace the text of the note by:</p> <p>NOTE For ROUTINE TEST, reference is made to EN 50514:2008.</p>		N/A

Table

6	Hazardous radiations		N/A
6.1	<p>Replace the entire subclause by the following: Apparatus including a potential source of ionizing radiation shall be so constructed that personal protection against ionizing radiation is provided under normal operating conditions and under fault conditions. Compliance is checked by measurement under the following conditions: In addition to the normal operating conditions, all controls adjustable from the outside BY HAND, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made. NOTE 1 Soldered joints and paint lockings are examples of adequate locking. The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made. The dose-rate shall not exceed 1 µSv/h (0,1 mR/h) taking account of the background level. NOTE 2 These values appear in Council Directive 96/29/Euratom of 13 May 1996. A picture is considered to be intelligible if the following conditions are met: - a scanning amplitude of at least 70 % of the usable screen width; - a minimum luminance of 50 cd/m² with locked blank raster provided by a test generator; - a horizontal resolution corresponding to at least 1,5 MHz in the centre, with a similar vertical degradation; - not more than one flashover per 5 min.</p>		N/A
16	External flexible cords		N/A
16.1	<p>Add the following note after the first paragraph: NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A

Z1	Protection against excessive sound pressure from personal music players		P
Z1.1	<p>General This subclause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment for personal use, that:</p>		P


Table

	<p>– is designed to allow the user to listen to recorded or broadcast sound or video; and</p> <p>– uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and</p> <p>– is body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around while in use.</p> <p>EXAMPLES CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player shall comply with the requirements of this subclause.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom terminal equipment is referenced to ITU-T Recommendation P.360.</p> <p>The requirements in this subclause are valid for music or video mode only.</p> <p>The requirements do not apply to:</p> <p>– professional equipment;</p> <p>NOTE 2 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <p>– hearing aid equipment and other devices for assistive listening;</p> <p>– the following types of analogue personal music players:</p> <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or a world band radio receiver, an AM radio receiver) and • cassette player/recorder; <p>NOTE 3 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>– player while connected to an external amplifier that does not allow the user to walk around while in use.</p> <p>For equipment clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		
Z1.2	<p>Equipment requirements</p> <p>No safety provision is required for equipment that complies with the following:</p> <p>– equipment provided as a package (personal music player with its listening device), where the acoustic output $L_{Aeq,T} \leq 85$ dB(A) measured while playing the fixed “programme simulation noise” as described in EN 50332-1; and</p> <p>– personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” as described in EN 50332-1.</p> <p>NOTE 1 Wherever the term acoustic output is used</p>		P

Table

<p>in this subclause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Z1.5 and Annex ZE.</p> <p>All other equipment shall:</p> <ul style="list-style-type: none"> a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <ul style="list-style-type: none"> d) have a warning as specified in Z1.3; and e) not exceed the following: <ul style="list-style-type: none"> 1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dB(A) measured while playing the fixed "programme simulation noise" described in EN 50332-1; and 2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the basic limit of 85 dB(A). In this case, T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dB(A).</p> <p>NOTE 5 For example, if the player is set with the programme simulation noise to 85 dB(A), but the</p>		
---	--	--

Table

	average music level of the song is only 65 dB(A), there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB(A).		
Z1.3	<p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> – the symbol of Figure Z1 with a minimum height of 5 mm; and – the following wording, or similar: <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> To prevent possible hearing damage, do not listen at high volume levels for long periods. </div>  <p>Figure Z1 – Warning label (IEC 60417-6044)</p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		P
Z1.4	Requirements for listening devices (headphones, earphones, etc.)		P
Z1.4.1	<p>Corded passive listening devices with analogue input</p> <p>With 94 dB(A) sound pressure output LAeq,T, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be ≥ 75 mV. This requirement is applicable in any mode where the headphones can operate including any available setting (for example built-in volume level control, an additional sound feature like equalization, etc.).</p> <p>NOTE The values of 94 dB(A) – 75 mV correspond with 85 dB(A) – 27 mV and 100 dB(A) – 150 mV.</p>		P
Z1.4.3	<p>Cordless listening devices</p> <p>In wireless mode:</p> <ul style="list-style-type: none"> – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above-mentioned programme simulation noise, the acoustic output LAeq,T of the listening device shall be ≤ 100 dB(A). 		N/A

Table

Z1.5	Measurement methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s. NOTE Test method for cordless equipment provided without listening device should be defined.		P
	ANNEXES		N/A
Annex B	Replace the text of Note 1 by the following: In the CENELEC countries listed in IEC 62151, special national conditions apply.		N/A
Annex N	After the note in N.1, add the following: For ROUTINE TEST, reference is made to EN 50514:2008.		N/A
ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
2.6.1	Denmark The following is added: Certain types of Class I apparatus, see 15.1.1, may be provided with a plug not establishing earthing continuity when inserted in Danish socket-outlets Justification: Heavy Current Regulations, Section 6c		N/A
3.Z1	Denmark Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. Justification: In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		N/A

Table

5.4	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: CLASS I apparatus which is intended for connection to the building installation wiring via a plug or an appliance coupler, or both and in addition is intended for connection to other apparatus or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network TERMINALS and ACCESSIBLE parts, have a marking stating that the apparatus must be connected to an earthed MAINS socket-outlet. The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>	Should be evaluated during national approval	N/A
5.5.2	<p>Norway and Sweden</p> <p>Add to the end of 5.5.2 (after the compliance statement) the following: The screen of the coaxial cable of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a coaxial cable based television distribution system. It is however accepted to provide the insulation external to the apparatus by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the apparatus is intended to be used in: "Apparatus connected to the protective earthing of the building installation through the MAINS connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)"</p> <p>NOTE In Norway, due to regulation for installations of CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also</p>	Should be evaluated during national approval	N/A


Table

	<p>be accepted in Norway): "Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel-TV nettet." Translation to Swedish: "Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet."</p>		
13.3.1	<p>Norway Add to the second paragraph the following: Due to the IT power distribution system used, the a.c. MAINS supply voltage is considered to be equal to the line-to-line voltage, and will remain 230 V in case of a single earth fault. Justification: Based on a use in Norway of an IT power distribution system where the neutral is not provided</p>		N/A

Table

15.1.1	<p>Denmark</p> <p>To the first paragraph the following is added: In Denmark, supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>Appliances of Class I provided with socket-outlets with earth contact or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug which assure earth continuity with the socket-outlet in accordance with DS 60884-2-D1.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-1.</p> <p>To the second paragraph the following is added: Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>To the third paragraph the following is added: Mains socket-outlets with earthing contact shall be in compliance with DS 60884-2-D1, Standard sheet DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a</p> <p>Justification: Heavy Current Regulations, Section 6c</p>		N/A
15.1.1	<p>Ireland</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997.</p> <p>Justification: SI 525: 1997</p>		N/A

Table

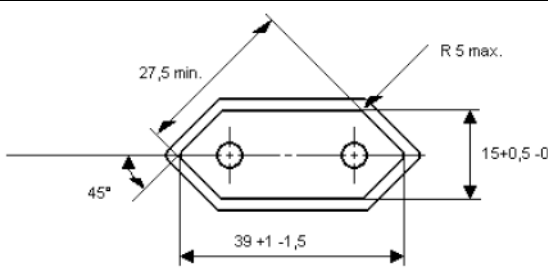15.1.1	<p>Norway Mains socket-outlets mounted on Class II apparatus shall comply with the specifications given in CEE Publ. 7 as far as applicable, with the following amendments: § 8 Dimensions a) 2,5 A 250 V two-pole socket-outlets for electronic apparatus shall comply with the enclosed Standard Sheet I.</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <p>STANDARD SHEET I</p> <p>2,5 A/250 V SOCKET-OUTLET FOR ELECTRONIC APPLIANCES OF CLASS II</p>  <p>Dimensions in mm Other dimensions according to CEE Publication 7 Standard Sheet I "Portable Single-Way Socket-Outlets".</p> </div> <p>§ 24 Mechanical strength a) 2,5 A, 250 V socket-outlets for Class II electronic apparatus are tested as specified in EN 60065:2014, 12.1.3. Also the protecting rim shall be tested. Justification: Act of 24 May 1929 relating to supervision of electrical installation (TEA 1929/FEL 1998).</p>		N/A
15.1.1	<p>United Kingdom Apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug shall be fitted with a "standard plug" in accordance with Statutory Instrument 1768: 1994: The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those Regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug. Justification: SI 1768: 1994</p>		P
Annex B	<p>Finland, Norway and Sweden All sub clauses given below are sub clauses of IEC 62151 (ref. corrigenda 1 and 2 to IEC 62151). Subclause 4.1.1 (corrigendum 2): Add after the first paragraph: NOTE In Finland, Norway and Sweden, CLASS I equipment which is intended for connection to the building installation via a non-industrial plug or a non-industrial appliance coupler, or both and in</p>		N/A

Table

<p>addition is intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and ACCESSIBLE parts, has a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Finland: " Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan "</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p> <p>Subclause 4.1.4 (corrigendum 1) Add at the end of the subclause: NOTE In Norway, for requirements see 4.1.1, note and 5.3.1, note 1.</p> <p>Subclause 4.2.1.2 (corrigendum 1) Add at the end of the subclause: NOTE 3 In Norway, for requirements see 5.3.1, note 1.</p> <p>Subclause 4.2.1.3 (corrigendum 2) Add at the end of the subclause: NOTE In Norway, for requirements see 4.1.1, note and 5.3.1, note 1.</p> <p>Subclause 4.2.1.4 (corrigendum 1) Number the existing note as NOTE 1 and add at the end of the subclause the following NOTE 2: NOTE 2 In Norway, for requirements see 4.1.1, note and 5.3.1, note 1.</p> <p>Subclause 5.3.1 (corrigendum 1) Add after the first test specifications paragraph: NOTE 1 In Finland, Norway and Sweden, there are additional requirements for the insulation. Renumber the existing note as NOTE 2. For additional requirements for the insulation in Finland, Norway and Sweden in NOTE 1 the following text is added between the first and the second paragraph (this text is identical to the corresponding EN 60950-1:2001): NOTE 1 In Finland, Norway and Sweden, if this insulation is solid, including insulation forming part of a component, it shall at least consist of either • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the</p>		
--	--	--

Table

	<p>component passes the electric strength test in the accordance with the compliance clause below and in addition:</p> <ul style="list-style-type: none"> • passes the test and inspection criteria of 13.6 with an electric strength test of 10.3 using the test voltage of 1,5 kV multiplied by 1,6, and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV (for performance of the test see N.2.1). <p>It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 132400:1994, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in IEC 62151:2000, 6.2.1; • the additional testing shall be performed on all the test specimens as described in EN 132400; • the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 in the sequence of tests as described in EN 132400. <p>Subclause 5.3.2 (corrigendum 1) Add after the fourth dash: NOTE In Finland, Norway and Sweden, exclusions are applicable for equipment which is intended for connection to the building installation wiring using screw terminals or other reliable means, and for equipment which is intended for connection to the building installation wiring via an industrial plug and socket -outlet or an appliance coupler, or both, complying with EN 60309 or with a comparable national standard.</p>		
J.2	<p>Norway After Table J.1 the following is added: Due to the IT power distribution system used, the a.c. MAINS supply voltage is considered to be equal to the line-to-line voltage, and will remain 230 V in case of a single earth fault. Justification: Based on a use in Norway of an IT power distribution system where the neutral is not provided</p>		N/A

Table

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)	N/A
5.1	<p>Italy</p> <p>The following requirements shall be fulfilled:</p> <ul style="list-style-type: none"> - The power consumption in Watts (W) shall be indicated on TV receivers and in their instruction for use (Measurement according to IEC 60107-1) <p>NOTE EN 60555-2 has since been replaced by IEC 60107-1:1997.</p> <ul style="list-style-type: none"> - TV receivers shall be provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language. - Marking for controls and terminals shall be in Italian language. Abbreviation and international symbols are allowed provided that they are explained in the instruction for use. - The ECC manufacturers are bound to issue a conformity declaration according to the above requirements in the instruction manual. The correct statement for conformity to be written in the instruction manual, shall be: Questo apparecchio è fabbricato nella CEE nel rispetto delle disposizioni del D.M. marzo 1992 ed è in particolare conforme alle prescrizioni dell'art. 1 dello stesso D.M. - The first importers of TV receivers manufactured outside EEC are bound to submit the TV receivers for previous conformity certification to the Italian Post Ministry (PP.TT). The TV receivers shall have on the backcover the certification number in the following form: D.M. 26/03/1992 xxxxx/xxxxx/S or T or pT S for stereo T for teletext pT for retrofittable teletext <p>Justification: Ministerial Decree of 26 March 1992: National rules for television receivers trade. NOTE The ministerial decree above contains additional, but not safety relevant requirements.</p>	N/A
6.1	<p>Germany</p> <p>The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p>Justification: German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the Council Directive 96/29/Euratom in Germany.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>	N/A

Table

14.1	Sweden The following requirements shall be fulfilled: Switches containing mercury such as thermostats, relays and level controllers are not allowed.		N/A
------	---	--	-----

Table

7.1		TABLE: Heating Test						P
		Ambient (°C)				See below		—
		Loudspeaker impedance (Ω)				16Ω		—
Cond.	U _n (V)	Hz	I _n (A)	P _n (W)	U _{out} (V)	P _{out} (W)	Operating Condition / Status	
1.	5Vdc	--	0.089	0.445	--	--	Charging mode with empty battery of earphone	
2.	3.7Vdc	--	0.023	0.078	--	--	Discharging mode with full battery of earphone	
Test condition No.					No. 1 (5Vdc)		No.2 (Battery 3.7Vdc)	—
Monitored point:					dT(K)		dT(K)	Limit dT(K)
1. PCB near U1					5.3		5.7	85
2. PCB near U2					10.3		12.5	85
3. Battery wire					3.4		3.9	45
4. Battery body					6.2		6.9	--
5. Plastic enclosure inside near U1					3.6		4.1	--
6. Plastic enclosure outside near U1					2.4		3.2	60
7. Button					1.1		1.2	50
8. Ambient					25.9°C		25.6°C	--
	Winding temperature rise measurements							--
	Ambient temperature t1 (°C).....:					--		--
	Ambient temperature t2 (°C).....:					--		--
Temperature rise dT of winding:				R1 (Ω)	R2 (Ω)	dT (K)	Required dT (K)	Insulation class
--				--	--	--	--	--

11 TABLE: Fault Conditions							P
Voltage (V) 0,9 or 1,1 times rated voltage					See below		—
Ambient temperature (°C) :					See below		—
No.	Component no.	Fault	Test voltage (V)	Test time	Fuse no.	Input current (A)	Result
1.	Speaker	100% of max. non-clipped output power	3.7Vdc	1hr 56mins	--	0.033	Working as normal, no hazards.
							1. PCB near U1: 15.6K
							2. Battery body: 7.6K
							3. Enclosure outside near U1: 3.7K
							Limited: PCB: 110K Winding: 150K Enclosure output: 65K

Table

2.	Speaker	S-C	3.7Vdc	1hr 47mins	--	0.023→ 0.016	Working as normal, no hazards.
							1. PCB near U1: 5.8K
							2. Battery body: 4.9K
							3. Enclosure outside near U1: 2.1K
							Limited: PCB: 110K Winding: 150K Enclosure output: 65K
3.	U2(4-3)	S-C	5Vdc	10mins	--	0.01	Unit shut down, no hazards, no damaged.
4.	U1(14-15)	S-C	3.7Vdc	10mins	--	0.01	Unit shut down, no hazards, no damaged.
<p>Note(s):1. S-C means short circuit. Component faults and overload applied to parts of power supply board.</p> <p>2. All faults are started during normal operation unless otherwise stated.</p>							

14	TABLE: list of critical components and materials					P
Object/part No.	Manufacturer/ trademark	Type/ model	Technical data	Standard	Mark(s) of conformity	
Lithium battery pack	ShenZhen Yutongxinyuan Electronic Co., Ltd.	401215PL	3.7Vdc, 40mAh, 0.148Wh	IEC62133	CB	
Battery wire	Interchangeable	Interchangeable	300V, 80°C, Min.28AWG, VW-1	UL 758	--	
Plastic enclosure	Interchangeable	Interchangeable	Min. HB, 60°C	UL 94	UL	
PCB	Interchangeable	Interchangeable	V-1or better, 130°C	UL 94	UL	
Speaker	Interchangeable	Interchangeable	66 Ω, 3mW	--	--	
Note(s): An asterisk indicates a mark which assures the agreed level of surveillance.						



Fig1.Over view

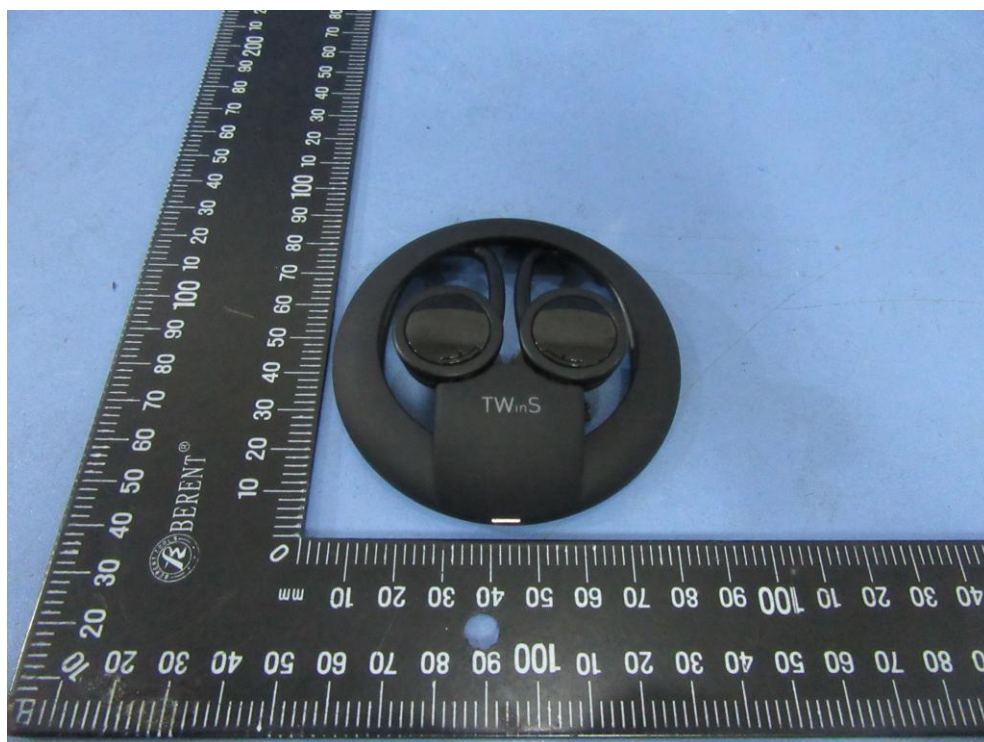


Fig2.Over view

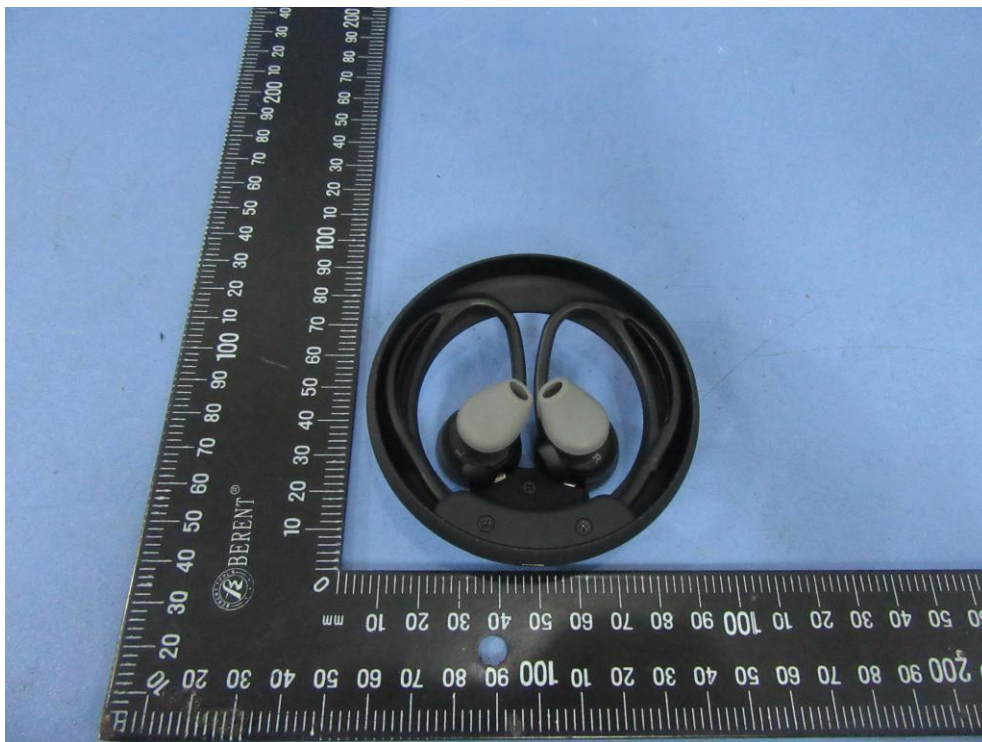


Fig3.Over view



Fig4.Over view

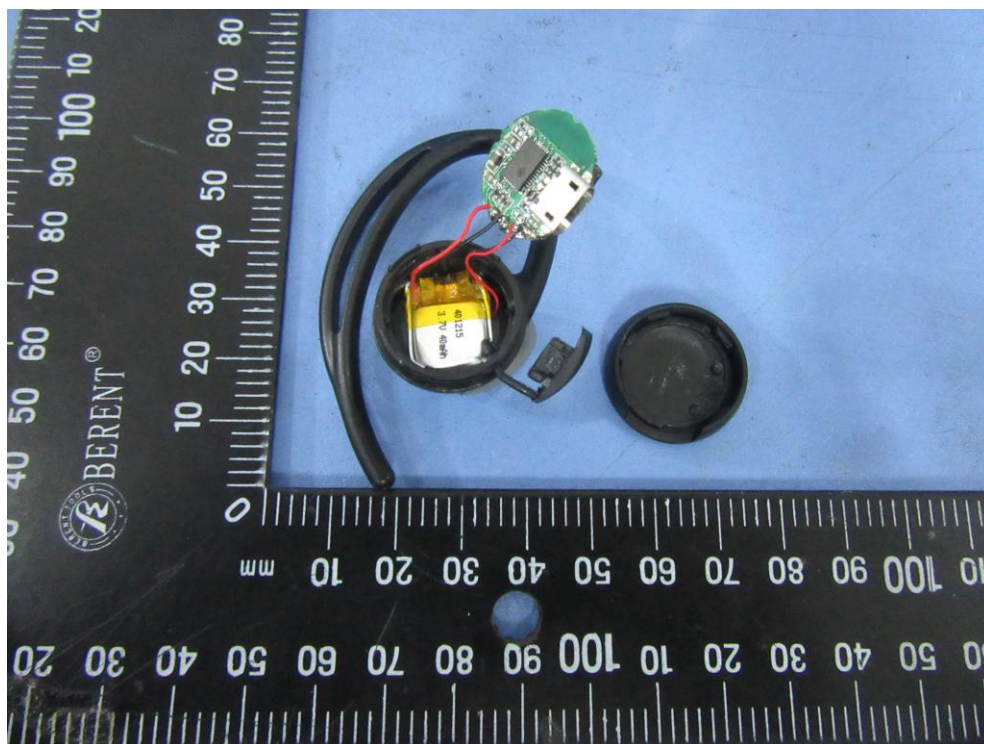


Fig5.internal view

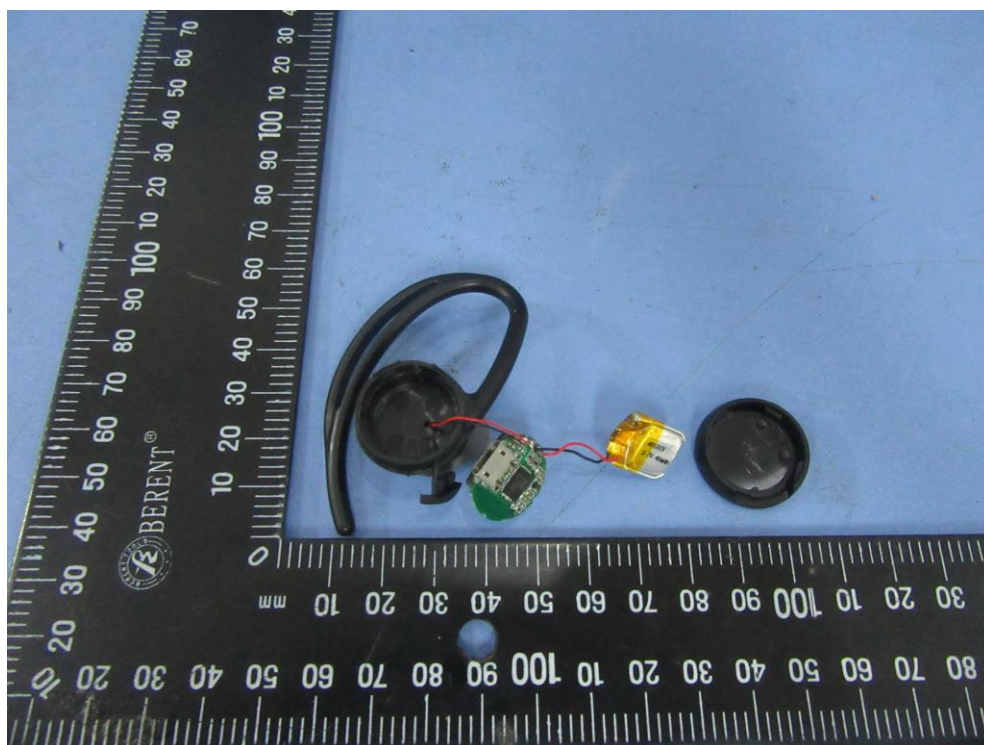


Fig6.internal view

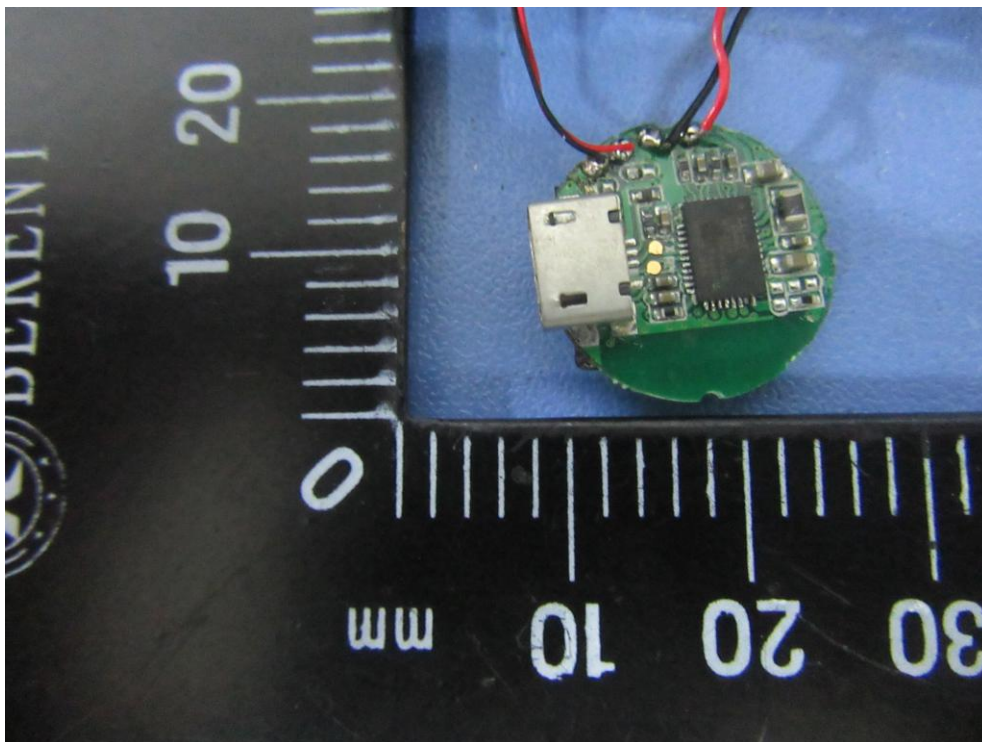


Fig7. Main board over view

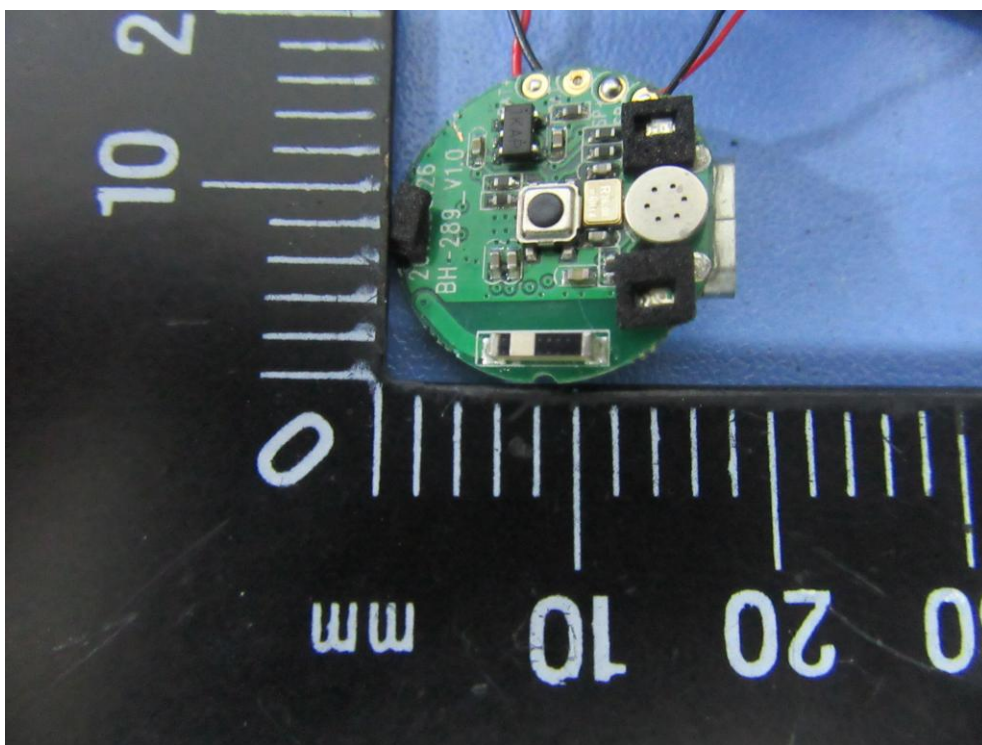


Fig8. Main board over view

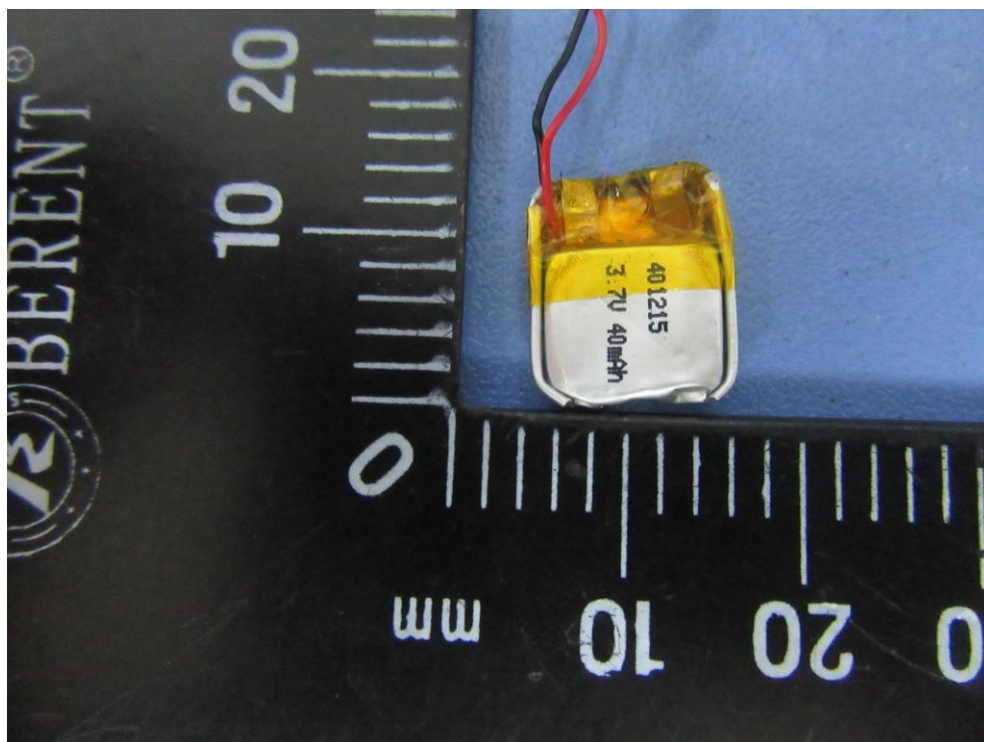


Fig9. Battery

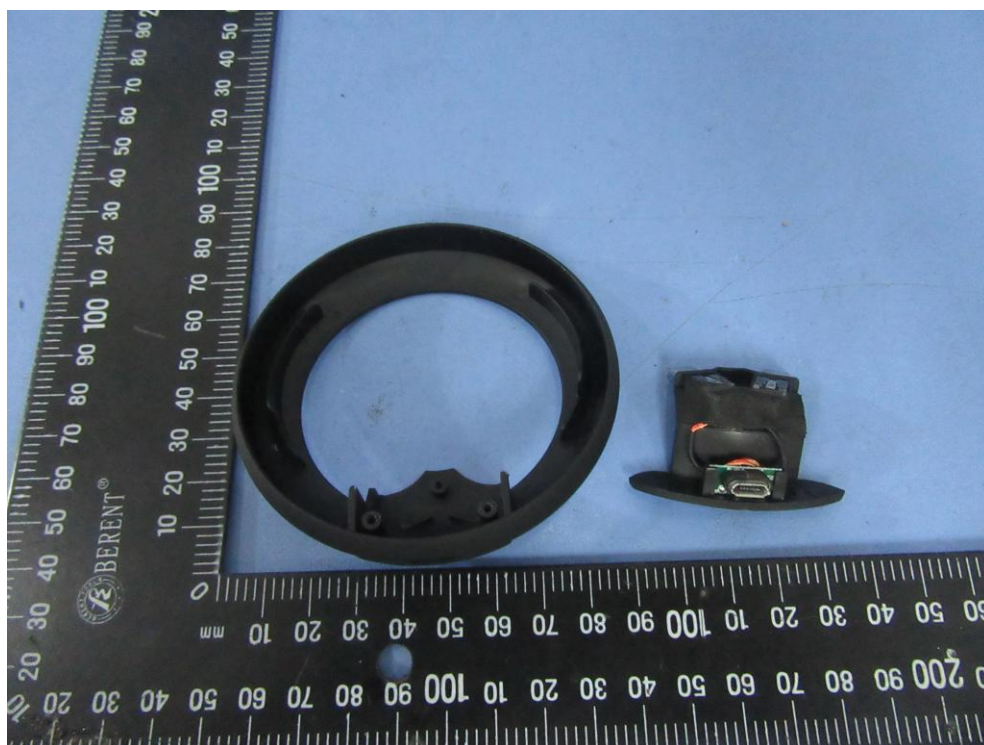


Fig10. Internal view

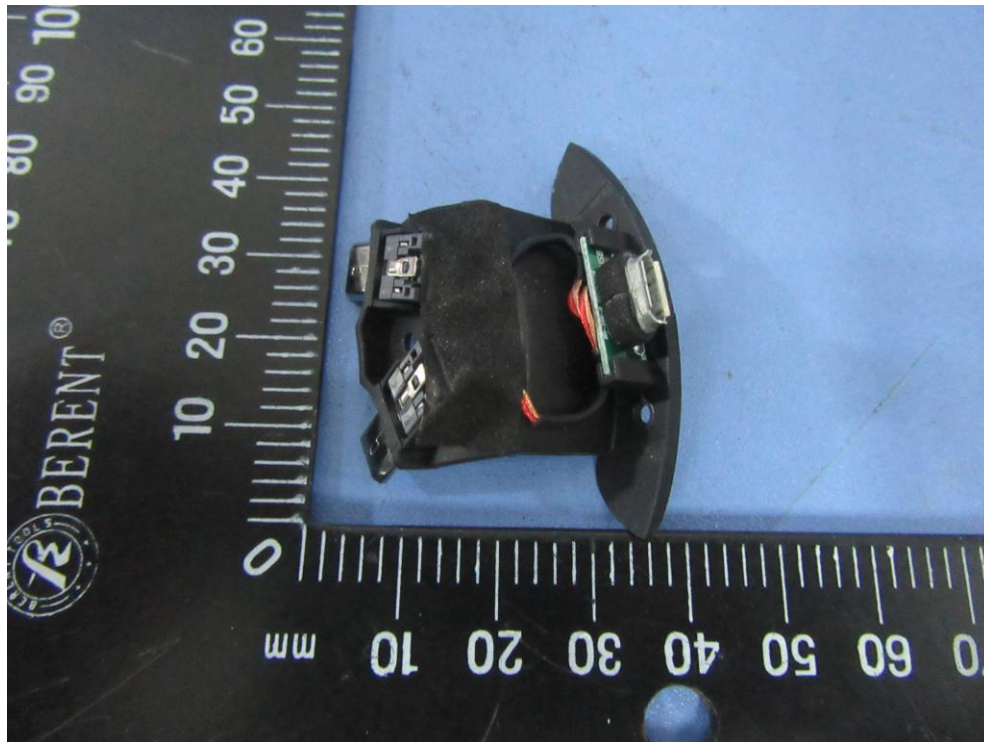


Fig11. Internal view