

APPLICATION FOR IEC REPORT
On Behalf of
Shenzhen Jin yu zhou Energy Co., Ltd.
Polymer Li-ion Cell
Model: 501035

Prepared For : Shenzhen Jin yu zhou Energy Co., Ltd.
A Building Two Layer, Jin Herui Industrial Area, Tang Qian
Cun, Guanlan, Longhua New District, Shenzhen

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
East of 4/F., Building A, Hourui No.3 Industrial Zone,
Xixiang Street, Bao'an District, Shenzhen, Guangdong,
China
Tel: (86)755-26066061
Fax: (86)755-26066021

Date of Test: Sep. 02, 2016 to Sep. 19, 2016
Date of Report: Sep. 19, 2016
Report Number: R011609063S

TEST REPORT	
IEC 62133:2012	
Secondary cells and batteries containing alkaline or other non-acid electrolytes — Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications	
Report	
Reference No.....	R011609063S
Compiled by (+ signature).....	Vinson Wu / Project Engineer <i>Vinson Wu</i>
Approved by (+ signature).....	Mark Zhu / Project Manager <i>Mark Zhu</i>
Date of issue.....	Sep. 19, 2016
Contents.....	25 pages(including 2 pages of photos)
Testing laboratory	
Name.....	Shenzhen Anbotek Compliance Laboratory Limited
Address.....	East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
Testing location.....	Shenzhen Anbotek Compliance Laboratory Limited
Client	
Name.....	Shenzhen Jin yu zhou Energy Co., Ltd.
Address.....	A Building Two Layer, Jin Herui Industrial Area, Tang Qian Cun, Guanlan, Longhua New District, Shenzhen
Test specification	
Standard.....	IEC 62133: 2012
Test procedure	Compliance with IEC 62133: 2012
Procedure deviation.....	N.A.
Non-standard test method.....	N.A.
Test item	
Description.....	Polymer Li-ion Cell
Trademark.....	N.A.
Model and/or type reference.....	501035
Serial number.....	N.A.
Manufacturer.....	Shenzhen Jin yu zhou Energy Co., Ltd.
Address.....	A Building Two Layer, Jin Herui Industrial Area, Tang Qian Cun, Guanlan, Longhua New District, Shenzhen
Rating(s).....	DC 3.7V, 135mAh



Particulars: test item vs. test requirements

Ambient temperature..... : 20 °C ± 5 °C.

Battery capacity..... : 135mAh

Test case verdicts

Test case does not apply to the test object..... : N(.A.)

Test item does meet the requirement..... : P(ass)

Test item does not meet the requirement..... : F(ail)

Testing

Date of receipt of test item : Sep. 02, 2016

Date(s) of performance of test..... : Sep. 02, 2016 to Sep. 19, 2016

General remarks

This test report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item tested.

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a dot is used as the decimal separator.

Comments:

1. If no otherwise specified, all tests performed at the model: 501035

2. Details information for the cell of model 501035, as following:

Dimension: L*W*H(mm): 35.05*11.36*4.69

Weight: 2.9041g

General product information with one lithium-ion cell(1S1P),and has overcharge,over discharge, over current and short-circuits proof circuit.

The main features of the battery are show as below(clause 8.1.1)

The main features of the battery are show as below(clause 8.1.2)

The main features of the cell in the battery are show as below(clause 8.1.1)

Model	Nominal Capacity	Nominal Voltage	Nominal Charge Current	Nominal Discharge Current	Max. Charge Current	Max. Discharge Current	Max. Charge Voltage	Cut-off Voltage
501035	135mAh	3.7V	67.5mA	67.5mA	135mAh	135mAh	4.2V	3.0V

The main features of the cell in the battery are show as below(clause 8.1.2)

Model	Upper limit Charge Voltage	Taper-off Current	Lower Charge temperature	Upper Charge temperature
501035	4.25	6.75mA	10℃	45℃

Copy of marking:

Polymer Li-ion Cell

Model number: 501035

ICP5/12/35

3.7Vdc, 135mAh, 0.4995Wh

Red Wire(+), Black Wire(-),

Shenzhen Jin yu zhou Energy Co., Ltd.

2016.08.01

CAUTION

- Do not disassemble or modify
- Do not short-circuit
- Do not dispose in fire
- Do not expose to high temperature

4	Parameter measurement tolerances		--
	Parameter measurement tolerances		P

5	General safety considerations		--
5.1	General		P
5.2	Insulation and wiring		--
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N
	Insulation resistance (MΩ)..... :	> 5 MΩ	N
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		--
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition		N
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N
5.4	Temperature/voltage/current management		--
	Batteries are designed such that abnormal temperature rise conditions are prevented		N
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		N
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified		N
5.5	Terminal contacts		--
	Terminals have a clear polarity marking on the external surface of the battery		N

	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		N
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		N
	Terminal contacts are arranged to minimize the risk of short circuits		N
5.6	Assembly of cells into batteries		--
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N
	Each battery has an independent control and protection		N
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N
	Protective circuit components are added as appropriate and consideration given to the end-device application		N
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N
5.6.2	Design recommendation for lithium systems only		--
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or		P
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N

	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N
5.7	Quality plan		--
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery		P

6	Type test conditions		--
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	According to Table 2 of the standard. Less than six months	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	The tests are conducted in an ambient of 20°C ± 5°C	P

7	Specific requirements and tests (nickel systems)		--
7.1	Charging procedure for test purposes		N
7.2	Intended use		--
7.2.1	Continuous low-rate charging (cells)		--
	Results: No fire. No explosion		N
7.2.2	Vibration		--
	Results: No fire. No explosion. No leakage		N
7.2.3	Moulded case stress at high ambient temperature		--

	Oven temperature (°C).....		N
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N
7.2.4	Temperature cycling		--
	Results: No fire. No explosion. No leakage.		N
7.3	Reasonably foreseeable misuse		--
7.3.1	Incorrect installation cell		--
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N
	- A stabilized dc power supply.		N
	Results: No fire. No explosion.....		N
7.3.2	External short circuit		--
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		N
	Results: No fire. No explosion.....		N
7.3.3	Free fall		--
	Results: No fire. No explosion.		N
7.3.4	Mechanical shock (crash hazard)		--
	Results: No fire. No explosion. No leakage.		N
7.3.5	Thermal abuse		--
	Oven temperature (°C).....		N
	Results: No fire. No explosion.		N
7.3.6	Crushing of cells		--
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N
	Results: No fire. No explosion.....		N
7.3.7	Low pressure		--
	Chamber pressure (kPa).....		N

	Results: No fire. No explosion. No leakage.		N
7.3.8	Overcharge		--
	Results: No fire. No explosion..... :		N
	No fire, no explosion.		N
7.3.9	Forced discharge		--
	Results: No fire. No explosion..... :		N

8	Specific requirements and tests (lithium systems)		--
8.1	Charging procedures for test purposes		--
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		--
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit		P
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		P
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4.25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly		P
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		P
8.2	Intended use		--
8.2.1	Continuous charging at constant voltage (cells)		--
	Results: No fire. No explosion..... : (See Table 8.2.1)		P
8.2.2	Moulded case stress at high ambient temperature (battery)		--
	Oven temperature (°C)..... 70°C for 7 hours		N
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N
8.3	Reasonably foreseeable misuse		--
8.3.1	External short circuit (cell)		--
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		P

	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion.....	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)		--
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		N
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N
	Results: No fire. No explosion.....	(See Table 8.3.2)	N
8.3.3	Free fall		--
	Results: No fire. No explosion.	(See Table 8.3.3)	P
8.3.4	Thermal abuse (cells)		--
	The cells were held at 130°C ± 2°C for: - 10 minutes; or		P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N
	Oven temperature (°C).....	130	P
	Gross mass of cell (g).....	2.9041	P
	Results: No fire. No explosion.	(See Table 8.3.4)	P
8.3.5	Crush (cells)		--
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		P
	- 10% of deformation has occurred compared to the initial dimension		P
	Results: No fire. No explosion.....	(See Table 8.3.5)	P
8.3.6	Over-charging of battery		--
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N
	- Returned to ambient		N
	Results: No fire. No explosion.....		N
8.3.7	Forced discharge (cells)		--

	Results: No fire. No explosion..... : (See Table 8.3.7)	P
8.3.8	Transport tests	The samples had passed the UN38.3 test by Anbotek, the report number is R011609064B
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	(See Table 8.3.8) P
8.3.9	Design evaluation – Forced internal short circuit (cells)	--
	The cells complied with national requirement for.....	N
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or	N
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	N
	Results: No fire..... : (See Table 8.3.9)	N

9	Information for safety	--
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product	P
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user.....:	P

10	Marking	--
10.1	Cell marking	--
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	P
10.2	Battery marking	--
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	N
	Batteries marked with an appropriate caution statement.	N

10.3	Other information		--
	Storage and disposal instructions marked on or supplied with the battery.		P
	Recommended charging instructions marked on or supplied with the battery.		P

11	Packaging		--
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		N

Annex A	Charging range of secondary lithium ion cells for safe use		P
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage	4.25V	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 10-45°C	N
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N
A.4.3.1	General		N
A.4.3.2	Explanation of safety viewpoint		N
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N
A.4.4	Low temperature range	Not lower than the temperature range specific in this standard.	N

A.4.4.1	General		N
A.4.4.2	Explanation of safety viewpoint		N
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		N
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle to cylindrical cell		N
A.5.5.1	Insertion of nickel particle to winding core		N
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		N
A.5.6	Insertion of nickel particle to prismatic cell		P

	TABLE: List of critical components				P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Cell	Shenzhen Jin yu zhou Energy Co., Ltd.	501035	DC 3.7V, 135mAh	IEC 62133:2012	Test with appliance
1) An asterisk indicates a mark which assures the agreed level of surveillance.					

8.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample No.	Recommended charging voltage V _c , (Vdc)	Recommended charging current I _{rec} , (mA)	OCV at start of test, (Vdc)	Results	
Cell- 01	4.2	67.5	4.162	No fire or explosion, No leakage	
Cell- 02	4.2	67.5	4.163		
Cell- 03	4.2	67.5	4.160		
Cell- 04	4.2	67.5	4.164		
Cell- 05	4.2	67.5	4.165		
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)					

8.2.2	TABLE: Moulded case stress at high ambient temperature (battery)			N
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Results	
--	--	--	--	
--	--	--		
--	--	--		
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)				

8.3.1		TABLE: External short circuit (cell)				P
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT, (°C)	Results	
Charging temperature: 45°C						
Cell- 06	20	4.222	80 ± 20	75.2	No fire or explosion	
Cell- 07	20	4.217	80 ± 20	81.2		
Cell- 08	20	4.221	80 ± 20	74.3		
Cell- 09	20	4.226	80 ± 20	76.2		
Cell- 10	20	4.214	80 ± 20	81.4		
Charging temperature: 10°C						
Cell- 11	20	4.160	80 ± 20	83.1	No fire or explosion	
Cell- 12	20	4.162	80 ± 20	74.2		
Cell- 13	20	4.163	80 ± 20	74.1		
Cell- 14	20	4.161	80 ± 20	81.2		
Cell- 15	20	4.162	80 ± 20	76.4		
Supplementary information:						
- No fire or explosion						
- No leakage						
- Leakage						
- Fire						
- Explosion						
- Bulge						
- Others (please explain)						

8.3.2	TABLE: External short circuit (battery)					N
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (Ω)	Maximum case temperature rise ΔT, (°C)	Results	
Charging temperature: 45°C						
--	--	--	--	--	--	
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		
Charging temperature: 10°C						
--	--	--	--	--	--	

--	--	--	--	--	
--	--	--	--	--	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information: <ul style="list-style-type: none">- No fire or explosion- No leakage- Leakage- Fire- Explosion- Bulge- Others (please explain)					

8.3.3	TABLE: Free fall				P
Sample No.	Time	Drop height	OCV at start of test, (Vdc)	OCV at after of test, (Vdc)	Results
Free fall for cell					
Cell- 16	1st	1m	4.161	4.160	No fire or explosion
	2nd	1m	4.160	4.160	
	3rd	1m	4.160	4.160	
Cell- 17	1st	1m	4.162	4.162	
	2nd	1m	4.162	4.162	
	3rd	1m	4.162	4.162	
Cell- 18	1st	1m	4.165	4.164	
	2nd	1m	4.164	4.164	
	3rd	1m	4.164	4.164	
Free fall for battery					
--	--	--	--	--	--
	--	--	--	--	
	--	--	--	--	
--	--	--	--	--	
	--	--	--	--	
	--	--	--	--	
--	--	--	--	--	
	--	--	--	--	
	--	--	--	--	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.4		TABLE: Thermal abuse (cells)			P
Sample No.	OCV at start of test, (Vdc)	Ambient, (°C)	Temperature raised at a rate(°C)	Results	
Charging temperature: 45°C					
Cell- 19	4.217	130±2	5 °C/min ± 2 °C/min	No fire or explosion	
Cell- 20	4.223	130±2	5 °C/min ± 2 °C/min		
Cell- 21	4.222	130±2	5 °C/min ± 2 °C/min		
Cell- 22	4.215	130±2	5 °C/min ± 2 °C/min		
Cell- 23	4.221	130±2	5 °C/min ± 2 °C/min		
Charging temperature: 10°C					
Cell- 24	4.163	130±2	5 °C/min ± 2 °C/min	No fire or explosion	
Cell- 25	4.162	130±2	5 °C/min ± 2 °C/min		
Cell- 26	4.165	130±2	5 °C/min ± 2 °C/min		
Cell- 27	4.161	130±2	5 °C/min ± 2 °C/min		
Cell- 28	4.162	130±2	5 °C/min ± 2 °C/min		
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)					

8.3.5	TABLE: Crush (cells)					P
Sample No.	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/ diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
A prismatic cell was crushed with its longitudinal axis parallel to the flat surfaces of the crushing apparatus. Test only the wide side of prismatic cells						
Charging temperature: 45°C						
Cell- 29	4.225	4.218	4.69	1/10*4.69	No fire or explosion	
Cell- 30	4.221	4.216	4.69	1/10*4.69		
Cell- 31	4.223	4.214	4.69	1/10*4.69		
Cell- 32	4.224	4.218	4.69	1/10*4.69		
Cell- 33	4.221	4.213	4.69	1/10*4.69		
Charging temperature: 10°C						
Cell- 34	4.162	4.147	4.69	1/10*4.69	No fire or explosion	
Cell- 35	4.164	4.150	4.69	1/10*4.69		
Cell- 36	4.163	4.148	4.69	1/10*4.69		
Cell- 37	4.165	4.151	4.69	1/10*4.69		
Cell- 38	4.163	4.146	4.69	1/10*4.69		
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)						

8.3.6	TABLE: Over-charging of battery				N
Supply voltage (Vdc).....:			--		—
Sample No.	OCV before charging, (Vdc)	Constant charging current (mA)	Maximum outer casing temperature, (°C)	Results	
--	--	--	--	--	
--	--	--	--		
--	--	--	--		
--	--	--	--		
--	--	--	--		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.7	TABLE: Forced discharge (cells)				P
Sample No.	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I _r , (mA)	Time for reversed charge, (minutes)	Results	
Cell- 39	3.225	135	90	No fire or explosion	
Cell- 40	3.241	135	90		
Cell- 41	3.234	135	90		
Cell- 42	3.228	135	90		
Cell- 43	3.227	135	90		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.8 Table for detail data

1. Altitude simulation

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 44	--	--	--	--	--	--	N
Cell- 45	--	--	--	--	--	--	N
Cell- 46	--	--	--	--	--	--	N
Cell- 47	--	--	--	--	--	--	N
Cell- 48	--	--	--	--	--	--	N
Cell- 49	--	--	--	--	--	--	N
Cell- 50	--	--	--	--	--	--	N
Cell- 51	--	--	--	--	--	--	N

Cell- 52	--	--	--	--	--	--	N
Cell- 53	--	--	--	--	--	--	N

2. Thermal test

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 44	--	--	--	--	--	--	N
Cell- 45	--	--	--	--	--	--	N
Cell- 46	--	--	--	--	--	--	N
Cell- 47	--	--	--	--	--	--	N
Cell- 48	--	--	--	--	--	--	N
Cell- 49	--	--	--	--	--	--	N
Cell- 50	--	--	--	--	--	--	N
Cell- 51	--	--	--	--	--	--	N
Cell- 52	--	--	--	--	--	--	N
Cell- 53	--	--	--	--	--	--	N

3. Vibration

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 44	--	--	--	--	--	--	N
Cell- 45	--	--	--	--	--	--	N
Cell- 46	--	--	--	--	--	--	N
Cell- 47	--	--	--	--	--	--	N
Cell- 48	--	--	--	--	--	--	N
Cell- 49	--	--	--	--	--	--	N
Cell- 50	--	--	--	--	--	--	N
Cell- 51	--	--	--	--	--	--	N
Cell- 52	--	--	--	--	--	--	N
Cell- 53	--	--	--	--	--	--	N

4. Shock

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 44	--	--	--	--	--	--	N
Cell- 45	--	--	--	--	--	--	N
Cell- 46	--	--	--	--	--	--	N
Cell- 47	--	--	--	--	--	--	N
Cell- 48	--	--	--	--	--	--	N
Cell- 49	--	--	--	--	--	--	N
Cell- 50	--	--	--	--	--	--	N
Cell- 51	--	--	--	--	--	--	N
Cell- 52	--	--	--	--	--	--	N
Cell- 53	--	--	--	--	--	--	N

8.3.9	TABLE: Forced internal short circuit (cells)					N
Sample No.	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location	Maximum applied pressure, (N)	Results	
Charging temperature: 45°C						
--	--	--	--	--	--	
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		
Charging temperature: 10°C						
--	--	--	--	--	--	
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		

Supplementary information:

1) Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

Photo Documentation

Photo 1

- ☐ front
- ☒ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal



Photo 2

- ☐ front
- ☒ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

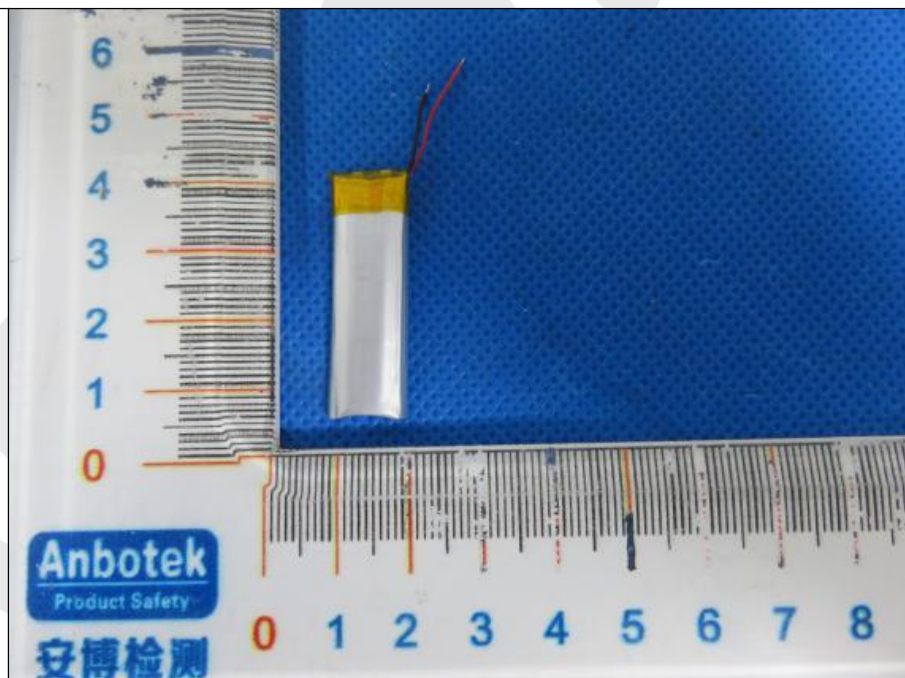


Photo Documentation

Photo 3

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal



Photo 4

- ☐ front
☒ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal

