

# EMC REPORT

**Applicant:**

**Address of Applicant:**

**Manufacturer/Factory:**

**Address of  
Manufacturer/Factory:**

**Equipment Under Test (EUT)**

Product Name: Bluetooth headphone

Model No.: B1

**Applicable standards:** Draft ETSI EN 301 489-1 V2.2.0 (2017-03)  
Draft ETSI EN 301 489-17 V3.2.0 (2017-03)

**Date of sample receipt:** December 25, 2017

**Date of Test:** December 26, 2017-January 02, 2018

**Date of report issue:** January 02, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



**Robinson Lo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

## 2 Version

Version No.	Date	Description
00	January 02, 2018	Original

**Prepared By:**




**Date:**

January 02, 2018

**Project Engineer**

**Check By:**



**Date:**

January 02, 2018

**Reviewer**

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 OPERATING MODES .....	6
5.3 DESCRIPTION OF SUPPORT UNITS .....	6
5.4 TEST FACILITY .....	6
5.5 TEST LOCATION .....	6
5.6 DEVIATION FROM STANDARDS .....	6
5.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
6 EQUIPMENT USED DURING TEST .....	7
7 EMC REQUIREMENTS SPECIFICATION IN ETSI EN 301 489-17 .....	10
7.1 EMI (EMISSION) .....	10
7.1.1 Radiated Emission .....	10
7.1.2 Conducted Emissions .....	14
7.1.3 Harmonics Test Results .....	19
7.1.4 Flicker Test Results .....	19
7.2 IMMUNITY .....	20
7.2.1 Electrostatic Discharge .....	21
7.2.2 Radiated Immunity .....	23
7.2.3 Radio frequency common mode .....	25
7.2.4 Electrical Fast Transients .....	27
7.2.5 Surge .....	29
7.2.6 Voltage Dip and Voltage Interruptions .....	31
8 TEST SETUP PHOTO .....	33
9 EUT CONSTRUCTIONAL DETAILS .....	37

## 4 Test Summary

EMI Test				
Test Item	Test Requirement	Test Method	Application	Result
Radiated Emission	ETSI EN 301 489-17	ETSI EN301 489-1	Enclosure	Pass
Conducted Emission	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	Pass
Harmonic Current Emissions	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	Pass
EMS Test				
ESD (Electrostatic Discharge)	ETSI EN 301 489-17	EN 61000-4-2	Enclosure	Pass
Radio frequency electromagnetic field (80 MHz to 6 000 MHz)	ETSI EN 301 489-17	EN 61000-4-3	Enclosure	Pass
EFT (Electrical Fast Transients)	ETSI EN 301 489-17	EN 61000-4-4	AC port	Pass
Surge Immunity	ETSI EN 301 489-17	EN 61000-4-5	AC port	Pass
Radio frequency, common mode	ETSI EN 301 489-17	EN 61000-4-6	AC port	Pass
Voltage Dips and Interruptions	ETSI EN 301 489-17	EN 61000-4-11	AC port	Pass

*Remark:*

*Pass: The EUT complies with the essential requirements in the standard.*

*\*: The tests result reference to the test report No. GTS201710000115E06*

*N/A: Not applicable*

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Bluetooth headphone
Model No.:	B1
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	BT EDR: 79 BT BLE: 40
Channel separation:	BT EDR: 1MHz BT BLE: 2MHz
Modulation type:	BT EDR: GFSK, Pi/4DQPSK, 8DPSK BT BLE: GFSK
Antenna Type:	Integral antenna
Antenna gain:	0.0dBi(declare by Applicant)
Power Supply:	Rechargeable battery:DC3.7V , 250mAh Battery charge by USB DC5V

## 5.2 Operating Modes

Operating mode	Detail description
Bluetooth mode:	Keep the EUT in charging and communications with bluetooth function.

## 5.3 Description of Support Units

None.
-------

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.
--

## 5.5 Test Location

RI test was performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.
All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

## 5.6 Deviation from Standards

None.
-------

## 5.7 Abnormalities from Standard Conditions

None.
-------

## 5.8 Other Information Requested by the Customer

None.
-------

## 6 Equipment Used during Test

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 28 2017	June. 27 2018
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 28 2017	June. 27 2018
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June. 28 2017	June. 27 2018
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 28 2017	June. 27 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 28 2017	June. 27 2018
9	Coaxial Cable	GTS	N/A	GTS211	June. 28 2017	June. 27 2018
10	Coaxial cable	GTS	N/A	GTS210	June. 28 2017	June. 27 2018
11	Coaxial Cable	GTS	N/A	GTS212	June. 28 2017	June. 27 2018
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 28 2017	June. 27 2018
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June. 28 2017	June. 27 2018
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 28 2017	June. 27 2018
15	Band filter	Amindeon	82346	GTS219	June. 28 2017	June. 27 2018
16	Constant temperature and humidity box	Oregon Scientific	BA-888	GTS248	June. 28 2017	June. 27 2018
17	D.C. Power Supply	Instek	PS-3030	GTS232	June. 28 2017	June. 27 2018
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS588	June. 28 2017	June. 27 2018
19	Splitter	Agilent	11636B	GTS237	June. 28 2017	June. 27 2018

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 28 2017	June. 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 28 2017	June. 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 28 2017	June. 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 28 2017	June. 27 2018

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	KIKUSUI	KES4021A	GTS242	June. 28 2017	June. 27 2018
2	Thermo meter	KTJ	TA328	GTS243	June. 28 2017	June. 27 2018

Conducted Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Signal Generator	R&S	SMA100B	17-307827	June. 28 2017	June. 27 2018
2	CDN	LIONCEL	CDN-M3-16	170702	June. 28 2017	June. 27 2018
3	ATT	RFLIGHT	NTWPA	14103467	June. 28 2017	June. 27 2018

Harmonic/ Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	HARMONIC/FLICKER ANALYZER	KIKUSUI	KHA1000	GTS235	June. 28 2017	June. 27 2018
2	AC POWER SUPPLY	KIKUSUI	PCR4000LE	GTS236	June. 28 2017	June. 27 2018
3	LINE IMPEDANCE NETWORK	KIKUSUI	LIN1020JF	GTS237	June. 28 2017	June. 27 2018
4	Thermo meter	KTJ	TA328	GTS256	June. 28 2017	June. 27 2018



EFT, Surge, Voltage dips and Interruption						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June. 28 2017	June. 27 2018
2	Thermo meter	KTJ	TA328	GTS238	June. 28 2017	June. 27 2018



Radiated Immunity:						
Item	Test Equipment	Manufacturer	Model No.	Serial NO.	Cal.Date (mm-dd-yy)	Cal.Due Date (mm-dd-yy)
1	Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	2017-06-10	2020-06-09
2	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-08	2017-04-25	2018-04-24
3	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	2017-04-25	2018-04-24
4	Log-periodic Antenna (0.07-3GHz)	Schwarzbeck	VUSLP9111E	SEM003-17	N/A	N/A
5	Signal Generator	Rohde & Schwarz	SMB100A	SEM006-11	2017-04-25	2018-04-24
6	Broadband Amplifier (80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	2017-10-09	2018-10-08
7	Broadband Amplifier (800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	2017-10-09	2018-10-08
8	Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	SEM010-01	2017-10-09	2018-10-08
9	Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2017-04-25	2018-04-24
10	Audio Analyzer	Rohde & Schwarz	UPV	SEM008-03	2017-10-09	2018-10-08
11	Conditioning Amplifier	Brüel & Kjaer	2690-OS2	SEM005-10	2017-04-25	2018-04-24

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	GTS243	June. 28 2017	June. 27 2018
2	Barometer	ChangChun	DYM3	GTS255	June. 28 2017	June. 27 2018

## 7 EMC Requirements Specification in ETSI EN 301 489-17

### 7.1 EMI (Emission)

#### 7.1.1 Radiated Emission

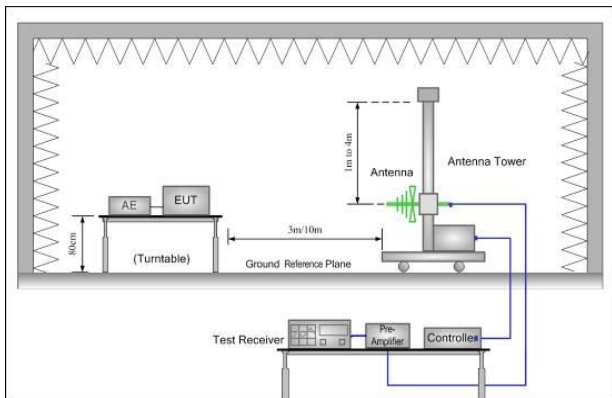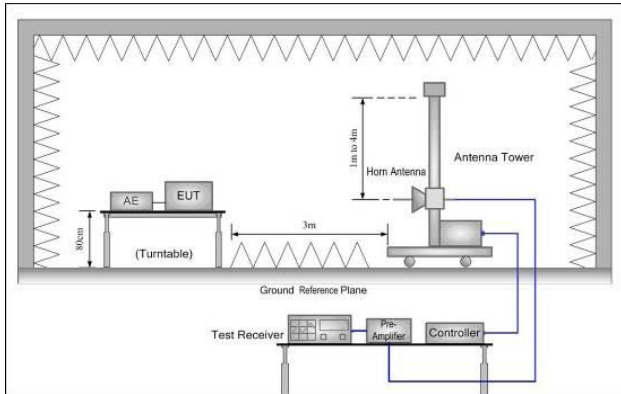Test Requirement:	ETSI EN 301 489-17				
Test Method:	ETSI EN 301 489-1 and CISPR16-2-3				
Test Frequency Range:	30MHz to 6GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-230MHz		40.00		Quasi-peak Value
	230MHz-1GHz		47.00		Quasi-peak Value
	1GHz-3GHz		50.00		Average Value
			70.00		Peak Value
	3GHz-6GHz		54.00		Average Value
			74.00		Peak Value
Test setup:	Below 1GHz				
					
	Above 1GHz				
					

Test Procedure:	<p>■ <b>From 30MHz to 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The radiated emissions test was conducted in a semi-anechoic chamber.</li> <li>2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.</li> <li>3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.</li> <li>4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.</li> </ol> <p>■ <b>Above 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The radiated emissions test was conducted in a fully-anechoic chamber.</li> <li>2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.</li> <li>3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT.</li> <li>4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.</li> </ol>					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar
Measurement Record:	Uncertainty: ± 4.5dB					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## Measurement Data

### Below 1GHz

#### Bluetooth EDR Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
170.20	46.96	8.50	1.69	37.19	19.96	40.00	-20.04	Vertical
319.94	43.82	13.98	2.47	37.44	22.83	47.00	-24.17	Vertical
329.04	43.39	14.15	2.52	37.45	22.61	47.00	-24.39	Vertical
399.03	49.57	15.30	2.85	37.52	30.20	47.00	-16.80	Vertical
410.38	47.47	15.54	2.91	37.52	28.40	47.00	-18.60	Vertical
560.69	43.58	18.67	3.56	37.53	28.28	47.00	-18.72	Vertical
173.21	56.40	8.63	1.70	37.20	29.53	40.00	-10.47	Horizontal
229.29	48.92	11.49	2.01	37.36	25.06	40.00	-14.94	Horizontal
319.94	57.45	13.98	2.47	37.44	36.46	47.00	-10.54	Horizontal
394.86	60.35	15.25	2.83	37.52	40.91	47.00	-6.09	Horizontal
401.84	59.66	15.34	2.86	37.52	40.34	47.00	-6.66	Horizontal
566.62	49.04	18.78	3.59	37.53	33.88	47.00	-13.12	Horizontal

#### Bluetooth BLE Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
166.65	46.29	0.00	1.67	32.04	15.92	40.00	-24.08	Vertical
303.54	51.18	0.00	2.38	32.17	21.39	47.00	-25.61	Vertical
392.10	57.72	0.00	2.82	31.91	28.63	47.00	-18.37	Vertical
541.37	52.85	0.00	3.49	31.33	25.01	47.00	-21.99	Vertical
645.12	48.32	0.00	3.89	31.11	21.10	47.00	-25.90	Vertical
906.48	50.65	0.00	4.88	31.18	24.35	47.00	-22.65	Vertical
166.07	52.09	0.00	1.66	32.04	21.71	40.00	-18.29	Horizontal
234.17	55.40	0.00	2.04	32.16	25.28	47.00	-21.72	Horizontal
307.83	63.37	0.00	2.40	32.15	33.62	47.00	-13.38	Horizontal
383.93	68.58	0.00	2.78	31.93	39.43	47.00	-7.57	Horizontal
549.02	59.85	0.00	3.52	31.30	32.07	47.00	-14.93	Horizontal
796.18	56.01	0.00	4.45	31.31	29.15	47.00	-17.85	Horizontal

**Above 1GHz**

Bluetooth EDR Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1210.00	34.78	25.39	4.47	33.10	31.54	70.00	-38.46	Vertical
2405.00	34.14	27.57	5.40	33.99	33.12	70.00	-36.88	Vertical
3555.00	34.77	29.09	7.07	32.69	38.24	74.00	-35.76	Vertical
4150.00	31.24	30.06	8.01	32.01	37.30	74.00	-36.70	Vertical
5275.00	29.34	31.76	9.17	32.31	37.96	74.00	-36.04	Vertical
5895.00	27.99	32.76	10.06	32.19	38.62	74.00	-35.38	Vertical
1525.00	34.40	25.17	4.70	33.65	30.62	70.00	-39.38	Horizontal
2135.00	33.57	27.39	5.11	34.30	31.77	70.00	-38.23	Horizontal
3265.00	34.87	28.44	6.49	33.02	36.78	74.00	-37.22	Horizontal
3910.00	29.14	29.52	7.71	32.29	34.08	74.00	-39.92	Horizontal
4790.00	28.05	31.76	8.59	32.08	36.32	74.00	-37.68	Horizontal
5735.00	27.39	32.56	9.83	32.28	37.50	74.00	-36.50	Horizontal

## Bluetooth BLE Mode


Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1870.00	35.97	25.61	4.90	34.23	32.25	70.00	-37.75	Vertical
2710.00	34.39	28.18	5.68	33.64	34.61	70.00	-35.39	Vertical
3775.00	30.22	29.33	7.48	32.44	34.59	74.00	-39.41	Vertical
4285.00	32.35	30.65	8.14	31.86	39.28	74.00	-34.72	Vertical
5015.00	29.61	31.97	8.78	32.19	38.17	74.00	-35.83	Vertical
5715.00	29.08	32.50	9.81	32.30	39.09	74.00	-34.91	Vertical
1930.00	33.86	25.86	4.92	34.34	30.30	70.00	-39.70	Horizontal
3065.00	32.15	28.67	6.08	33.26	33.64	74.00	-40.36	Horizontal
4220.00	29.71	30.27	8.08	31.94	36.12	74.00	-37.88	Horizontal
4630.00	27.94	31.55	8.45	32.01	35.93	74.00	-38.07	Horizontal
5150.00	26.63	32.07	8.99	32.26	35.43	74.00	-38.57	Horizontal
5820.00	27.05	32.68	9.95	32.23	37.45	74.00	-36.55	Horizontal

Remark:


1. The EUT was test at 3m in field chamber.
2. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

## 7.1.2 Conducted Emissions

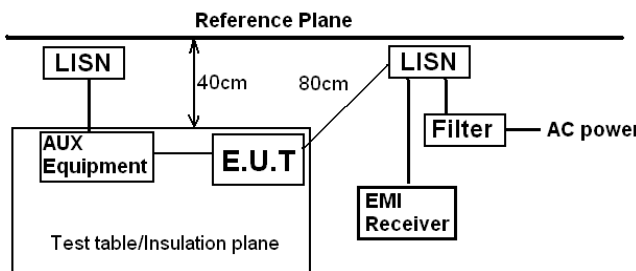Test Requirement:	ETSI EN 301 489-17		
Test Method:	ETSI EN 301 489-1		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	 <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55032 Class B on conducted measurement.</li> </ol>		
Test Instruments:	Temp.:	24 °C	Humid.: 51% Press.: 1 010mbar
Measurement Record:	Uncertainty: ± 3.45dB		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Bluetooth EDR mode


Line:

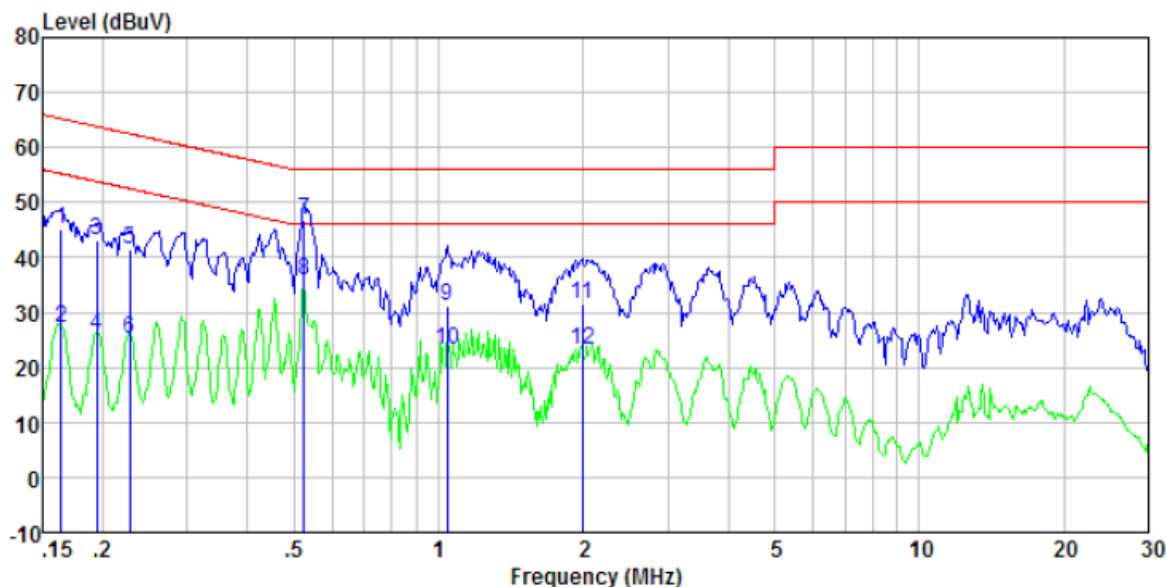

Freq MHz	Reading level dBuV	1ISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.164	44.71	0.42	0.12	45.25	65.25	-20.00	QP
0.164	26.61	0.42	0.12	27.15	55.25	-28.10	Average
0.194	42.44	0.43	0.13	43.00	63.84	-20.84	QP
0.194	25.26	0.43	0.13	25.82	53.84	-28.02	Average
0.228	41.04	0.43	0.12	41.59	62.52	-20.93	QP
0.228	24.73	0.43	0.12	25.28	52.52	-27.24	Average
0.524	46.32	0.36	0.11	46.79	56.00	-9.21	QP
0.524	35.40	0.36	0.11	35.87	46.00	-10.13	Average
1.043	30.65	0.25	0.13	31.03	56.00	-24.97	QP
1.043	22.87	0.25	0.13	23.25	46.00	-22.75	Average
1.991	31.19	0.20	0.15	31.54	56.00	-24.46	QP
1.991	22.82	0.20	0.15	23.17	46.00	-22.83	Average



Neutral:

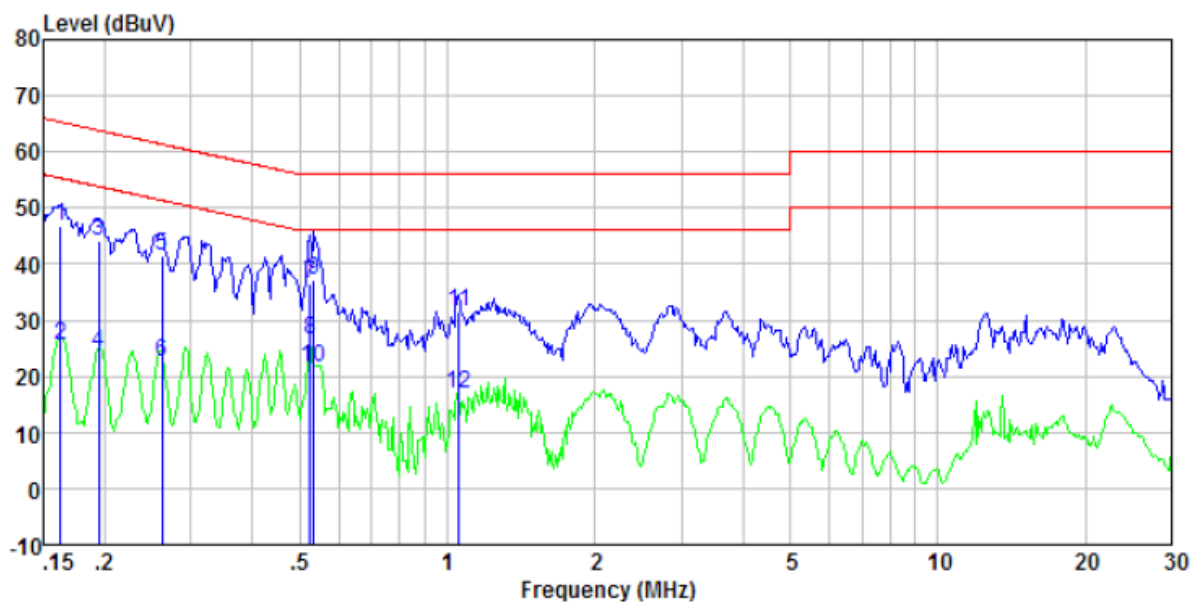


Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.162	46.12	0.41	0.12	46.65	65.34	-18.69	QP
0.162	24.90	0.41	0.12	25.43	55.34	-29.91	Average
0.194	43.49	0.41	0.13	44.03	63.84	-19.81	QP
0.194	23.55	0.41	0.13	24.09	53.84	-29.75	Average
0.262	40.80	0.42	0.11	41.33	61.38	-20.05	QP
0.262	22.11	0.42	0.11	22.64	51.38	-28.74	Average
0.524	36.09	0.34	0.11	36.54	56.00	-19.46	QP
0.524	26.00	0.34	0.11	26.45	46.00	-19.55	Average
0.535	36.84	0.32	0.11	37.27	56.00	-18.73	QP
0.535	20.97	0.32	0.11	21.40	46.00	-24.60	Average
1.054	31.16	0.21	0.13	31.50	56.00	-24.50	QP
1.054	16.52	0.21	0.13	16.86	46.00	-29.14	Average




## Bluetooth BLE mode

Line:

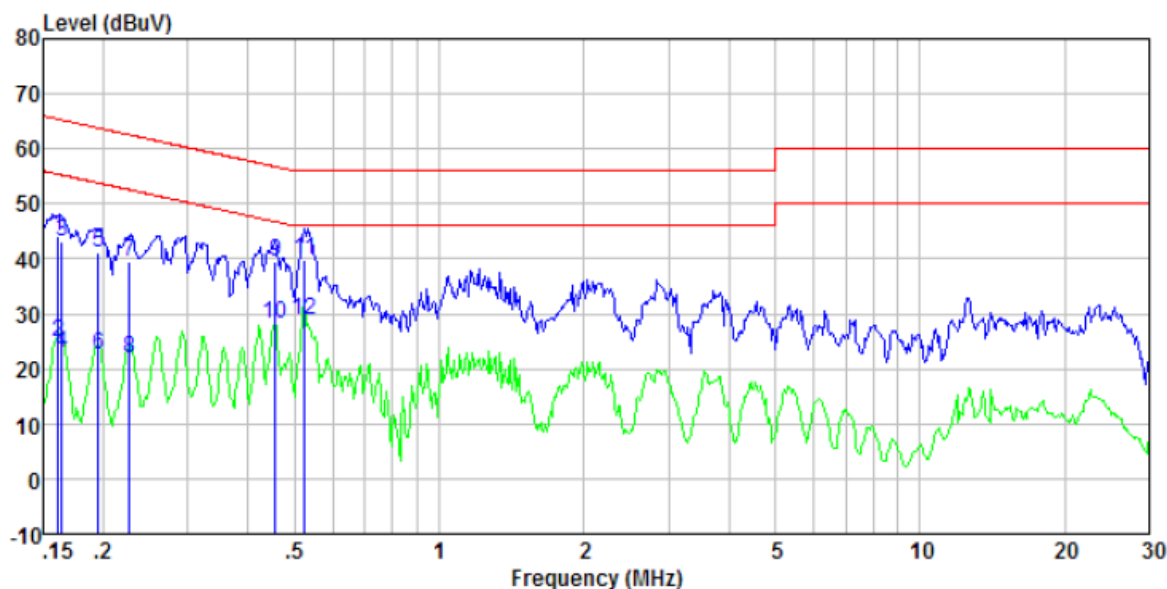

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.162	43.64	0.42	0.12	44.18	65.38	-21.20	QP
0.162	24.36	0.42	0.12	24.90	55.38	-30.48	Average
0.164	42.72	0.42	0.12	43.26	65.25	-21.99	QP
0.164	22.37	0.42	0.12	22.91	55.25	-32.34	Average
0.195	40.52	0.43	0.13	41.08	63.80	-22.72	QP
0.195	21.88	0.43	0.13	22.44	53.80	-31.36	Average
0.227	38.98	0.43	0.12	39.53	62.57	-23.04	QP
0.227	21.49	0.43	0.12	22.04	52.57	-30.53	Average
0.456	39.07	0.40	0.11	39.58	56.76	-17.18	QP
0.456	27.80	0.40	0.11	28.31	46.76	-18.45	Average
0.524	39.31	0.36	0.11	39.78	56.00	-16.22	QP
0.524	28.26	0.36	0.11	28.73	46.00	-17.27	Average

Neutral:

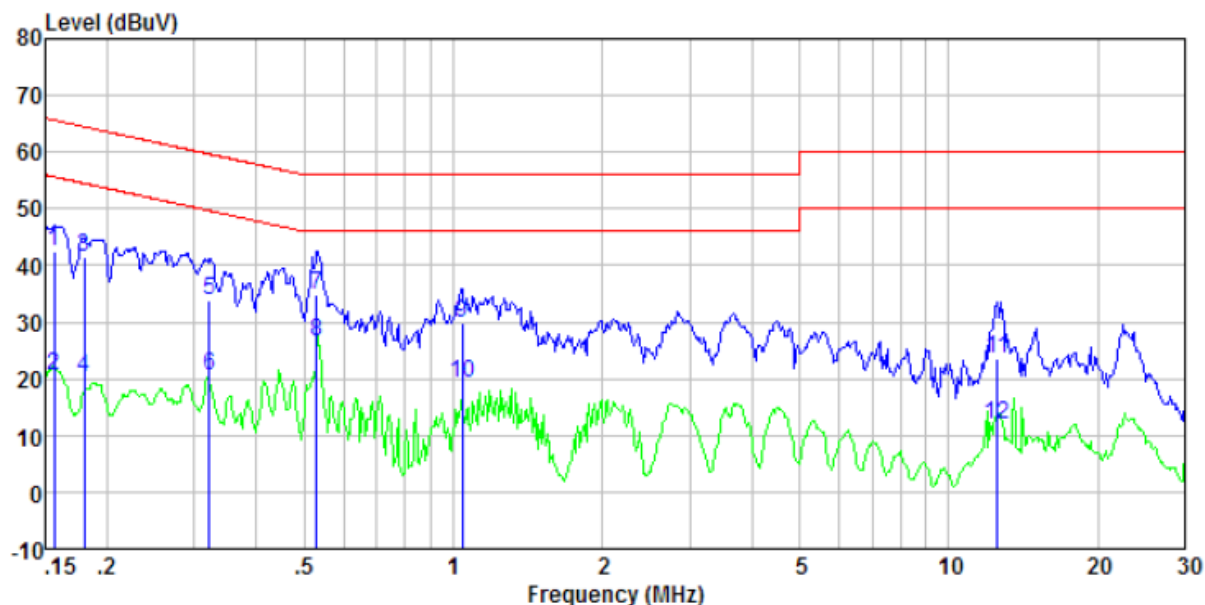

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.156	41.89	0.41	0.12	42.42	65.65	-23.23	QP
0.156	20.03	0.41	0.12	20.56	55.65	-35.09	Average
0.180	40.78	0.41	0.13	41.32	64.50	-23.18	QP
0.180	19.68	0.41	0.13	20.22	54.50	-34.28	Average
0.322	33.43	0.41	0.10	33.94	59.66	-25.72	QP
0.322	19.90	0.41	0.10	20.41	49.66	-29.25	Average
0.529	34.29	0.33	0.11	34.73	56.00	-21.27	QP
0.529	26.05	0.33	0.11	26.49	46.00	-19.51	Average
1.043	29.54	0.21	0.13	29.88	56.00	-26.12	QP
1.043	18.76	0.21	0.13	19.10	46.00	-26.90	Average
12.516	23.18	0.23	0.21	23.62	60.00	-36.38	QP
12.516	11.38	0.23	0.21	11.82	50.00	-38.18	Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

## 7.1.3 Harmonics Test Results

Test Requirement:	ETSI EN 301 489-17, EN 61000-3-2
Test Method:	N/A: See Remark Below
Remark:	<p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2. For further details, please refer to Clause 7, Note 1 of EN 61000-3-2</p> <p>Which states:</p> <p>“For the following categories of equipment limits are not specified in this edition of the standard.</p> <p>Note 1: Equipment with a rated power of 75W or less, other than lighting equipment.”</p>

## 7.1.4 Flicker Test Results

Test Requirement:	ETSI EN 301 489-17, EN 61000-3-3
Test Method:	EN 61000-3-3
Class/Severity:	Clause 5 of EN 61000-3-3
Measurement Time:	10 min
Detector:	As per EN 61000-3-3
Test Instruments:	Temp.: 24 °C Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details, Only show test data of the worse mode on the test report.
Test results:	Pass

## Measurement Data


### Bluetooth BLE mode

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.006	3.30	PASS
dmax [%]	0.074	4.00	PASS
dt [s]	0.000	0.50	PASS

## 7.2 Immunity

Performance Criteria of ETSI EN 301 489-17, clause 6	
Continuous phenomena applied to transmitters (CT)	<ol style="list-style-type: none"> <li>1. During the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).</li> <li>2. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained.</li> <li>3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.</li> </ol>
Transient phenomena applied to Transmitters (TT)	<ol style="list-style-type: none"> <li>1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link.</li> <li>2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained.</li> <li>3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.</li> </ol>
Continuous phenomena applied to Receivers (CR)	<ol style="list-style-type: none"> <li>1. During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence.</li> <li>2. During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).</li> <li>3. At the conclusion of the test, the EUT shall operate as intended with no loss of user control the The communication link shall have been maintained.</li> </ol>
Transient phenomena applied to Receivers (TR)	<ol style="list-style-type: none"> <li>1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link.</li> <li>2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained</li> </ol>
Ancillary equipment tested on a stand alone basis	<p>If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in the clauses above are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation.</p>

## 7.2.1 Electrostatic Discharge

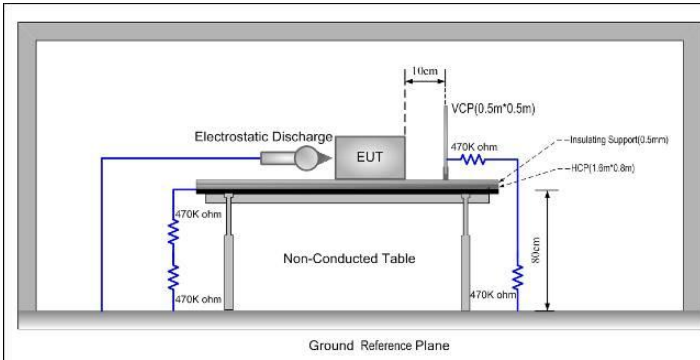Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ HCP/VCP: $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Contact Discharge: Minimum 10 times at each test point, Air Discharge: Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Limit:	Criteria B
Test setup:	
Test Procedure:	<p><b>Air discharge:</b></p> <ol style="list-style-type: none"> <li>1. The test was applied on non-conductive surfaces of EUT.</li> <li>2. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.</li> <li>3. After each discharge, the discharge electrode was removed from the EUT.</li> <li>4. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.</li> <li>5. This procedure was repeated until all the air discharge completed</li> </ol> <p><b>Contact Discharge:</b></p> <ol style="list-style-type: none"> <li>1. The test was applied on conductive surfaces of EUT.</li> <li>2. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.</li> <li>3. the tip of the discharge electrode was touch the EUT before the discharge switch was operated.</li> </ol> <p><b>Indirect discharge for horizontal coupling plane</b></p> <ol style="list-style-type: none"> <li>1. At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT.</li> <li>2. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.</li> <li>3. Consideration should be given to exposing all sides of the EUT.</li> </ol>

	<b>Indirect discharge for vertical coupling plane</b> 1. At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. 2. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. 3. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.					
Test environment:	Temp.:	24 °C	Humid.:	51%	Press.:	1 010mbar
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					


**Measurement Record:**

Measurement Record				
Test points:	I: Port, metallic parts			
	II: Seams, surface			
Direct discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observations Performance	Result
± 4	Contact	I	A	Pass
± 2, ± 4,± 8	Air	II	A	Pass
Indirect discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass

Remark:

A: Normal performance within the specification limits.

## 7.2.2 Radiated Immunity

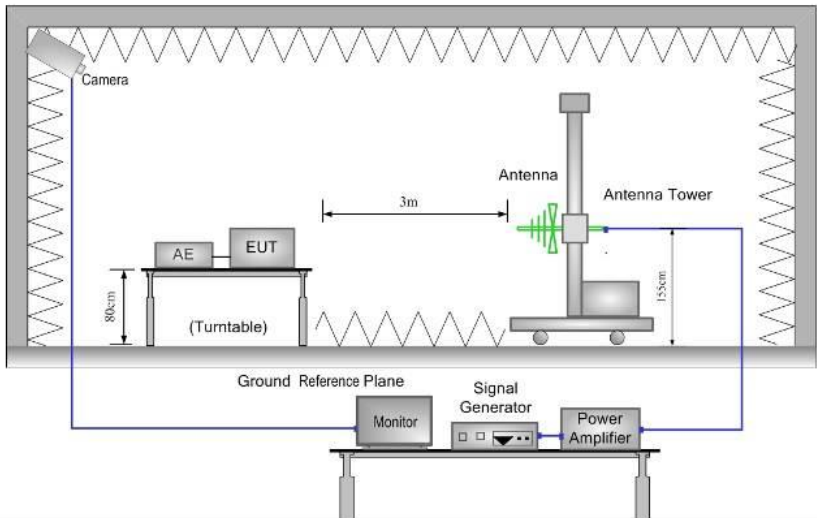Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 6GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items.</li> <li>2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.</li> <li>3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area).</li> <li>4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value.</li> <li>5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s.</li> <li>6. The test normally was performed with the generating antenna facing each side of the EUT.</li> <li>7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned</li> </ol>

	vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test results:	Pass

## Measurement Record:


Frequency	Level	Modulation	Operating Mode	Antenna Polarization	EUT Face	Observations (Performance Criterion)
80 MHz-6 GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=3seconds	BT mode	V	Front	A
				H		A
				V	Rear	A
				H		A
				V	Left	A
				H		A
				V	Right	A
				H		A
				V	Top	A
				H		A
				V	Bottom	A
				H		A

Remarks:

A: normal performance within the specification limits



## 7.2.3 Radio frequency common mode

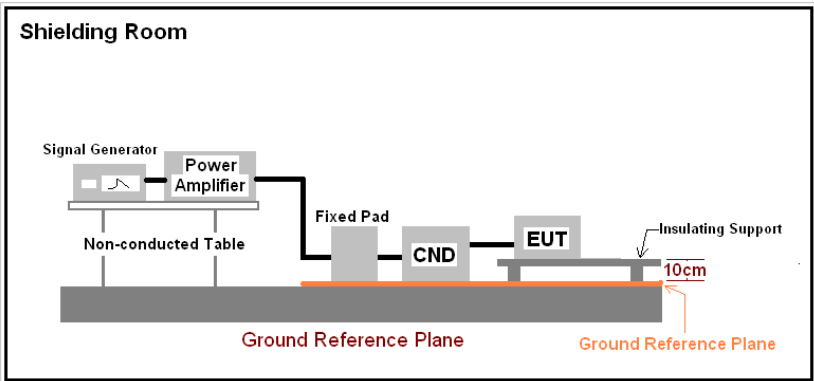Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 $\Omega$ )
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. Let the EUT work in test mode and test it.</li> <li>2. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).</li> <li>3. The disturbance signal described below is injected to EUT through CDN.</li> <li>4. The EUT operates within its operational mode(s) under intended climatic conditions after power on.</li> <li>5. The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed <math>1.5 \times 10^{-3}</math> decades/s. Where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.</li> <li>6. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.</li> </ol>
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test results:	Pass


## Measurement Record:

Frequency	Injected Position	Test Level	Modulation	Step Size	Dwell Time	Observations (Performance Criterion)
150kHz to 80MHz	AC Main	3Vrms	80%, 1kHz Amp. Mod.	1%	2s	A

Remark:

A: Normal performance within the specification limits.

### 7.2.4 Electrical Fast Transients

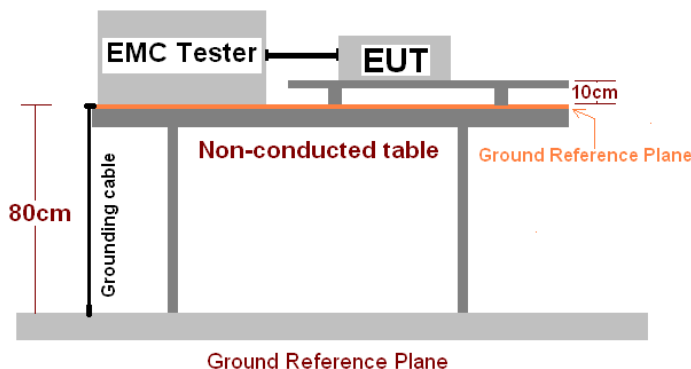Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Repetition Frequency:	5kHz
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester is connected to an EUT (Equipment Under Test) via a cable. Both are placed on a non-conducted table. A grounding cable is connected to the table, which is 80cm high. A ground reference plane is shown at the base of the table, and another is shown on the table surface, 10cm from the EUT.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness.</li> <li>2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m.</li> <li>3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.</li> <li>4. The length of the signal and power lines between the coupling device and the EUT is 0.5m</li> </ol> <p><b>Test on Signal Ports, Telecommunication Ports and Control Ports:</b> The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 2 minutes.</p> <p><b>Test on power supply ports:</b></p> <ol style="list-style-type: none"> <li>1. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.</li> <li>2. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 54% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details

Test mode:	Refer to section 5.2 for details
Test results:	Pass


## Measurement Record:

Lead under Test	Level ( $\pm$ kV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	$\pm 1.0$	Direct	A	Pass
N	$\pm 1.0$	Direct	A	Pass
L-N	$\pm 1.0$	Direct	A	Pass

Remark:

A: Normal performance within the specification limits

## 7.2.5 Surge

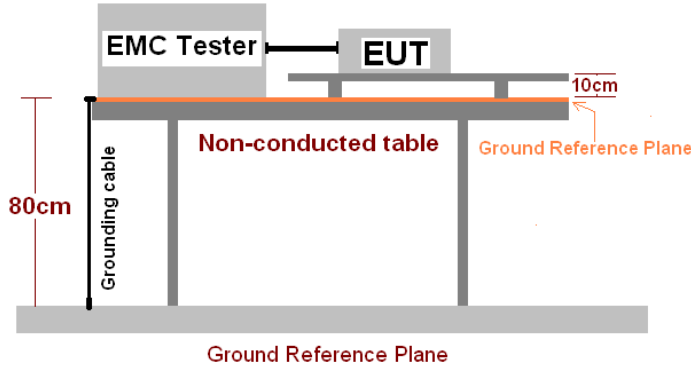Test Requirement:	ETSI EN 301 489-17
Test Method:	ETSI EN 61000-4-5
Test Level:	±1kV Live to Neutral: Differential mode
Polarity:	Positive & Negative
Test Interval:	60s between each surge
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester is connected to an EUT (Equipment Under Test) via a cable. Both are placed on a non-conducted table. A grounding cable is connected to the table, which is 80cm high. The EUT is 10cm above the table surface. A ground reference plane is indicated at the base of the table.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.</li> <li>2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.</li> <li>3. Different phase angles are done individually.</li> <li>4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Measurement Record:**

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)
L-N	± 1	5	60s	0°	A
				90°	A
				180°	A
				270°	A

Remark:

A. Normal performance within the specification limits

## 7.2.6 Voltage Dip and Voltage Interruptions

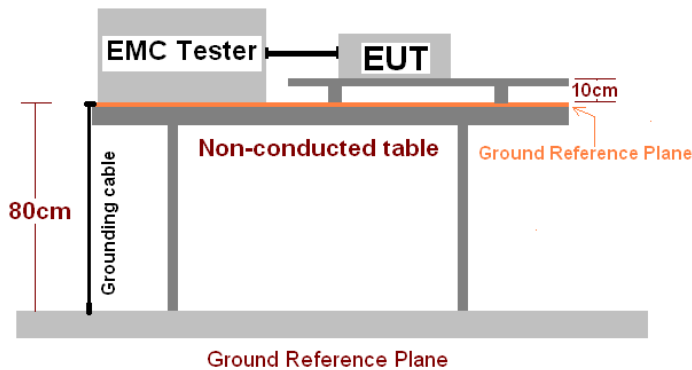Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-11
Test Level:	0% of VT(Supply Voltage) for 0.5 period 0% of VT(Supply Voltage) for 1.0 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period
No. of Dips / Interruptions:	3 per Level
Performance Criterion:	0% VD, 0.5 period----Performance criterion: B 0% VD, 1 period----Performance criterion: B 70% VD, 25 period----Performance criterion: C 0% VI, 250 period----Performance criterion: C
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a non-conducted table. A grounding cable connects the table to a ground reference plane. The vertical distance from the table top to the ground reference plane is 80cm. The vertical distance from the EUT to the ground reference plane is 10cm.</p>
Test Procedure:	<p>1&gt;.The EUT and test generator were setup as shown on above setup photo.</p> <p>2&gt;.The interruptions are introduced at selected phase angles with specified duration.</p> <p>3&gt;.Record any degradation of performance.</p>
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Record:

Test Level $U_T$	Duration (Periods)	Phase angle	No of dropout	Time between dropout	Observations (Performance Criterion)
0%	0.5	0°, 90°, 180°, 270°	3	10s	A
0%	1.0	0°, 90°, 180°, 270°	3	10s	A
70%	25	0°, 90°, 180°, 270°	3	10s	A
0%	250	0°, 90°, 180°, 270°	3	10s	B

Remark:

A. Normal performance within the specification limits

B: During the test, the adapter stops work, but after the test, it can automatically return to normal



## 8 Test Setup Photo


### Radiated Emission



## Conducted Emission



## Surges/EFT/V-dips

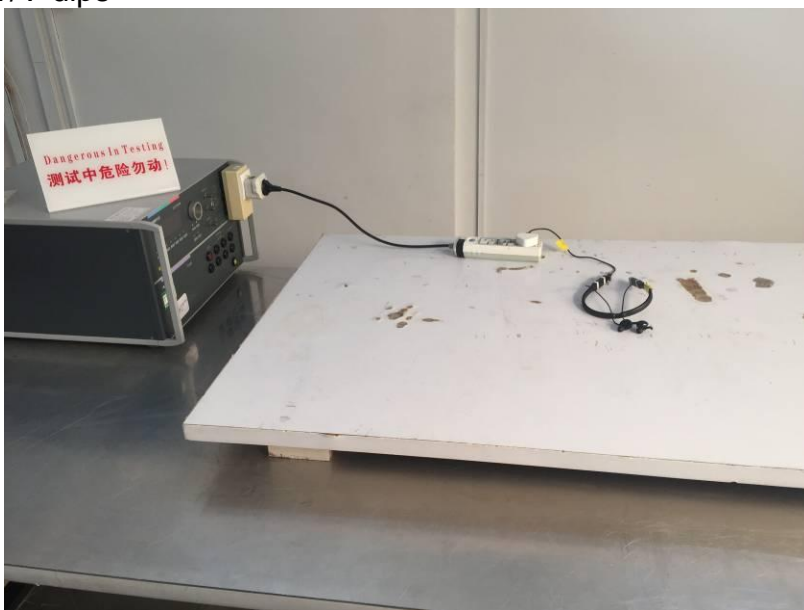


## ESD



## Flicker



CS

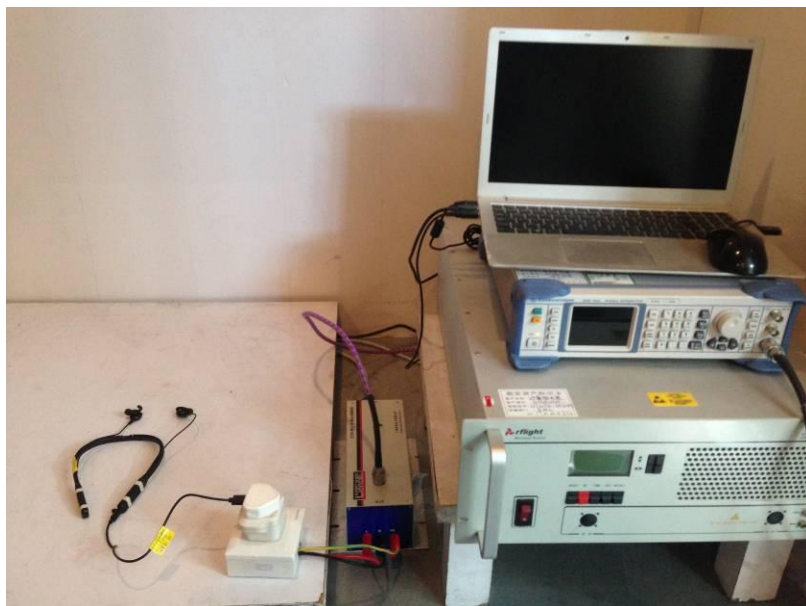

RS





## 9 EUT Constructional Details

















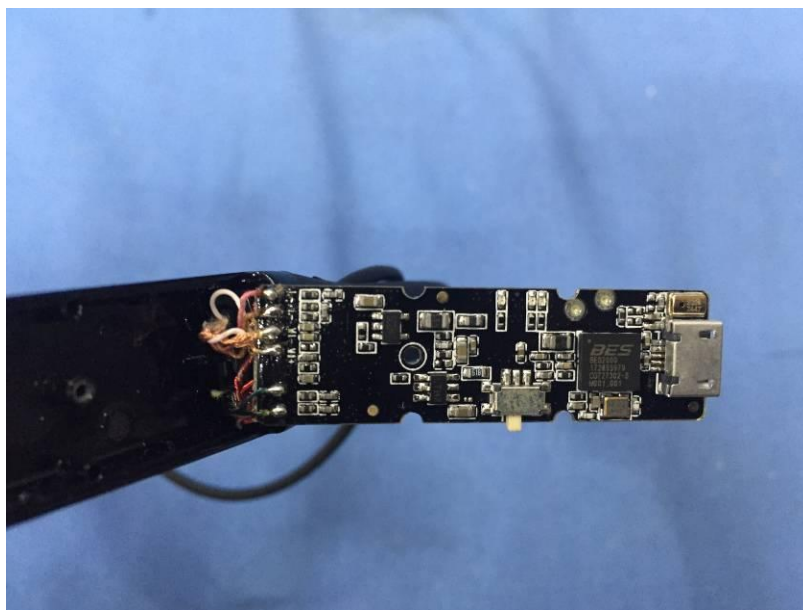

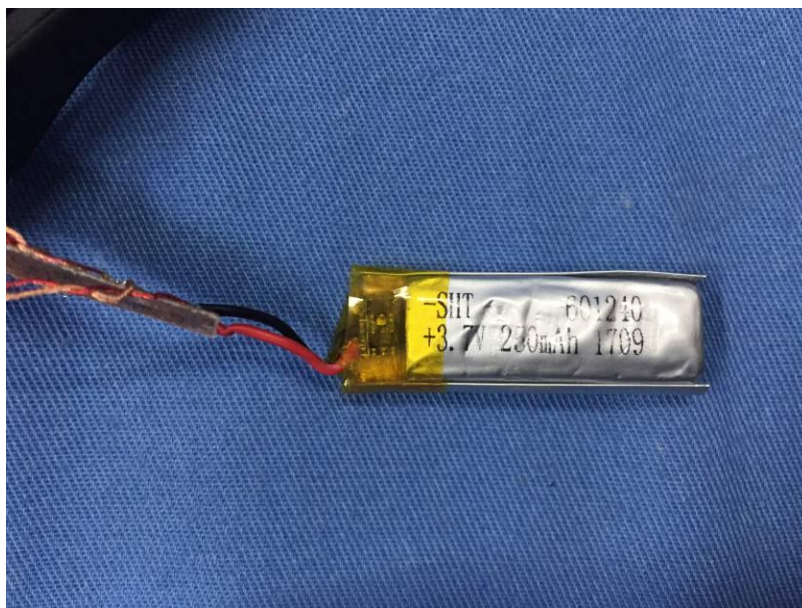

-----End-----