

Draft ETSI EN 301 489-1_{v2.1.1: 2017}/**-17**_{v3.1.1: 2017}
Final draft ETSI EN 301 489-3_{v 2.1.1: 2017}
EMISSION/IMMUNITY/HARMONICS/FLICKER
COMPLIANCE

Test Report

FOR

Home speaker with wireless charger

Model No.: P328.12X, SL218

Trade Mark: N/A

Report No.: ES180717004E

Issue Date: August 17, 2018

Prepared for

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

This report shall not be reproduced, except in full, without the written
approval of
EMTEK(SHENZHEN) CO., LTD.

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	5
2	EUT DESCRIPTION.....	7
3	SUMMARY OF TEST RESULT.....	8
4	TEST METHODOLOGY	9
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
4.2	MEASUREMENT EQUIPMENT USED.....	9
4.3	DESCRIPTION OF TEST MODES	12
4.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
4.5	SUPPORT EQUIPMENT	12
5	FACILITIES AND ACCREDITATIONS	13
5.1	FACILITIES	13
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	13
6	TEST SYSTEM UNCERTAINTY	14
7	CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS.....	15
7.1	BLOCK DIAGRAM OF TEST SETUP	15
7.2	MEASURING STANDARD	15
7.3	CONDUCTED EMISSION LIMITS (CLASS B)	15
7.4	EUT CONFIGURATION ON MEASUREMENT.....	15
7.5	OPERATING CONDITION OF EUT	15
7.6	TEST PROCEDURE	15
7.7	MEASURING RESULTS.....	16
8	ASYMMETRIC MODE CONDUCTED EMISSIONS	17
8.1	BLOCK DIAGRAM OF TEST SETUP.....	17
8.2	MEASURING STANDARD	17
8.3	CONDUCTED EMISSION LIMITS	17
8.4	EUT CONFIGURATION ON MEASUREMENT	18
8.5	OPERATING CONDITION OF EUT	18
8.6	TEST PROCEDURE	18
8.7	MEASURING RESULTS.....	18
9	RADIATED EMISSIONS	19
9.1	BLOCK DIAGRAM OF TEST SETUP.....	19
9.2	MEASURING STANDARD	19
9.3	RADIATED EMISSION LIMITS (CLASS B)	19
9.4	EUT CONFIGURATION ON MEASUREMENT	20
9.5	OPERATING CONDITION OF EUT	20
9.6	TEST PROCEDURE	20
9.7	MEASURING RESULTS.....	21

10	HARMONIC CURRENT EMISSION TEST.....	22
10.1	BLOCK DIAGRAM OF TEST SETUP.....	22
10.2	MEASURING STANDARD	22
10.3	OPERATION CONDITION OF EUT	22
10.4	MEASURING RESULTS.....	22
11	VOLTAGE FLUCTUATION AND FLICKER TESTS.....	23
11.1	BLOCK DIAGRAM OF TEST SETUP.....	23
11.2	MEASURING STANDARD	23
11.3	OPERATION CONDITION OF EUT	23
11.4	MEASURING RESULTS.....	23
12	PERFORMANCE CRITERIA	24
12.1	GENERAL PERFORMANCE CRITERIA	24
12.2	PERFORMANCE TABLE	24
12.3	PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTERS (CT)	25
12.4	PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTERS (TT)	25
12.5	PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVERS (CR)	25
12.6	PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVERS (TR)	25
13	ELECTROSTATIC DISCHARGE	26
13.1	BLOCK DIAGRAM OF TEST SETUP.....	26
13.2	TEST STANDARD.....	26
13.3	SEVERITY LEVELS AND PERFORMANCE CRITERION.....	26
13.4	OPERATING CONDITION OF EUT	26
13.5	TEST PROCEDURE	26
13.6	TEST RESULTS	27
14	RADIO FREQUENCY ELECTROMAGNETIC FIELD	28
14.1	BLOCK DIAGRAM OF TEST SETUP.....	28
14.2	TEST STANDARD.....	28
14.3	SEVERITY LEVELS AND PERFORMANCE CRITERION.....	28
14.4	OPERATING CONDITION OF EUT	29
14.5	TEST PROCEDURE	29
14.6	TEST RESULTS	29
15	FAST TRANSIENTS, COMMON MODE	30
15.1	BLOCK DIAGRAM OF TEST SETUP.....	30
15.2	TEST STANDARD.....	30
15.3	SEVERITY LEVELS AND PERFORMANCE CRITERION.....	30
15.4	OPERATING CONDITION OF EUT	31
15.5	TEST PROCEDURE	31
15.6	TEST RESULTS	31
16	SURGE.....	32
16.1	BLOCK DIAGRAM OF TEST SETUP.....	32
16.2	TEST STANDARD.....	32

16.3	SEVERITY LEVELS AND PERFORMANCE CRITERION	32
16.4	OPERATING CONDITION OF EUT	32
16.5	TEST PROCEDURE	32
16.6	TEST RESULTS	32
17	RADIO FREQUENCY, COMMON MODE	33
17.1	BLOCK DIAGRAM OF TEST SETUP	33
17.2	TEST STANDARD	33
17.3	SEVERITY LEVELS AND PERFORMANCE CRITERION	33
17.4	OPERATING CONDITION OF EUT	33
17.5	TEST PROCEDURE	33
17.6	TEST RESULTS	33
18	VOLTAGE DIPS AND INTERRUPTIONS.....	34
18.1	BLOCK DIAGRAM OF TEST SETUP	34
18.2	TEST STANDARD	34
18.3	SEVERITY LEVELS AND PERFORMANCE CRITERION	34
18.4	OPERATING CONDITION OF EUT	34
18.5	TEST PROCEDURE	34
18.6	TEST RESULTS	34
19	APPENDIX A TEST DATA.....	35
19.1	WORST DATA FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS(BT LINK)35	
19.2	DATA FOR RADIATED EMISSIONS(THE WORST OF TEST MODE(WLRELESS CHARGING (FULL LOAD))	37
19.3	DATA FOR RADIATED EMISSIONS(THE WORST OF TEST MODE(BT MODE)).....	39
19.4	DATA FOR VOLTAGE FLUCTUATIONS & FLICKER TESTS	41
19.5	DATA FOR ELECTROSTATIC DISCHARGE	42
19.6	DATA FOR RADIO FREQUENCY ELECTROMAGNETIC FIELD	43
19.7	DATA FOR FAST TRANSIENTS, COMMON MODE	44
19.8	DATA FOR SURGE	45
19.9	DATA FOR RADIO FREQUENCY, COMMON MODE	46
19.10	DATA FOR VOLTAGE DIPS AND INTERRUPTIONS	47
20	APPENDIX B PHOTOGRAPHS OF TEST SETUP.....	48
20.1	PHOTO FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS	48
20.2	PHOTO FOR RADIATED EMISSIONS	49
20.3	PHOTO FOR VOLTAGE FLUCTUATIONS & FLICKER TESTS	50
20.4	PHOTO FOR ELECTROSTATIC DISCHARGE	51
20.5	PHOTO FOR RADIO FREQUENCY ELECTROMAGNETIC FIELD.....	52
20.6	PHOTO FOR FAST TRANSIENTS, COMMON MODE.....	53
20.7	PHOTO FOR SURGE	54
20.8	PHOTO FOR RADIO FREQUENCY, COMMON MODE.....	55
20.9	PHOTO FOR VOLTAGE DIPS AND INTERRUPTIONS	56
21	APPENDIX C PHOTOGRAPHS OF EUT	57

1 TEST RESULT CERTIFICATION

Applicant :

Manufacture :

EUT : Home speaker with wireless charger

Model : P328.12X, SL218 (Note: These models are same except model number and appearance, here P328.12X was selected for full test.)

Trademark : N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
ETSI EN 301 489-1 V2.1.1: 2017	PASS
ETSI EN 301 489-17 V3.1.1: 2017	PASS

The device described above is tested by EMTEK (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the Draft ETSI EN 301 489-1 V2.2.0: 2017, Final draft ETSI EN 301 489-3 V2.1.1: 2017 and Draft ETSI EN 301 489-17 V3.2.0: 2017 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test : July 17, 2018 to August 16, 2018

Prepared by : Yaping Shen
Yaping Shen/Editor

Reviewer : Joe Xia
Joe Xia/Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager

Modified History

Version	Report No.	Revision Date	Summary
V1.0	Original Report	/	ES180717004E

2 EUT DESCRIPTION

Product:	Home speaker with wireless charger		
Model Number:	P328.12X		
Trademark:	N/A		
Modulation:	☐ WIFI DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; ☒ BT-CM GFSK, $\pi/4$ -DQPSK ☒ DCD Backscatter ☐ BT-LE GFSK		
Frequency Range:	☐ WIFI ☐ 2412-2472MHz for 802.11b; ☐ 2412-2472MHz for 802.11g; ☐ 2412-2472MHz for 802.11n(HT20); ☐ 2422-2462MHz for 802.11n(HT40); ☒ BT-CM ☒ 2402-2480MHz ☒ DCD ☒ 175KHz ☐ BT-LE ☐ 2402-2480MHz		
Number of Channels:	☐ WIFI ☐ 13 Channels for 802.11b; ☐ 13 Channels for 802.11g; ☐ 13 Channels for 802.11n(HT20); ☐ 9 Channels for 802.11n(HT40); ☒ BT-CM ☒ 79 Channels ☐ BT-LE ☐ 40 Channels		
Smart system:	☐ WIFI ☐ SISO ☐ MIMO ☒ BT-CM ☒ SISO ☐ MIMO ☐ BT-LE ☐ SISO ☐ MIMO		
Max Transmit Power:	☐ WIFI ☒ BT-CM 2.66dBm ☐ BT-LE		
Antenna:	☐ WIFI ☒ BT-CM PCB Antenna ☐ BT-LE PCB Antenna		
Antenna Gain:	☐ WIFI ☒ BT-CM 0 dBi ☐ BT-LE		
Power supply:	☒ DC 3.7V Battery ☒ AC 230V/50Hz for adapter		
Kind of Device	Bluetooth Ver.4.2+EDR		
Temperature Range:	-20°C ~ +55°C		

3 SUMMARY OF TEST RESULT

Applicable Standard: ETSI EN 301 489-1 v2.1.1: 2017			
Standard	Description of Test Item	Result	Remarks
EN 55032:2015	Conducted Emissions From The AC Mains Power Ports Emission Test 150 kHz – 30 MHz	PASS	
	Asymmetric Mode Conducted Emissions Emission Test 150 kHz – 30 MHz	-	Note1
	Radiated Emissions 30 MHz – 1000 MHz @ 3 m 1000 MHz – 6000 MHz @ 3 m	PASS	
EN 61000-3-2:2006 +A1:2009+A2:2009	Harmonic current emission test	-	Note1
EN 61000-3-3:2013	Voltage fluctuations & flicker tests	PASS	
EN 61000-4-2:2009	Electrostatic Discharge ± 2, 4 kV Contact Discharge ± 2, 4, 8 kV Air Discharge Standard Criterion B	PASS	
EN 61000-4-3:2006 +A1:2008+A2:2010	Radio frequency electromagnetic field Frequency Range: 80 MHz to 6000 MHz and Electromagnetic field: 3 V/m (unmodulated, r.m.s) Amplitude modulated: 80 % AM (1 kHz) Standard Criterion A	PASS	
EN 61000-4-4:2012	Fast transients, common mode AC ports 5/50 ns, ± 1 kV, 5 kHz DC ports 5/50 ns, ± 0.5 kV I/O ports 5/50 ns, ± 0.5 kV, 5 kHz Standard Criterion B	PASS	
EN 61000-4-5:2006	Surge (Power port 1.2/50 µs, Signal port 10/700 µs / 1.2/50 µs) AC ports: line to line: ± 0.5 kV, 1 kV line to earth: ± 0.5 kV, 1 kV, 2 kV indoor signal ports and telecommunication ports: ± 0.5 kV outdoor signal ports and telecommunication ports for symmetrically operated: ± 1 kV non-symmetrically operated: ± 0.5 kV, 1 kV Standard Criterion B	PASS	
EN 61000-4-6:2009	Radio frequency, common mode Frequency Range: 150 kHz to 80 MHz Electromagnetic field: 3 V (unmodulated, r.m.s) Amplitude modulated: 80 % AM (1 kHz) Standard Criterion A	PASS	
EN 61000-4-11:2004	Voltage dips and interruptions voltage dip 0% 10 ms (0.5 cycles) – Standard Criterion B voltage dip 0% 20 ms (1.0 cycles) – Standard Criterion B voltage dip 70% (at 50 Hz) 500 ms (25 cycles) – Standard Criterion C voltage interruption 0% (at 50 Hz) 5000 ms (250 cycles) – Standard Criterion C	PASS	
Note1: Not applicable			

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
Draft ETSI EN 301 489-1: ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU
Draft ETSI EN 301 489-17: ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;

Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

Final Draft ETSI EN 301 489-3: ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD); Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

4.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Measurement for AC(site 1)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R & S	ESCI	26115-010-0027	May 28, 2018	1 Year
2	L.I.S.N.	R & S	ENV216	101161	May 28, 2018	1 Year
3	50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 29, 2018	1 Year
4	Voltage Probe	R & S	ESH2-Z3	100122	May 29, 2018	1 Year

For TELECOM terminals Disturbance Voltage Test(site 1)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R & S	ESCI	26115-010-0027	May 28, 2018	1 Year
2	I.S.N	Teseq GmbH	ISN T800	30327	May 29, 2018	1 Year
3	I.S.N	Teseq GmbH	T8-CAT6	32186	May 29, 2018	1 Year
4	50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 29, 2018	1 Year

For 3m Radiated Emission Measurement (30M-1GHz) (3m chamber 3#)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R & S	ESCI	101414	May 28, 2018	1 Year
2	Pre-Amplifier	LUNAR-EM	LNA30M3G-25	J10100000071	May 28, 2018	1 Year
3	Bilog Antenna	Schwarzbeck	VULB9163	660	May 29, 2018	1 Year
4	Cable	H+B	NmSm-05-C15052		May 29, 2018	1 Year
5	Cable	H+B	NmSm-2-C15201		May 29, 2018	1 Year
6	Cable	H+B	NmNm-7-C15702		May 29, 2018	1 Year

For 3m Radiated Emission Measurement(1-18GHz)(3m chamber 3#)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R & S	FSV40	132.1-3008K39-100967-AP	May 28, 2018	1 Year
2	Pre-Amplifier	Lunar EM	LNA1G18-48	J1011131010001	May 28, 2018	1 Year
3	Horn Antenna	Schwarzbeck	BBHA 9120	1178	May 29, 2018	1 Year
4	Cable	H+B	SAC-40G-1	414	May 29, 2018	1 Year
5	Cable	H+B	SUCOFLEX104	MY14871/4	May 29, 2018	1 Year
6	Cable	H+B	BLU18A-NmSm-6500	D8501	May 29, 2018	1 Year

For Harmonic Current / Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	45KVA AC Power source	Teseq	NSG 1007-45/45KVA	1305A02873	May 28, 2018	1 Year
2	Signal conditioning Unit	Teseq	CCN 1000-3	1305A02873	May 28, 2018	1 Year
3	Three phase impedance network	Teseq/Germany	INA2197/37A	1305A02873	May 28, 2018	1 Year
4	Three phase impedance network	Teseq/Germany	INA 2196/75A	1305A02874	May 28, 2018	1 Year
5	Proflin 2100 AC Switching Unit	Teseq/Germany	NSG2200-3	A22714	May 28, 2018	1 Year

For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	ESD Tester	TESEQ AG	NSG 438A	130	May 29, 2018	1 Year
2	Impulse Module	TESEQ AG	IN NSG 438A A 4380-150pF/330Ohm	403-550/1712	May 29, 2018	1 Year
3	Impulse Module	TESEQ AG	INA 4553-330pF/330Ohm	403-588/1912	May 29, 2018	1 Year
4	Impulse Module	TESEQ AG	INA 4381-150pF/2kOhm	403-564/1812	May 29, 2018	1 Year
5	Impulse Module	TESEQ AG	INA 4382-330pF/2kOhm	403-565/1912	May 29, 2018	1 Year

For Radio-frequency, Electromagnetic Field Immunity

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Signal Generator	Agilent	N5181A	MY50145187	May 28, 2018	1 Year
2	RF Power Meter. Dual Channel	BOONTON	4232A	10539	May 29, 2018	1 Year
3	50ohm Diode Power Sensor	BOONTON	51011EMC	34236/34238	May 29, 2018	1 Year
4	Field Strength Meter	DARE	RSS1006A	10I00037SO22	May 29, 2018	1 Year
5	50ohm Diode Power Sensor	BOONTON	51011EMC	36164	May 29, 2018	1 Year
6	Power Amplifier	MILMEGA	80RF1000-175	1059345	May 28, 2018	1 Year
7	Power Amplifier	MILMEGA	AS0102-55	1018770	May 28, 2018	1 Year
8	Power Amplifier	MILMEGA	AS1860-50	1059346	May 28, 2018	1 Year
9	Log.-Per. Antenna	Schwarzbeck	VULP 9118E	811	May 29, 2018	1 Year
10	Broad-Band Horn Antenna	Schwarzbeck	STLP 9149	9149-227	May 29, 2018	1 Year
11	Multi-function interface system	DARE	CTR1009B	12I00250SNO 72	N/A	N/A
12	Automatic switch group	DARE	RSW1004A	N/A	N/A	N/A

For Electrical Fast Transient / Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Burst Tester	HAEFELY	PEFT4010	080981-16	May 29, 2018	1Year
2	Coupling Clamp	HAEFELY	IP-4A	147147	May 29, 2018	1Year
3	Three phase CDN	Teseq	CDN 163	202	May 29, 2018	1 Year

For Surge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Surge Controller	HAEFELY	Psurge 8000	174031	May 29, 2018	1Year
2	Impulse Module	HAEFELY	PIM 100	174124	May 29, 2018	1Year
3	Coupling Decoupling Filter	HAEFELY	PCD 130	172181	May 29, 2018	1Year
4	Coupling Module	HAEFELY	PCD122	174354	May 29, 2018	1Year
5	Surge Impulse Module	HAEFELY	PIM 120	174435	May 29, 2018	1Year
6	Coupling Module	HAEFELY	PCD 126A	174387	May 29, 2018	1Year
7	Impulse Module	HAEFELY	PIM 110	174391	May 29, 2018	1Year

For Immunity Test of Conducted Disturbance Induced by RF Field

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Simulator	EMTEST	CWS500C	0900-12	May 29, 2018	1 Year
2	CDN	EMTEST	CDN-M2	5100100100	May 29, 2018	1 Year
3	CDN	EMTEST	CDN-M3	0900-11	May 29, 2018	1 Year
4	Injection Clamp	EMTEST	F-2031-23MM	368	May 29, 2018	1 Year
5	Attenuator	EMTEST	ATT6	0010222A	May 29, 2018	1 Year

For Voltage Dips and Interruptions Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	45KVA AC Power source	Teseq	NSG 1007-45/45KVA	1305A02873	May 28, 2018	1 Year
2	Signal conditioning Unit	Teseq	CCN 1000-3	1305A02873	May 28, 2018	1 Year
3	Three phase impedance network	Teseq/Germany	INA2197/37A	1305A02873	May 28, 2018	1 Year
4	Three phase impedance network	Teseq/Germany	INA 2196/75A	1305A02874	May 28, 2018	1 Year
5	Proflin 2100 AC Switching Unit	Teseq/Germany	NSG2200-3	A22714	May 28, 2018	1 Year

4.3 DESCRIPTION OF TEST MODES

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Mode	Description
1	BT Link
2	BT Idle
3	Wireless Charging
Mode 1 is the worst case, so it was selected to record in this test report.	

4.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

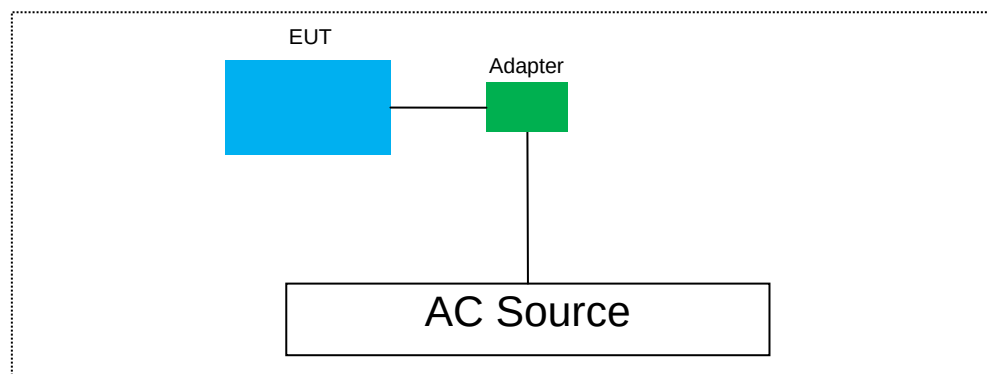

4.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1.	Adapter	N/A	YSV6-0501000	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	: Accredited by CNAS, 2016.10.24 : The certificate is valid until 2022.10.28 : The Laboratory has been assessed and proved to be in compliance : with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L2291. Accredited by TUV Rheinland Shenzhen 2016.5.19 The Laboratory has been assessed according to the requirements ISO/IEC 17025. Accredited by FCC, August 03, 2017 Designation Number: CN1204 Test Firm Registration Number: 882943 Accredited by Industry Canada, November 24, 2015 The Certificate Registration Number is 4480A. Accredited by A2LA, July 31, 2017 The Certificate Number is 4321.01.


6 TEST SYSTEM UNCERTAINTY

Maximum measurement uncertainty of the test system

Test Item	Measurement Uncertainty
Conducted Emissions	2.96dB(9k~150kHz Conduction 1#) 2.74dB(150k-30MHz Conduction 1#)
Radiated Emission(3m Chamber)	3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V) 3.7dB (1~18GHz Polarize: H) 3.6dB (1~18GHz Polarize: V)
Voltage fluctuations & flicker tests	0.07%
Harmonic current emission test	1.8%
Electrostatic Discharge	6 %
Radio frequency, common mode	1.45(Using CDN Test) 2.37(Using EM Clamp Test)
Radio frequency electromagnetic field	2.10dB(80MHz-1000MHz) 1.76dB(1000MHz-6000MHz)
Uncertainty for test site temperature and humidity	0.6℃ 4%

7 CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS

7.1 BLOCK DIAGRAM OF TEST SETUP

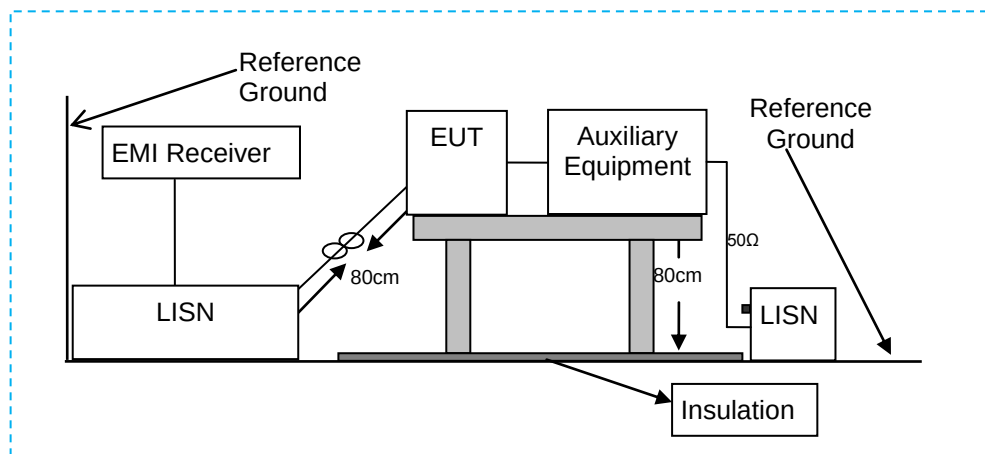

7.2 MEASURING STANDARD

ETSI EN 301 489-1 Clause 8.4
EN 55032: 2015 Clause A.3

7.3 CONDUCTED EMISSION LIMITS (CLASS B)

Power Line Conducted Emission Limits

Applicable to 1. AC mains power ports				
Table clause	Frequency range MHz	Coupling device	Detector type / bandwidth	Class B limits dB(μV)
A10.1	0,15 to 0,5	AMN	Quasi Peak / 9 kHz	66 to 56
	0,5 to 5			56
	5 to 30			60
A10.2	0,15 to 0,5	AMN	Average / 9 kHz	56 to 46
	0,5 to 5			46
	5 to 30			50
Apply A10.1 and A10.2 across the entire frequency range.				

7.4 EUT CONFIGURATION ON MEASUREMENT

The following equipments are installed on Conducted Emission Measurement to meet EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

7.5 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

7.6 TEST PROCEDURE

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.

The bandwidth of the Receiver (R&S ESCS30) is set at 9kHz in 150kHz~30MHz and 200Hz in

9kHz~150kHz.

The frequency range from 150kHz to 30MHz is investigated.

The results were obtained from the following equation

Result dB(uV):

Measurement Level dB(uV)= LISN factor(dB) +Cable Loss(dB) +Reading LeveldB(uV)

Note: LISN factor(dB) and Cable Loss(dB) are included Reading dB(uV) in test software.

Over(dB)= Emission Level dB(uV)- Limit dB(uV)


7.7 MEASURING RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

8 ASYMMETRIC MODE CONDUCTED EMISSIONS

8.1 BLOCK DIAGRAM OF TEST SETUP

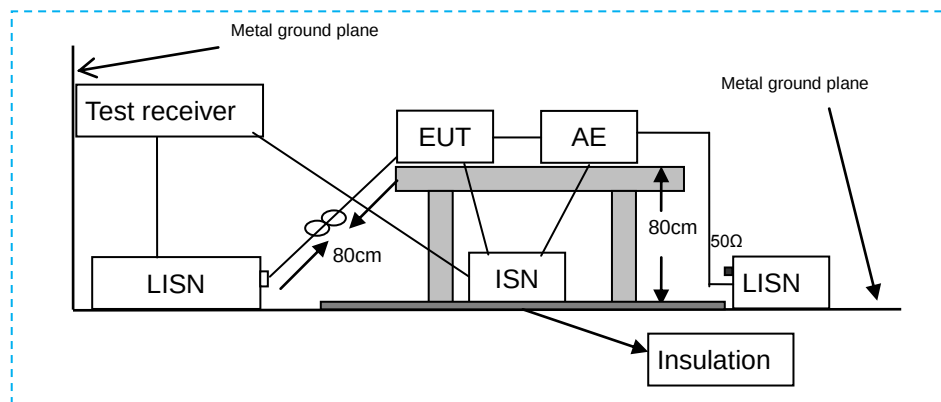

8.2 MEASURING STANDARD

ETSI EN 301 489-1 Clause 8.7

EN 55032: 2015 Clause A.3

8.3 CONDUCTED EMISSION LIMITS

Applicable to					
1. Wired Network Ports					
2. Optical Fibre Ports With Metallic Shield or Tension Members					
3. Broadcast Receiver Tuner Ports					
4. Antenna Ports					
Table clause	Frequency range MHz	Coupling device (see Table A.8)	Detector type / bandwidth	Class B voltage limits dB(μV)	Class B current limits dB(μA)
A12.1	0,15 to 0,5	AAN	Quasi Peak / 9 kHz	84 to 74	n/a
	0,5 to 30			74	
	0,15 to 0,5	AAN	Average / 9 kHz	74 to 64	
	0,5 to 30			64	
A12.2	0,15 to 0,5	CVP and current probe	Quasi Peak / 9 kHz	84 to 74	40 to 30
	0,5 to 30			74	30
	0,15 to 0,5	CVP and current probe	Average / 9 kHz	74 to 64	30 to 20
	0,5 to 30			64	20
A12.3	0,15 to 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	40 to 30
	0,5 to 30				30
	0,15 to 0,5	Current Probe	Average / 9 kHz		30 to 20
	0,5 to 30				20
The choice of coupling device and measurement procedure is defined in Annex C. Screened ports including TV broadcast receiver tuner ports are measured with a common-mode impedance of 150 Ω. This is typically accomplished with the screen terminated by 150 Ω to earth. AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.10. The measurement shall cover the entire frequency range. The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability. Measurement is required at only one EUT supply voltage and frequency. Applicable to ports listed above and intended to connect to cables longer than 3 m.					

8.4 EUT CONFIGURATION ON MEASUREMENT

The following equipments are installed on Conducted Emission Measurement to meet EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

8.5 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

8.6 TEST PROCEDURE

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N) or connected to the telecommunication port through an impedance stabilization network (ISN). L.I.S.N provided a 50ohm coupling impedance for the tested equipments AC mains port, I.S.N provided a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test. Both sides of AC line and telecommunication line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the Receiver (R&S ESCS30) is set at 9kHz in 150kHz~30MHz and 200Hz in 9kHz~150kHz.

The frequency range from 150kHz to 30MHz is investigated.

Result dB(uV):

Measurement Level dB(uV)= ISN factor(dB) +Cable Loss(dB) +Reading Level dB(uV)

Note: ISN factor(dB) and Cable Loss(dB) are included Reading dB(uV) in test software.

Over(dB)= Emission Level dB(uV)- Limit dB(uV)


8.7 MEASURING RESULTS

Not Applicable


9 RADIATED EMISSIONS

9.1 BLOCK DIAGRAM OF TEST SETUP

Below 1GHz

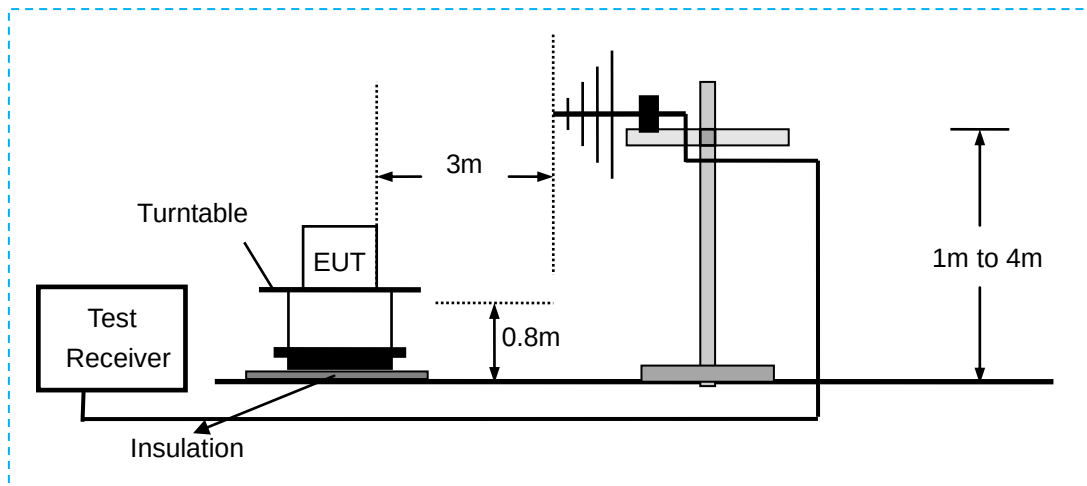

Above 1GHz

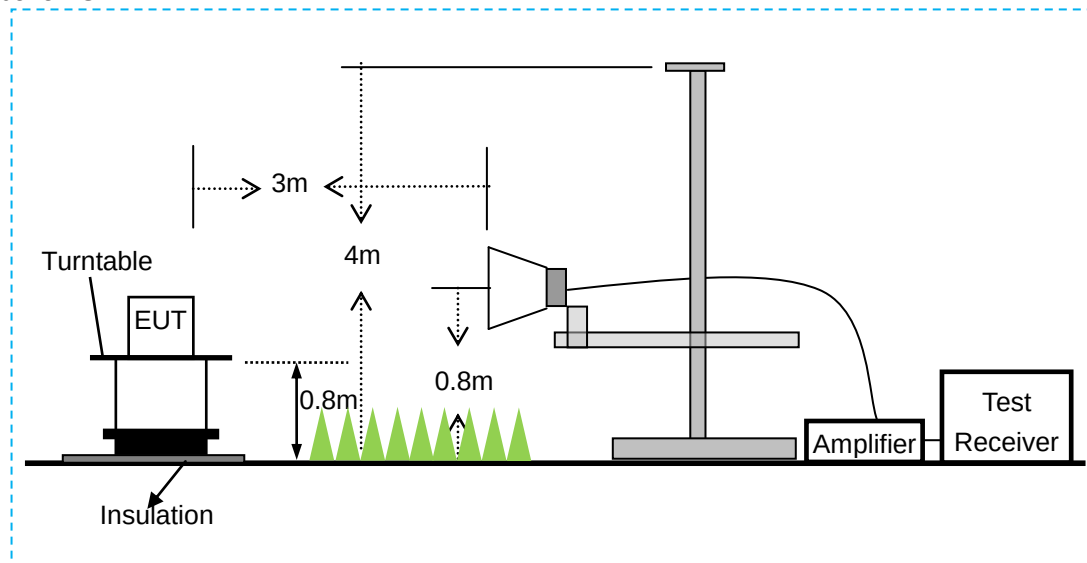

9.2 MEASURING STANDARD

ETSI EN 301 489-1 Clause 8.2
EN 55032: 2015 Clause A.2

9.3 RADIATED EMISSION LIMITS (CLASS B)

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Table clause	Frequency range MHz	Measurement			Class B limits dB(mV/m)
		Facility (see Table A.1)	Distance m	Detector type /bandwidth	
A4.1	30 to 230	OATS/SAC	10	Quasi Peak / 120 kHz	30
	230 to 1 000				37
A4.2	30 to 230	OATS/SAC	3		40
	230 to 1 000				47
A4.3	30 to 230	FAR	10	Quasi Peak / 120 kHz	32 to 25
	230 to 1 000				32
A4.4	30 to 230	FAR	3		42 to 35
	230 to 1 000				42
Apply only table clause A4.1 or A4.2 or A4.3 or A4.4 across the entire frequency range. These requirements are not applicable to the local oscillator and harmonics frequencies of equipment covered by Table A.6.					

Table clause	Frequency range MHz	Measurement			Class B limits dB(mV/m)
		Facility (see Table A.1)	Distance m	Detector type/ bandwidth	
A5.1	1 000 to 3 000	FSOATS	3	Average/ 1 MHz	50
	3 000 to 6 000				54
A5.2	1 000 to 3 000			Peak/ 1 MHz	70
	3 000 to 6 000				74
Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.					

9.4 EUT CONFIGURATION ON MEASUREMENT

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

9.5 OPERATING CONDITION OF EUT

Operating Condition of EUT is listed in section 4.4.

9.6 TEST PROCEDURE

The EUT is placed on a turntable which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 and 10 meters away from the receiving antenna that is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) and horn antenna are used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

ResultdB(uV/m):

Measurement Level dB(uV/m)= Antenna factor(dB) –Amp Factor +Cable Loss(dB) +Reading Level dB(uV)

Note: Antenna factor(dB) and Cable Loss(dB) are included Correct factor(dB) in test software.

Margin QP(db)=Reading Level dB(uV/m)- Limit dB(uV/m) for 30~1GHz
Over(db)= Emission Level dB(uV/m)- Limit dB(uV/m) for above 1GHz

The bandwidth of the Receiver is set at 120 kHz (For 30MHz to 1000MHz).
The resolution bandwidth of the receiver RS ESU26 was set at 1MHz ((For above 1GHz.).
The frequency range for 1GHz to 6GHz was checked with peak and average detector, measurement distance is 3m in 3m Anechoic chamber.

The frequency range for 30MHz to 1GHz was checked with Quasi-peak detector, measurement distance is 3m in 3m semi-chamber.


9.7 MEASURING RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

10 HARMONIC CURRENT EMISSION TEST

10.1 BLOCK DIAGRAM OF TEST SETUP

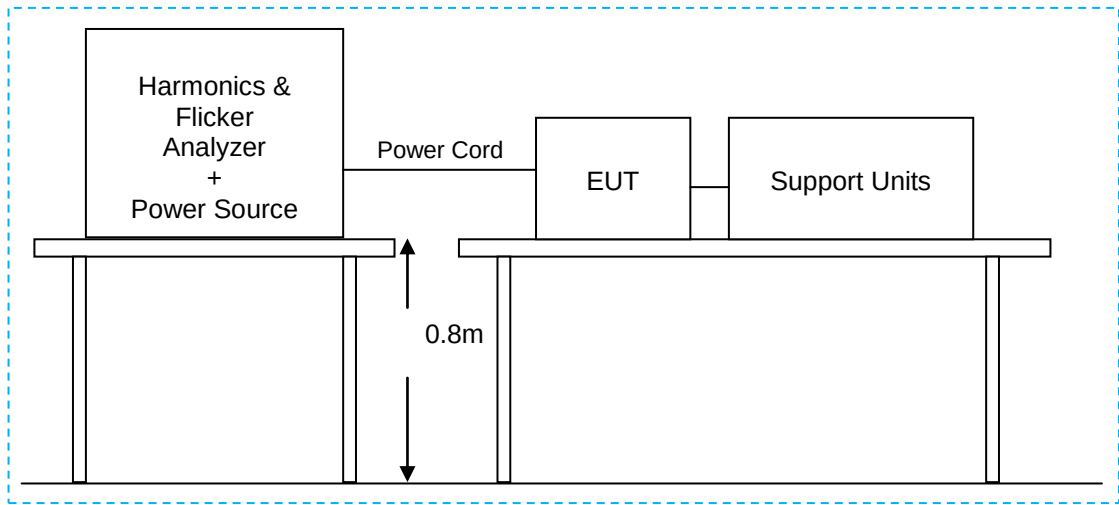

10.2 MEASURING STANDARD

ETSI EN 301 489-1 Clause 8.5
EN 61000-3-2

10.3 OPERATION CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.


10.4 MEASURING RESULTS

N/A

Note: According to clause 7 of EN 61000-3-2, equipment with a rated power of 75W or less, no limits apply.

11 VOLTAGE FLUCTUATION AND FLICKER TESTS

11.1 BLOCK DIAGRAM OF TEST SETUP

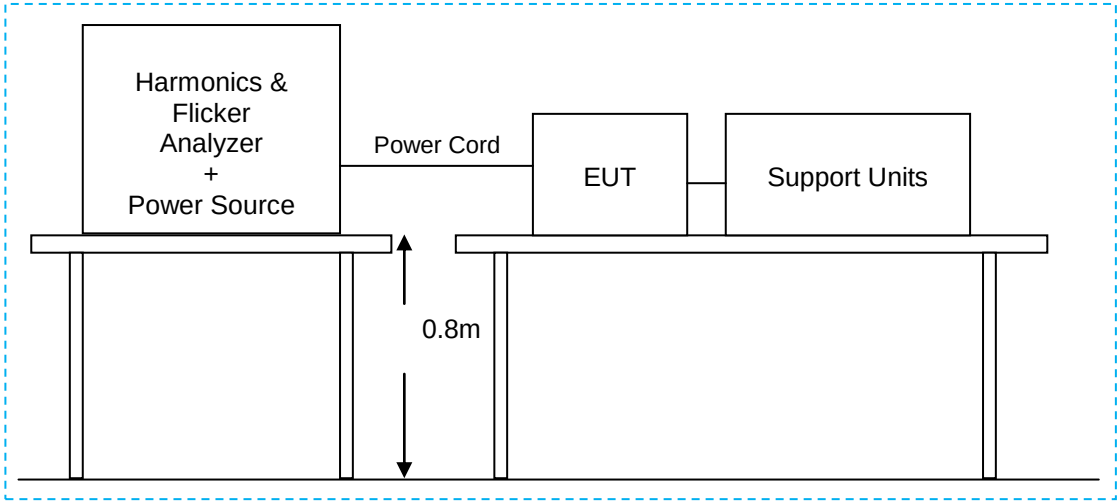

11.2 MEASURING STANDARD

ETSI EN 301 489-1 Clause 8.6
EN 61000-3-3

11.3 OPERATION CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

11.4 MEASURING RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

12 PERFORMANCE CRITERIA

12.1 GENERAL PERFORMANCE CRITERIA

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

The equipment shall meet the minimum performance criteria as specified in the following clauses.

12.2 PERFORMANCE TABLE

Criteria	During test	After test
A	Shall operate as intended. (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 3). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 2). Shall be no unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3).
NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended. NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended. NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.		

12.3 PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTERS (CT)

The performance criteria A shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK) or Not ACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

12.4 PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTERS (TT)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

12.5 PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVERS (CR)

The performance criteria A shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.


12.6 PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVERS (TR)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

13 ELECTROSTATIC DISCHARGE

13.1 BLOCK DIAGRAM OF TEST SETUP

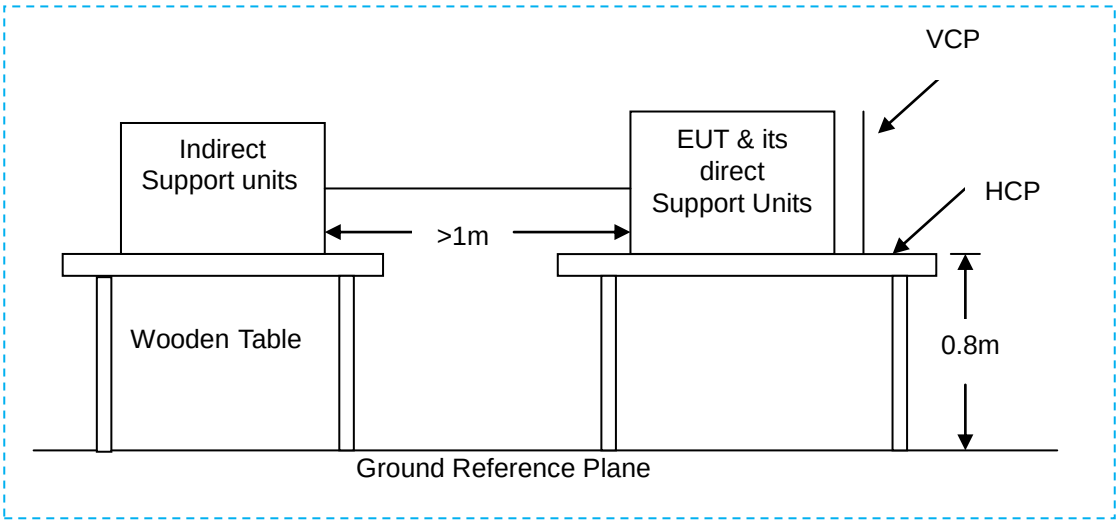

13.2 TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.3 and EN 61000-4-2

13.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

13.3.1 SEVERITY LEVEL

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1	±2	±2
2	±4	±4
3	±6	±8
4	±8	±15
X	Special	Special

13.3.2 PERFORMANCE CRITERION

☐ CT	☒ TT	☐ CR	☒ TR
-----------------------------	--	-----------------------------	--

13.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

13.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.3.2 and EN 61000-4-2 for the measurement methods.


13.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

14 RADIO FREQUENCY ELECTROMAGNETIC FIELD

14.1 BLOCK DIAGRAM OF TEST SETUP

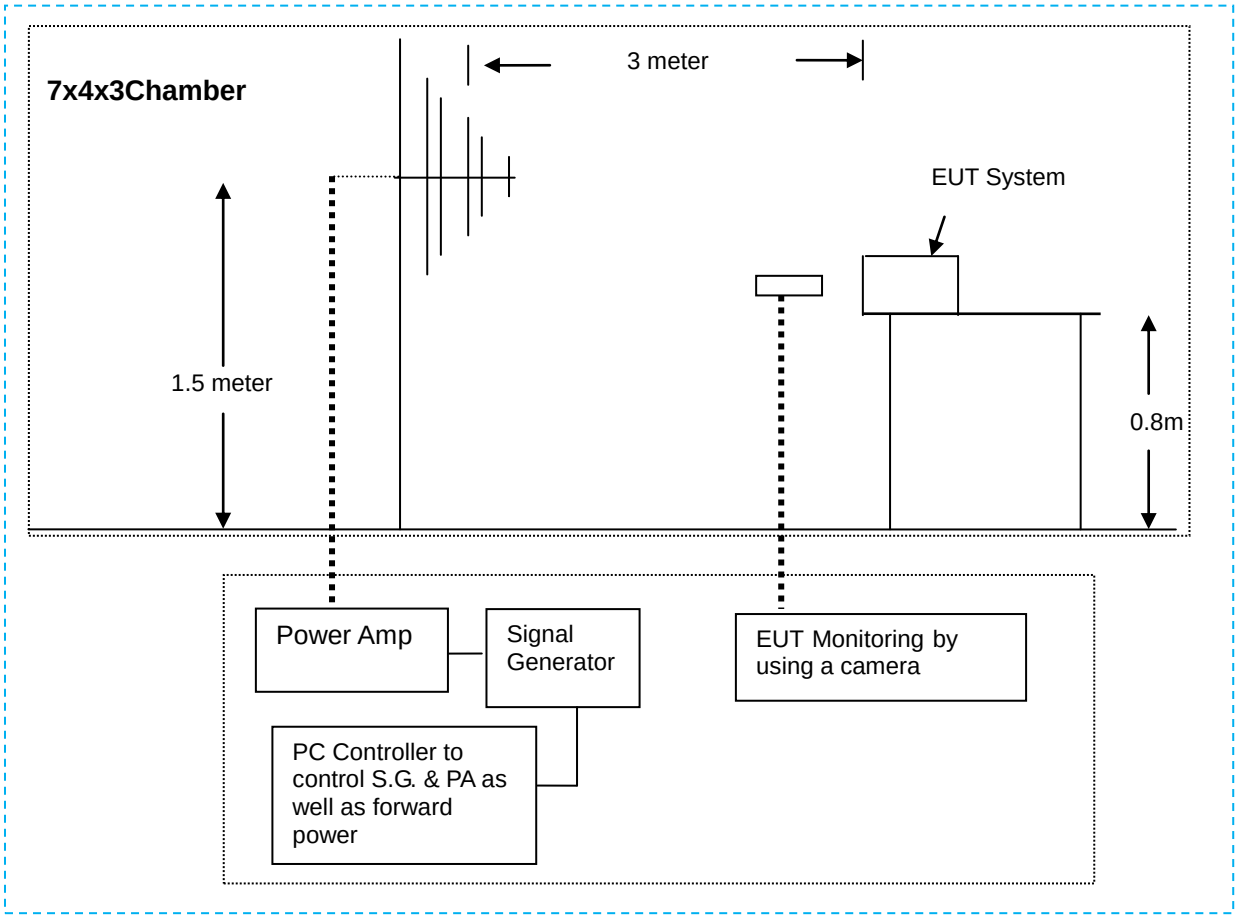

14.2 TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.2 and EN 61000-4-3

14.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

14.3.1 SEVERITY LEVELS

Level	Field Strength V/m
1	1
2	3
3	10
X	Special

14.3.2 PERFORMANCE CRITERION

☒ CT	☐ TT	☒ CR	☐ TR
--	-----------------------------	--	-----------------------------

14.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

14.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.2.2 and EN 61000-4-3 for the measurement methods.


14.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

15 FAST TRANSIENTS, COMMON MODE

15.1BLOCK DIAGRAM OF TEST SETUP

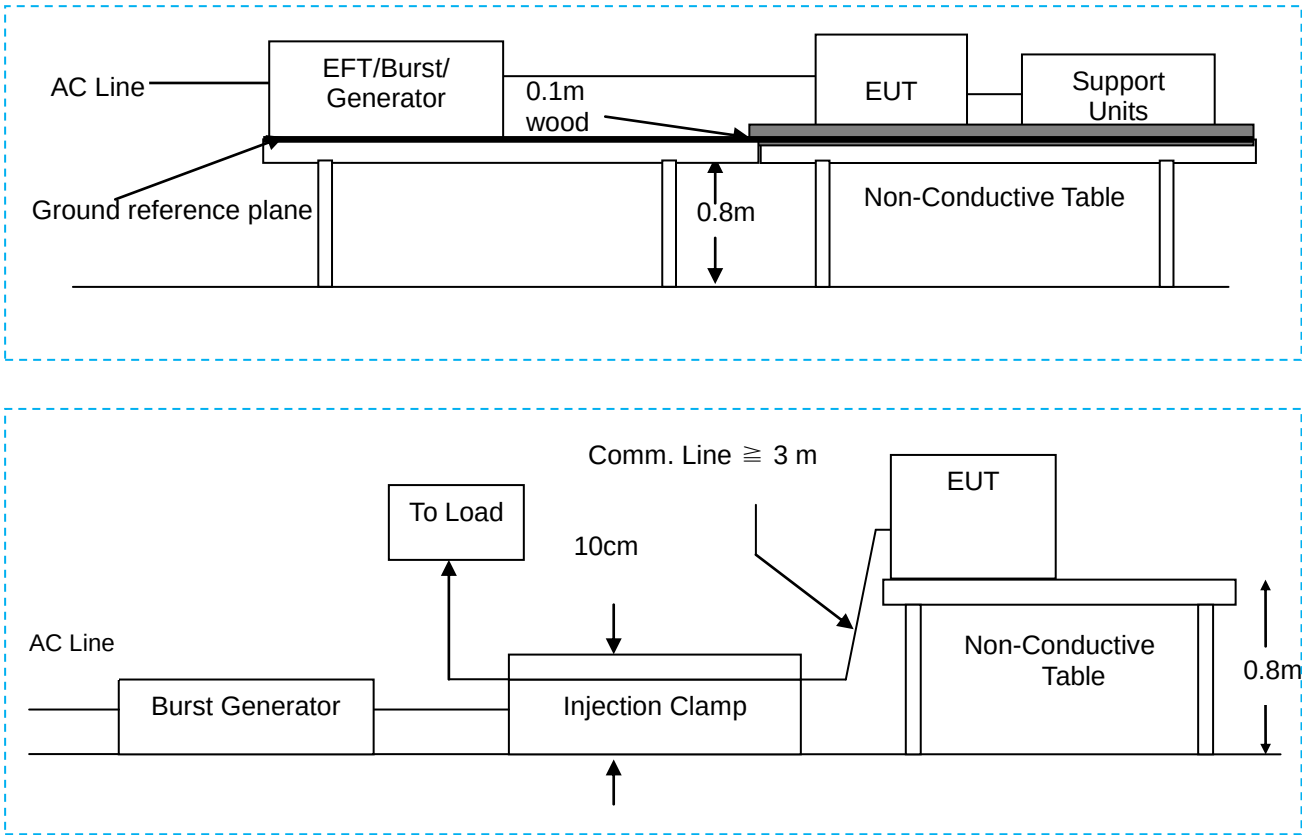

15.2TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.4 and EN 61000-4-4

15.3SEVERITY LEVELS AND PERFORMANCE CRITERION

15.3.1 SEVERITY LEVEL

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

15.3.2 Performance criterion

☐ CT	☒ TT	☐ CR	☒ TR
-----------------------------	--	-----------------------------	--

15.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

15.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.4.2 and EN 61000-4-4 for the measurement methods.


15.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

16 SURGE

16.1 BLOCK DIAGRAM OF TEST SETUP

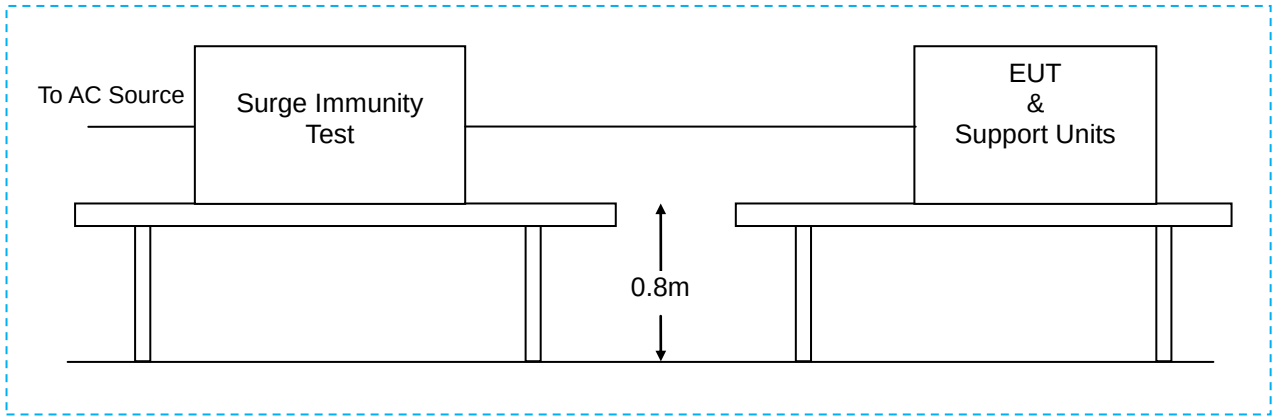

16.2 TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.8 and EN 61000-4-5

16.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

16.3.1 SEVERITY LEVEL

Severity Level	Open-Circuit Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

16.3.2 PERFORMANCE CRITERION

☐ CT	☒ TT	☐ CR	☒ TR
-----------------------------	--	-----------------------------	--

16.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

16.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.8.2 and EN 61000-4-5 for the measurement methods.


16.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

17 RADIO FREQUENCY, COMMON MODE

17.1 BLOCK DIAGRAM OF TEST SETUP

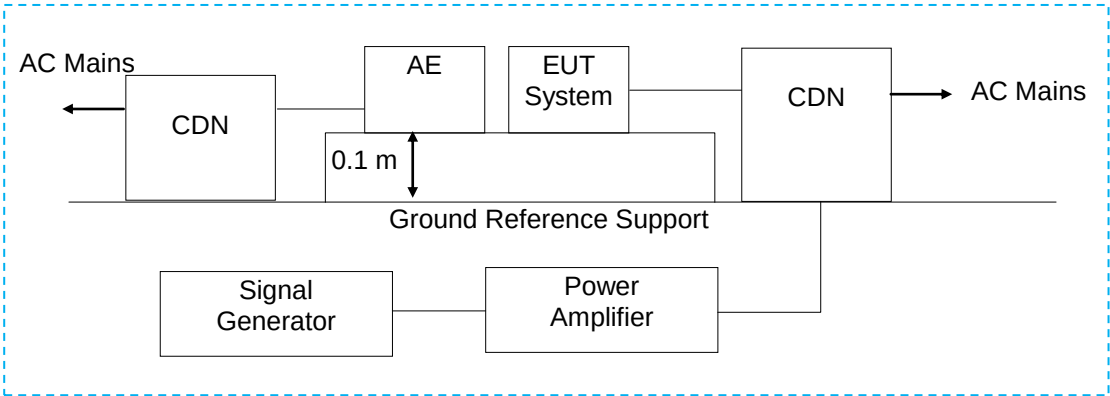

17.2 TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.5 and EN 61000-4-6

17.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

17.3.1 Severity level

Level	Field Strength V
1	1
2	3
3	10
X	Special

17.3.2 Performance criterion

☒ CT	☐ TT	☒ CR	☐ TR
--	-----------------------------	--	-----------------------------

17.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

17.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.5.2 and EN 61000-4-6 for the measurement methods.


17.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

18 VOLTAGE DIPS AND INTERRUPTIONS

18.1 BLOCK DIAGRAM OF TEST SETUP

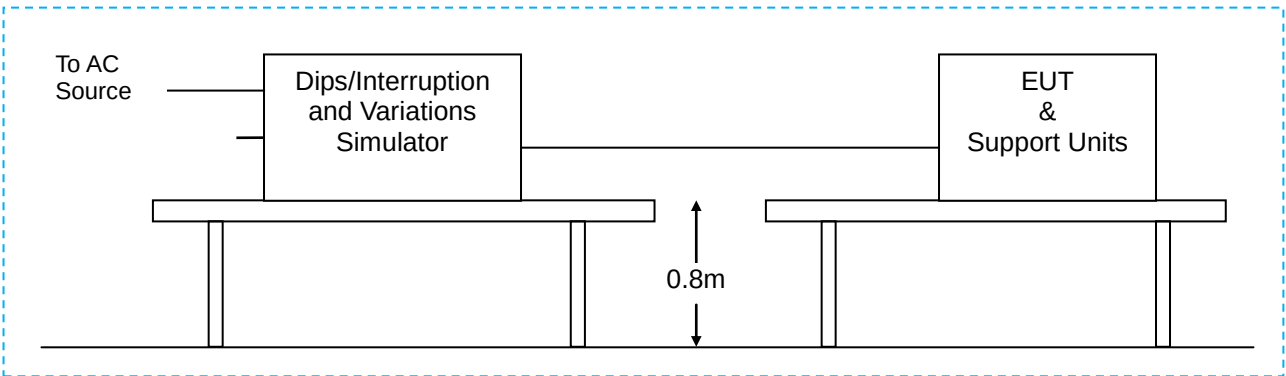

18.2 TEST STANDARD

According to ETSI EN 301 489-1 Clause 9.7 and EN 61000-4-11

18.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

18.3.1 SEVERITY LEVEL

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)	Performance criterion
0	100	0.5	B
0	100	1	B
70	30	25	C
0	100	250	C

18.3.2 Performance criterion

☐ CT	☒ TT	☐ CR	☒ TR
-----------------------------	--	-----------------------------	--

18.4 OPERATING CONDITION OF EUT

Operating Condition of EUT are listed in section 4.4.

18.5 TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.7.2 and EN 61000-4-11 for the measurement methods.


18.6 TEST RESULTS

PASS.

All of the Configurations were tested,
the data of the worst case are recorded in the appendix A.

19 APPENDIX A TEST DATA

19.1 WORST DATA FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS(BT LINK)

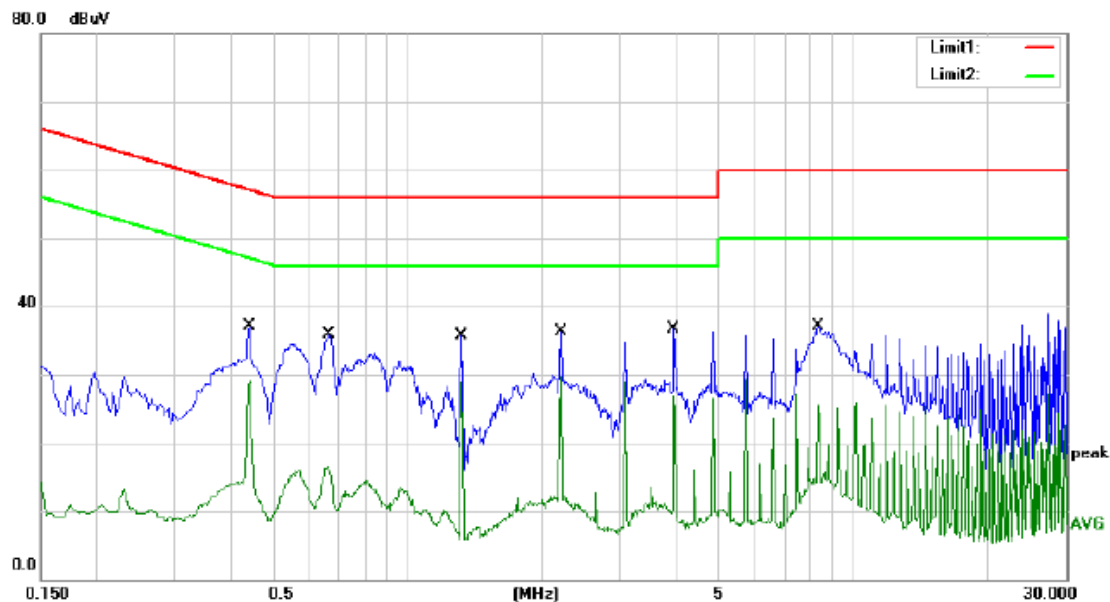

Site site #1

Phase: L1

Temperature: 25

Limit: (CE)EN301489_QP

Power: AC 230V/50Hz


Humidity: 55 %

Mode: BT Mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4420	24.27	9.83	34.10	57.02	-22.92	QP	
2		0.4420	19.17	9.83	29.00	47.02	-18.02	AVG	
3		0.6620	6.74	9.84	16.58	46.00	-29.42	AVG	
4		0.6660	23.08	9.84	32.92	56.00	-23.08	QP	
5		1.3220	22.95	9.84	32.79	56.00	-23.21	QP	
6		1.3220	18.98	9.84	28.82	46.00	-17.18	AVG	
7		2.2020	23.49	9.84	33.33	56.00	-22.67	QP	
8	*	2.2020	19.94	9.84	29.78	46.00	-16.22	AVG	
9		3.9620	23.79	9.85	33.64	56.00	-22.36	QP	
10		3.9620	17.03	9.85	26.88	46.00	-19.12	AVG	
11		8.3660	24.25	9.94	34.19	60.00	-25.81	QP	
12		8.3660	15.52	9.94	25.46	50.00	-24.54	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:

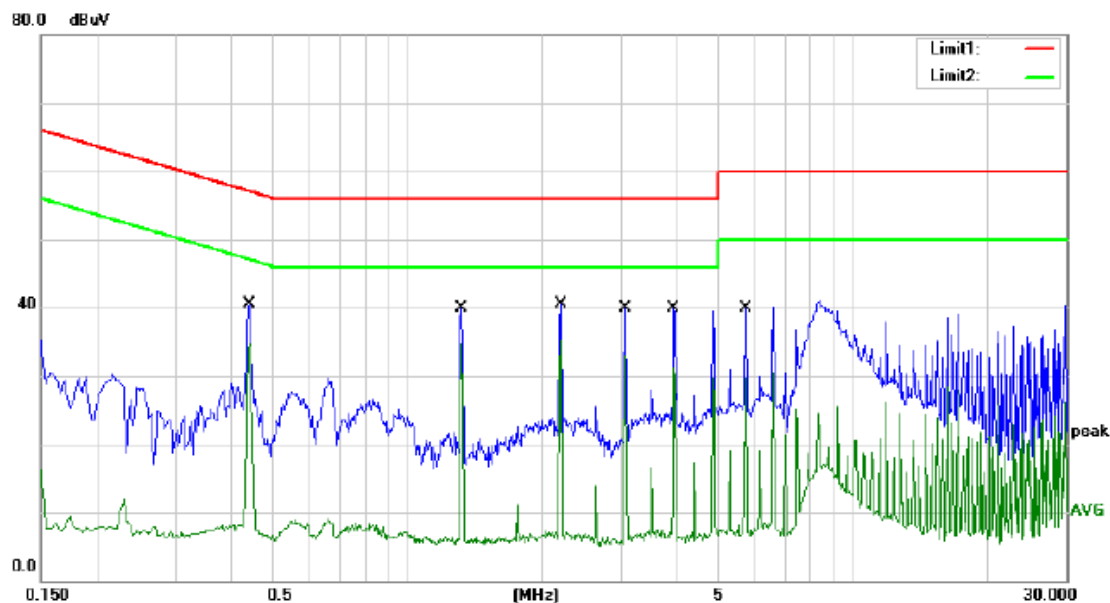

Site site #1

Phase: N

Temperature: 25

Limit: (CE)EN301489_QP

Power: AC 230V/50Hz

Humidity: 55 %


Mode: BT Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4420	27.65	9.83	37.48	57.02	-19.54	QP	
2		0.4420	24.96	9.83	34.79	47.02	-12.23	AVG	
3		1.3220	27.14	9.84	36.98	56.00	-19.02	QP	
4		1.3220	24.81	9.84	34.65	46.00	-11.35	AVG	
5		2.2020	27.73	9.84	37.57	56.00	-18.43	QP	
6	*	2.2020	25.37	9.84	35.21	46.00	-10.79	AVG	
7		3.0820	26.97	9.85	36.82	56.00	-19.18	QP	
8		3.0820	23.13	9.85	32.98	46.00	-13.02	AVG	
9		3.9620	26.99	9.85	36.84	56.00	-19.16	QP	
10		3.9620	21.37	9.85	31.22	46.00	-14.78	AVG	
11		5.7260	27.07	9.87	36.94	60.00	-23.06	QP	
12		5.7260	19.80	9.87	29.67	50.00	-20.33	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:


19.2 DATA FOR RADIATED EMISSIONS (THE WORST OF TEST MODE (WIRELESS CHARGING (FULL LOAD)))

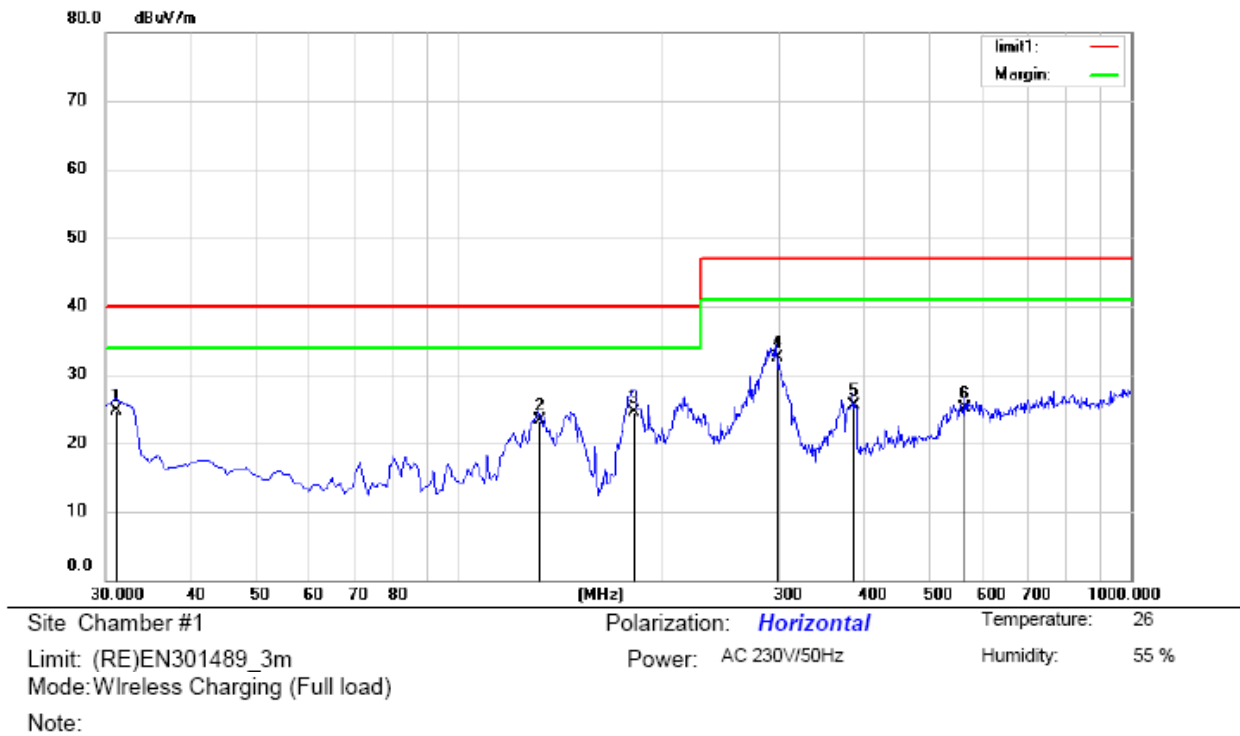

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.9700	43.60	-18.88	24.72	40.00	-15.28	QP		
2		131.8500	44.65	-21.40	23.25	40.00	-16.75	QP		
3		182.5592	43.65	-19.19	24.46	40.00	-15.54	QP		
4	*	297.7200	46.30	-13.88	32.42	47.00	-14.58	QP		
5		386.9600	36.85	-11.25	25.60	47.00	-21.40	QP		
6		565.4400	32.50	-7.34	25.16	47.00	-21.84	QP		

*:Maximum data x:Over limit !:over margin

Operator:

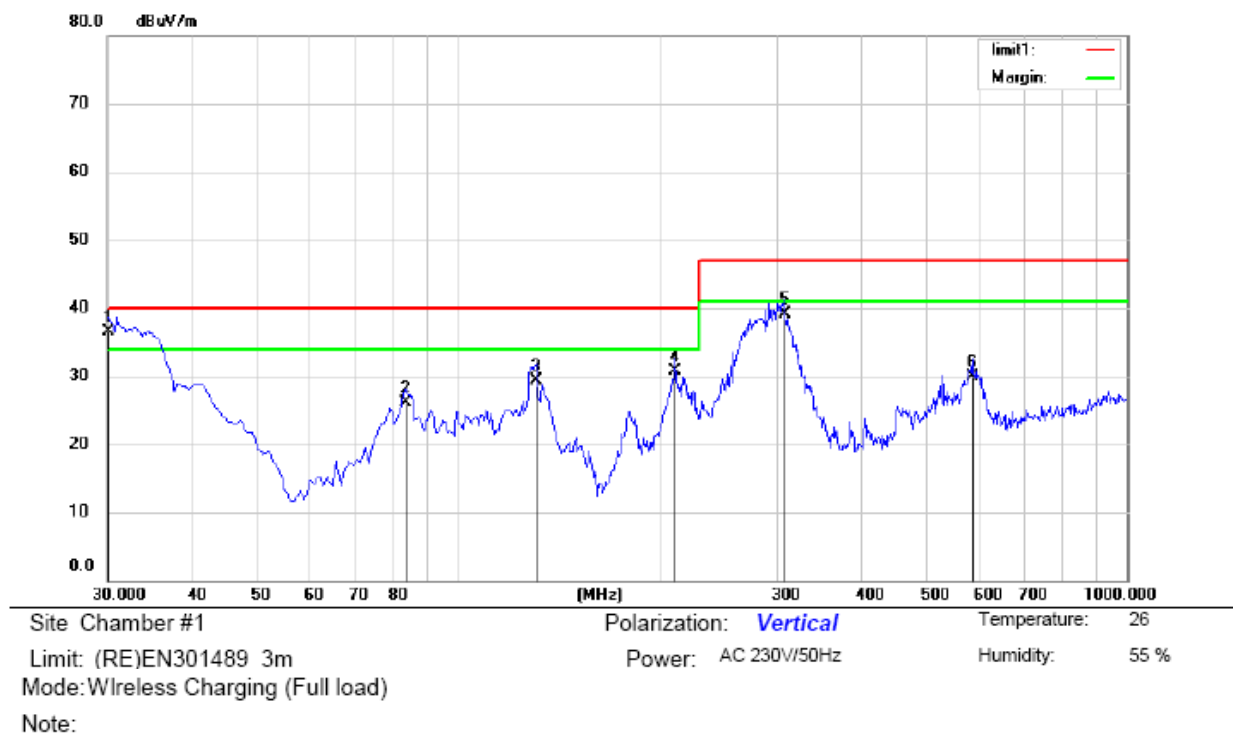


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	30.0000	55.20	-18.76	36.44	40.00	-3.56	QP	
2		83.3500	48.60	-22.45	26.15	40.00	-13.85	QP	
3		130.8800	48.69	-19.37	29.32	40.00	-10.68	QP	
4		211.3900	48.00	-17.38	30.62	40.00	-9.38	QP	
5		307.4200	53.60	-14.51	39.09	47.00	-7.91	QP	
6		587.7500	37.40	-7.56	29.84	47.00	-17.16	QP	

*:Maximum data x:Over limit !:over margin

Operator:

19.3 DATA FOR RADIATED EMISSIONS (THE WORST OF TEST MODE (BT MODE))

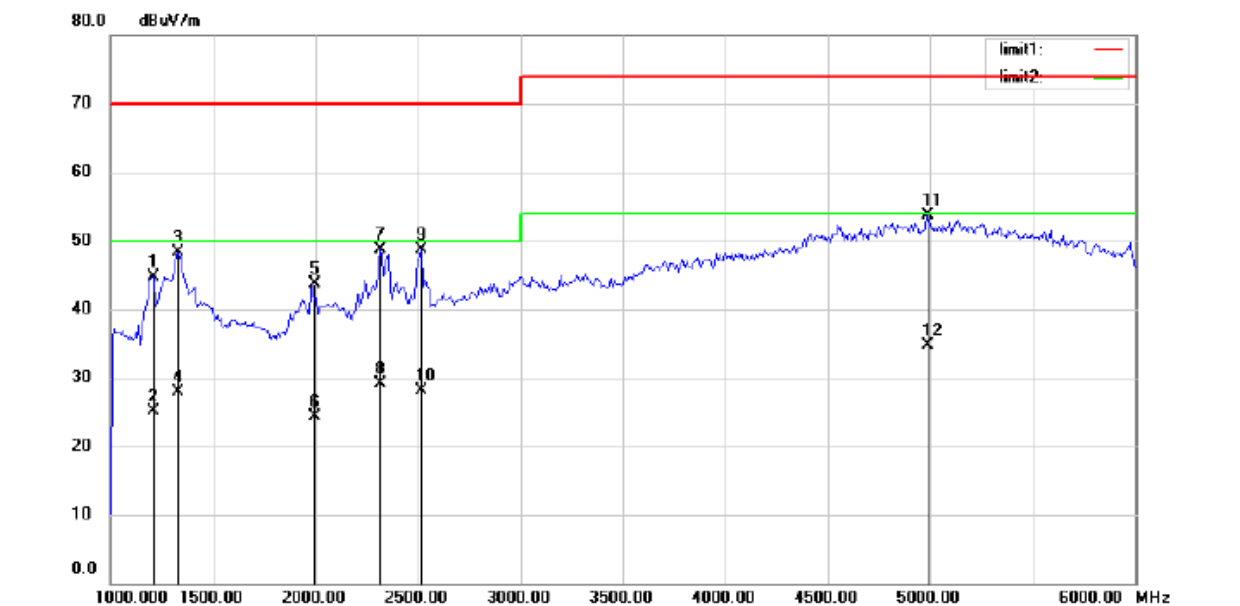

Site Chamber #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)EN301489_3m

Power: AC 230V/50Hz

Humidity: 53 %

Mode: BT Mode


Note:

DYS

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		1208.333	57.82	-13.18	44.64	70.00	-25.36	peak	
2		1208.333	38.27	-13.18	25.09	50.00	-24.91	AVG	
3		1328.525	61.05	-12.77	48.28	70.00	-21.72	peak	
4		1328.525	40.68	-12.77	27.91	50.00	-22.09	AVG	
5		1985.577	54.44	-10.70	43.74	70.00	-26.26	peak	
6		1985.577	35.07	-10.70	24.37	50.00	-25.63	AVG	
7		2314.102	58.13	-9.52	48.61	70.00	-21.39	peak	
8		2314.102	38.66	-9.52	29.14	50.00	-20.86	AVG	
9		2514.423	57.52	-8.79	48.73	70.00	-21.27	peak	
10		2514.423	36.91	-8.79	28.12	50.00	-21.88	AVG	
11		4982.372	54.14	-0.51	53.63	74.00	-20.37	peak	
12	*	4982.372	35.29	-0.51	34.78	54.00	-19.22	AVG	

*:Maximum data x:Over limit !:over margin

Operator: DK

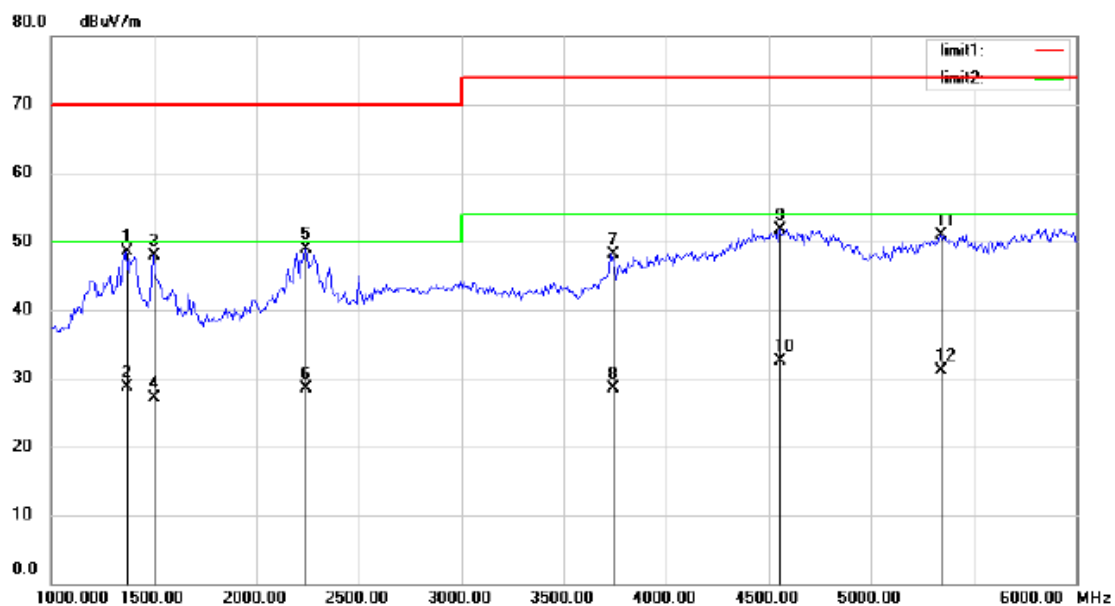

Site Chamber #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)EN301489 3m
Mode: BT Mode

Power: AC 230V/50Hz

Humidity: 53 %

Note:

DYS

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		1360.577	60.06	-11.54	48.52	70.00	-21.48	peak	
2		1360.577	40.19	-11.54	28.65	50.00	-21.35	AVG	
3		1496.795	59.72	-11.73	47.99	70.00	-22.01	peak	
4		1496.795	38.93	-11.73	27.20	50.00	-22.80	AVG	
5	*	2241.987	57.29	-8.46	48.83	70.00	-21.17	peak	
6		2241.987	36.97	-8.46	28.51	50.00	-21.49	AVG	
7		3732.372	53.95	-5.76	48.19	74.00	-25.81	peak	
8		3732.372	34.29	-5.76	28.53	54.00	-25.47	AVG	
9		4557.692	55.48	-3.74	51.74	74.00	-22.26	peak	
10		4557.692	36.27	-3.74	32.53	54.00	-21.47	AVG	
11		5334.936	52.93	-2.03	50.90	74.00	-23.10	peak	
12		5334.936	33.20	-2.03	31.17	54.00	-22.83	AVG	

*:Maximum data x:Over limit !:over margin

Operator: DK

19.4DATA FOR VOLTAGE FLUCTUATIONS & FLICKER TESTS

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

EUT: Home speaker with wireless charger
Test category: All parameters (European limits)
Test date: 2018-7-23
14:17:54
Test duration (min): 10
Comment: ON
Customer: Ningbo Cstar Imp & Exp CO., LTD

Tested by: Lin
Test Margin: 100
Start time: 14:07:27 End time:


Data file name: P328.12X.cts_data

Test Result: Pass

Status: Test Completed

Psti and limit line

European Limits

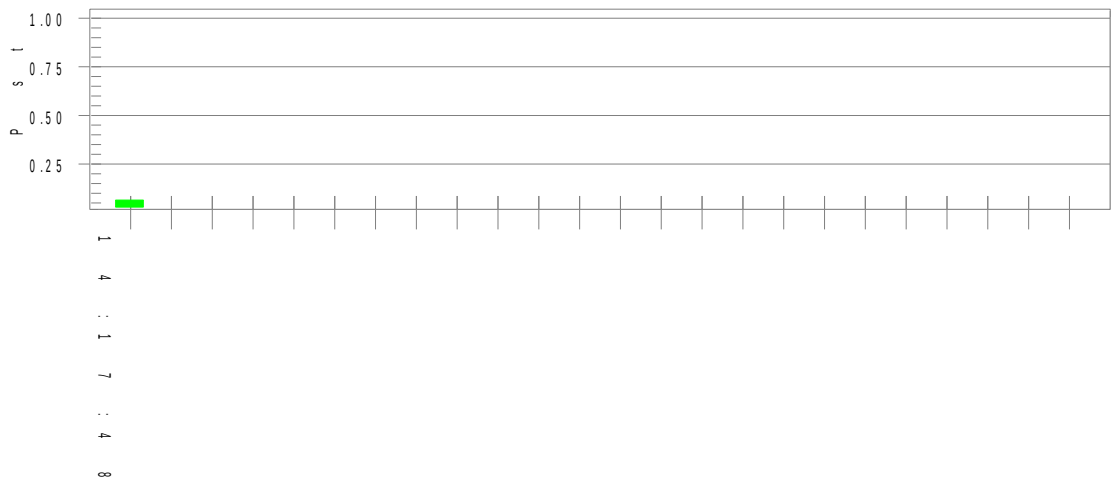

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.88		
T-max (mS):	0.00	Test limit (mS):500.0	Pass
Highest dc (%):	0.00	Test limit (%): 3.30	Pass
Highest dmax (%):	0.00	Test limit (%): 4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass

19.5 DATA FOR ELECTROSTATIC DISCHARGE

Electrostatic Discharge Test Results

EMTEK(SHENZHEN) CO.,LTD

Applicant	LISONG ELECTRONICS CO.,LTD		
EUT	Home speaker with wireless charger	Test Date	July 28, 2018
M/N	P328.12X	Temperature	22°C
Power Supply	AC 230V/50Hz, Battery 3.7V	Humidity	50%
Air discharge	±2.0, ± 4.0 kV, ± 8.0kV	Test engineer	CSL
Contact discharge	± 2.0, ± 4.0kV	Criterion	TT&TR
Test Mode	BT Link, BT Idle,Wireless Charging		
Location		Kind A-Air Discharge C-Contact Discharge	Result
Case		A	CT&CR
Interface		A	CT&CR
gap		A, C	CT&CR
HCP of front, rear, left, right		C	CT&CR
VCP of front, rear, left, right		C	CT&CR
Note: N/A			

19.6 DATA FOR RADIO FREQUENCY ELECTROMAGNETIC FIELD

Radio-Frequency, Electromagnetic Field Test Results Test Results

EMTEK(SHENZHEN) CO.,LTD

Applicant	LISONG ELECTRONICS CO.,LTD			
EUT	Home speaker with wireless charger	Test Date	July 28, 2018	
M/N	P328.12X	Temperature	22℃	
Field Strength	3 V/m	Humidity	50%	
Power Supply	AC 230V/50Hz, Battery 3.7V	Criterion	CT&CR	
Test engineer	CSL	Frequency Range	80MHz to 6000MHz	
Modulation	☐ None	☐ Pulse	☒ AM 1kHz 80%	
Steps	1%			
Test Mode	BT Link, BT Idle,Wireless Charging			
	Horizontal	Vertical	Horizontal	Vertical
Front	CT&CR	CT&CR		
Right	CT&CR	CT&CR		
Rear	CT&CR	CT&CR		
Left	CT&CR	CT&CR		
Note:				

19.7 DATA FOR FAST TRANSIENTS, COMMON MODE

Fast Transients, Common Mode Test Results

EMTEK(SHENZHEN) CO.,LTD

Applicant	LISONG ELECTRONICS CO.,LTD		
EUT	Home speaker with wireless charger	Test Date	July 28, 2018
M/N	P328.12X	Temperature	22℃
Input Voltage	AC 230V/50Hz	Humidity	58%
Test Engineer	CSL	Criterion	TT&TR
Line :	☒ AC Mains ☐ DC Line	Line :	☒ Signal ☐ I/O Cable
Coupling :	☒ Direct	Coupling :	☒ Capacitive
Test Time :	120s		
OperationMode	BT Link, BT Idle,Wireless Charging		
Line	Test Voltage	Result(+)	Result(-)
☒ L	1kV	CT&CR	CT&CR
☒ N	1kV	CT&CR	CT&CR
☐ PE	0.5/1kV		
☒ L 、 N	1kV	CT&CR	CT&CR
☐ L 、 PE	0.5/1kV		
☐ N 、 PE	0.5/1kV		
☐ L 、 N 、 PE	0.5/1kV		
☐ Signal Line	0.5kV		
Note:			

19.8 DATA FOR SURGE

Surge Test Results EMTEK(SHENZHEN) CO.,LTD

Applicant	LISONG ELECTRONICS CO.,LTD				
EUT	Home speaker with wireless charger		Test Date	July 28, 2018	
M/N	P328.12X		Temperature	22℃	
Power Supply	AC 230V/50Hz		Humidity	50%	
Test engineer	CSL		Criterion	TT&TR	
Test Mode	BT Link, BT Idle,Wireless Charging				
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result
☒ L-N	+	0°	5	1.0	CT&CR
	+	90°	5	1.0	CT&CR
	+	180°	5	1.0	CT&CR
	+	270°	5	1.0	CT&CR
	-	0°	5	1.0	CT&CR
	-	90°	5	1.0	CT&CR
	-	180°	5	1.0	CT&CR
	-	270°	5	1.0	CT&CR
☐ L-PE	+	0°	5	1.0/2.0	
	+	90°	5	1.0/2.0	
	+	180°	5	1.0/2.0	
	+	270°	5	1.0/2.0	
	-	0°	5	1.0/2.0	
	-	90°	5	1.0/2.0	
	-	180°	5	1.0/2.0	
	-	270°	5	1.0/2.0	
☐ N-PE	+	0°	5	1.0/2.0	
	+	90°	5	1.0/2.0	
	+	180°	5	1.0/2.0	
	+	270°	5	1.0/2.0	
	-	0°	5	1.0/2.0	
	-	90°	5	1.0/2.0	
	-	180°	5	1.0/2.0	
	-	270°	5	1.0/2.0	
☐ Signal Line	+		5	0.5/1.0	
	-		5	0.5/1.0	
Note: * Means the network interrupt.					

19.9 DATA FOR RADIO FREQUENCY, COMMON MODE**Radio frequency, common mode Test Results****EMTEK(SHENZHEN) CO.,LTD**

Applicant	LISONG ELECTRONICS CO.,LTD			
EUT	Home speaker with wireless charger	Test Date	July 28, 2018	
M/N	P328.12X	Temperature	22℃	
Power Supply	AC 230V/50Hz	Humidity	58%	
Test Engineer	CSL	Criterion	TT&TR	
Test Mode	BT Link, BT Idle,Wireless Charging			
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	☒ AC Mains	3V	TT&TR	CT&CR
0.15 ~ 80	☐ Signal line	3V	TT&TR	
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
Remark : 1. Modulation Signal:1kHz 80% AM		Note:		

19.10 DATA FOR VOLTAGE DIPS AND INTERRUPTIONS

Voltage Dips and Interruptions Test Results

EMTEK(SHENZHEN) CO.,LTD


Applicant	LISONG ELECTRONICS CO.,LTD				
EUT	Home speaker with wireless charger		Test Date	July 28, 2018	
M/N	P328.12X		Temperature	22℃	
Power Supply	AC 230V/50Hz		Humidity	50%	
Test Engineer	CSL		Criterion	TT&TR	
Test Mode	BT Link, BT Idle,Wireless Charging				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Phase Angle	Criterion TT&TR	Result
0	100	0.5P	0°-360°	TT&TR	CT&CR
0	100	1P	0°-360°	TT&TR	CT&CR
70	30	25P	0°-360°	TT&TR	CT&CR
0	100	250P	0°-360°	TT&TR	TT&TR
Note: * Means EUT Shut down, lost function. It should be recoverable by operator.					

20 APPENDIX B PHOTOGRAPHS OF TEST SETUP

20.1 PHOTO FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS



20.2 PHOTO FOR RADIATED EMISSIONS

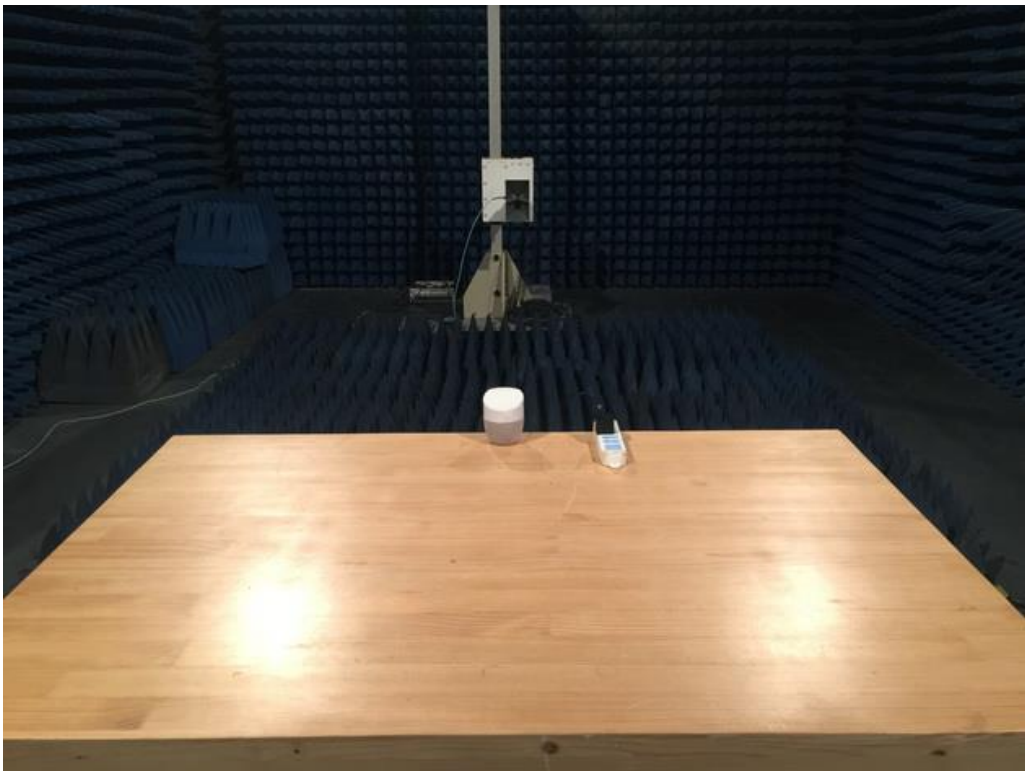




20.3 PHOTO FOR VOLTAGE FLUCTUATIONS & FLICKER TESTS







20.4PHOTO FOR ELECTROSTATIC DISCHARGE

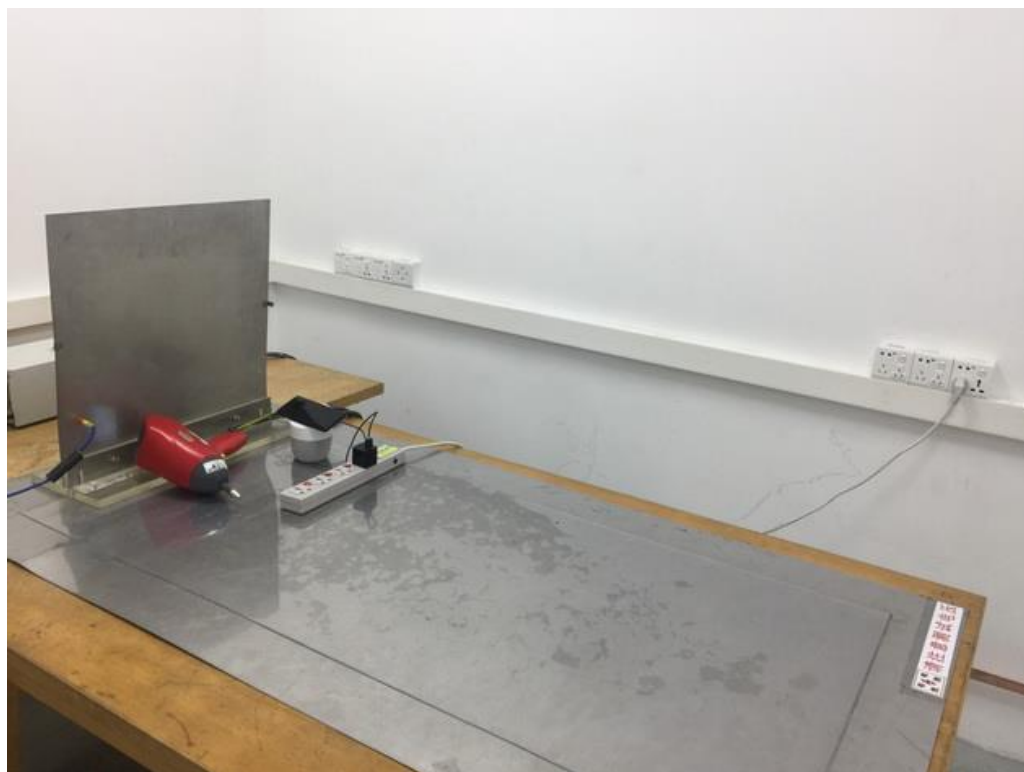


20.5 PHOTO FOR RADIO FREQUENCY ELECTROMAGNETIC FIELD

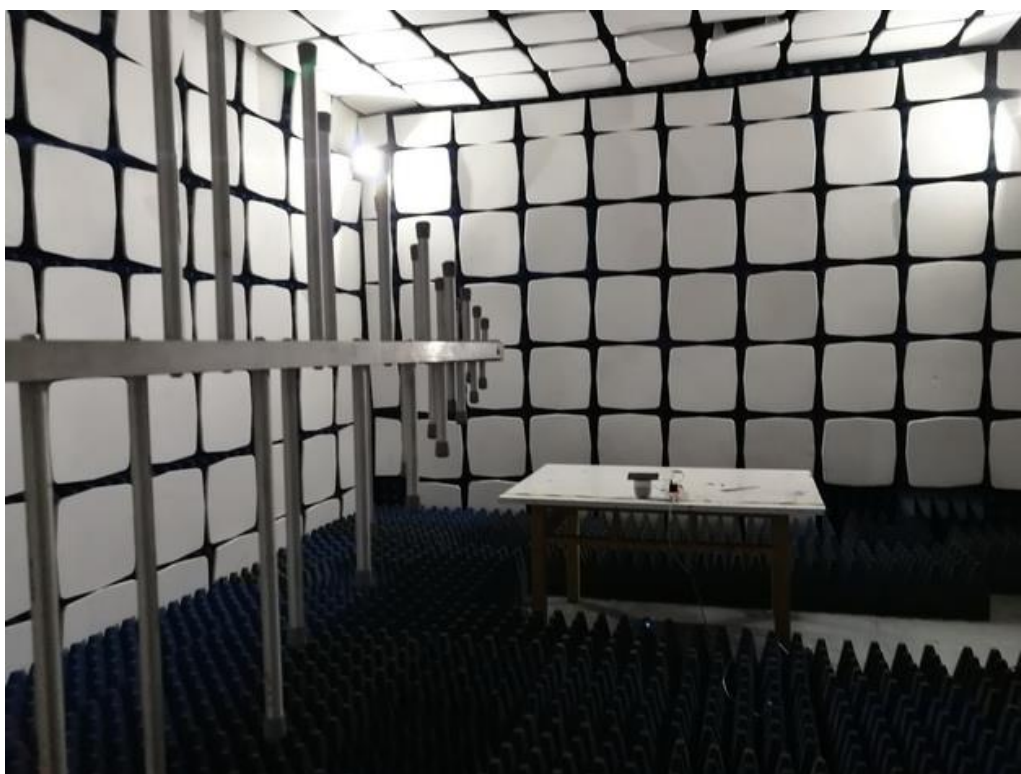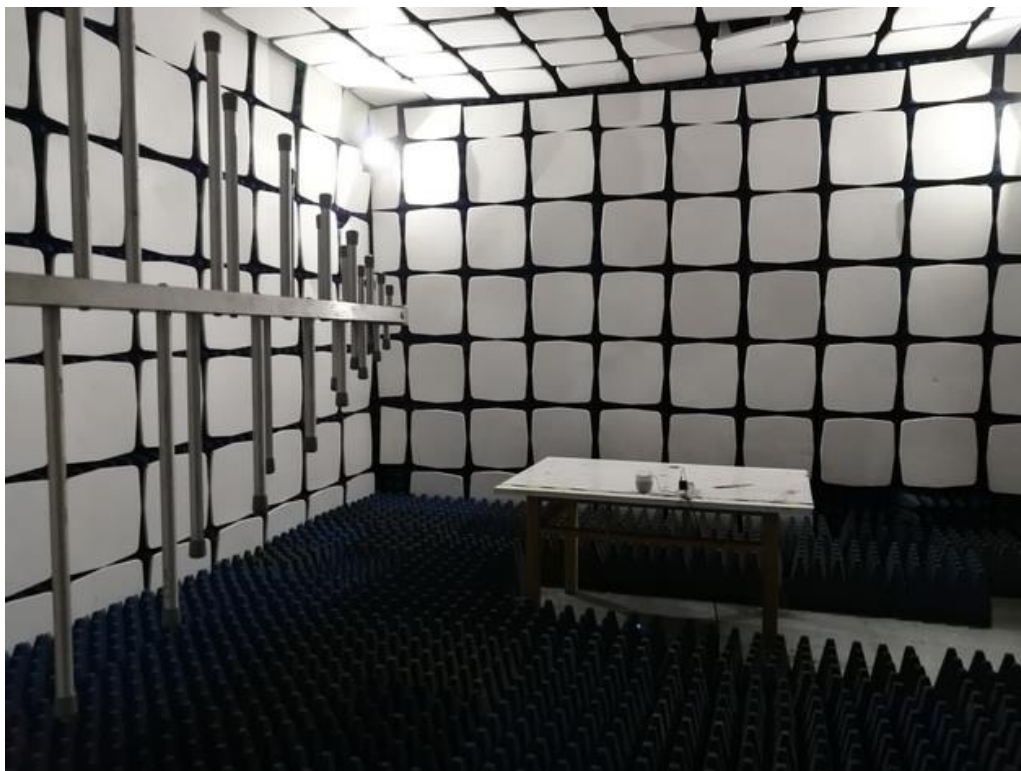

20.6 PHOTO FOR FAST TRANSIENTS, COMMON MODE



20.7PHOTO FOR SURGE

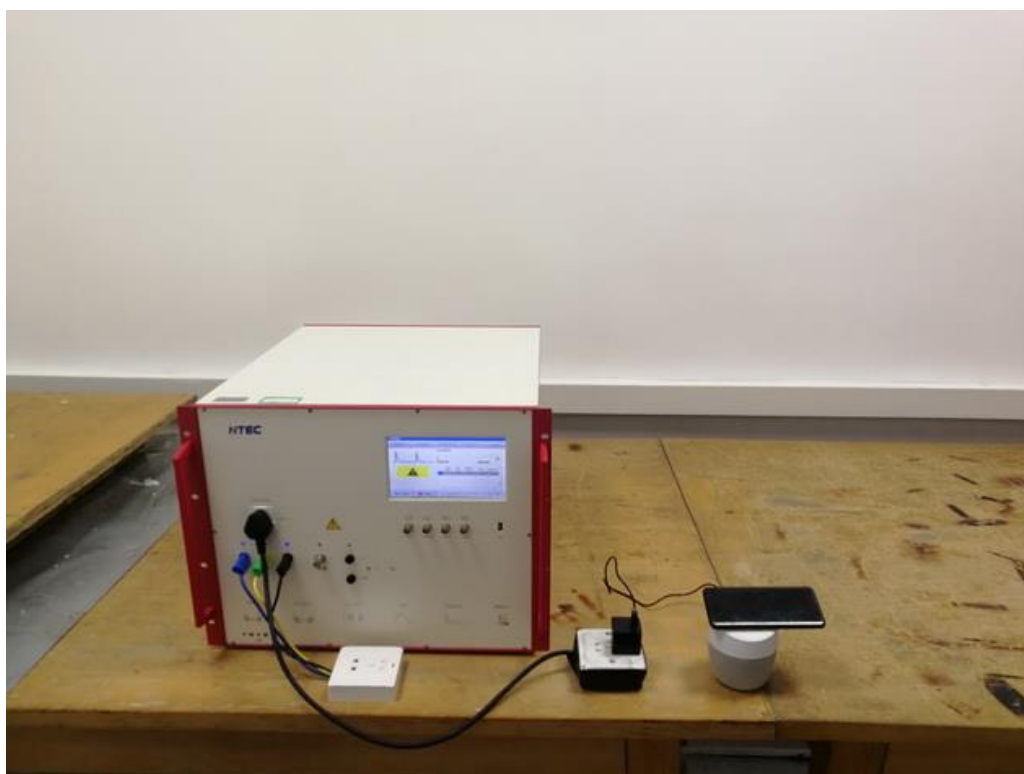

20.8 PHOTO FOR RADIO FREQUENCY, COMMON MODE







20.9 PHOTO FOR VOLTAGE DIPS AND INTERRUPTIONS




21 APPENDIX C PHOTOGRAPHS OF EUT



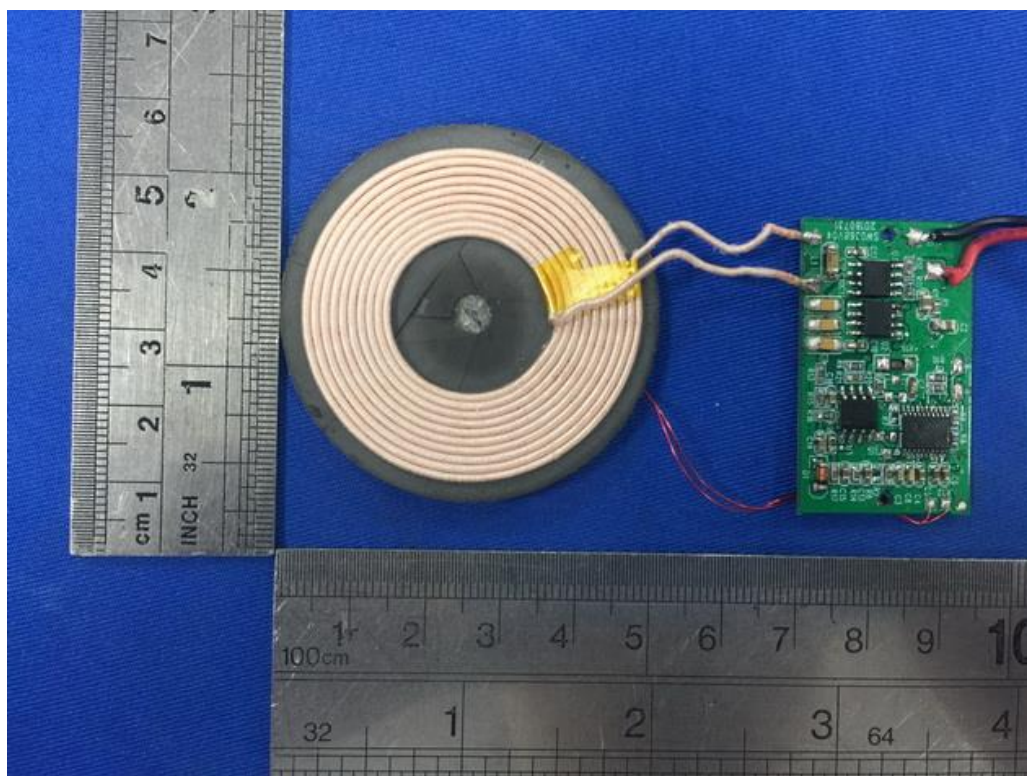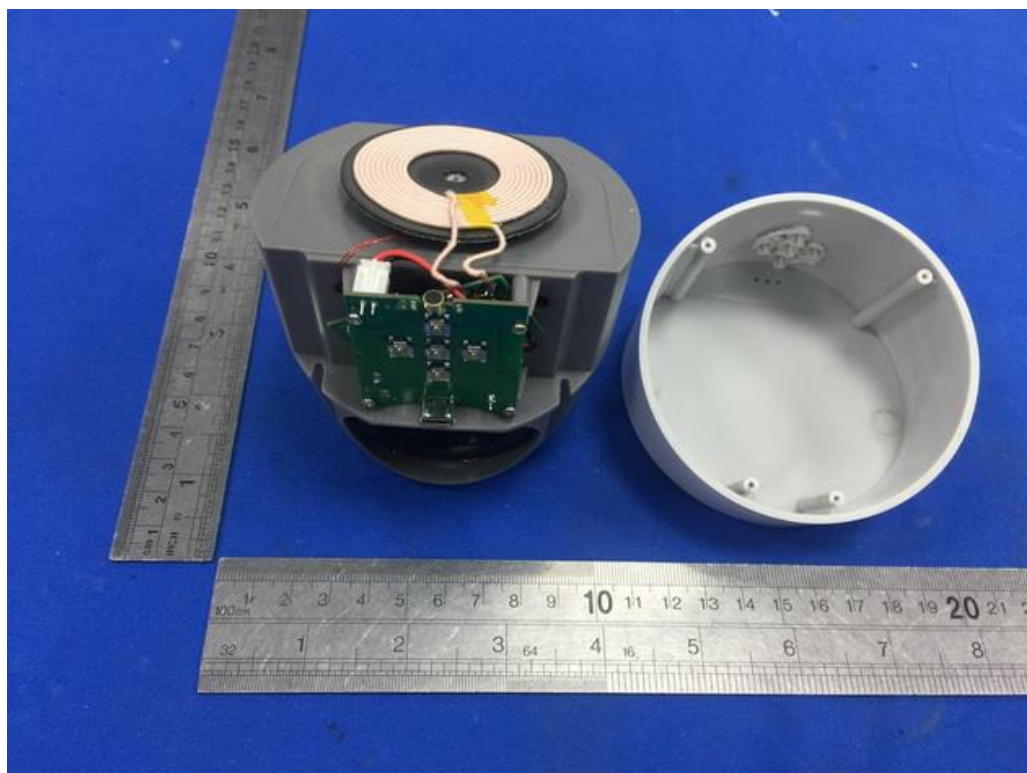

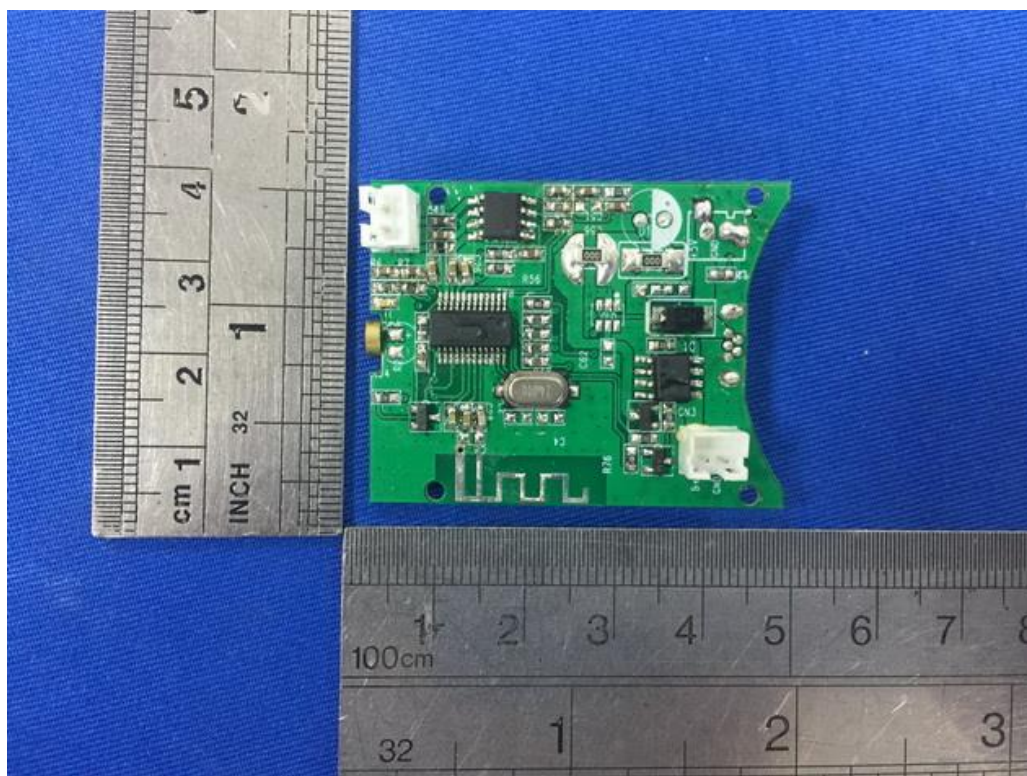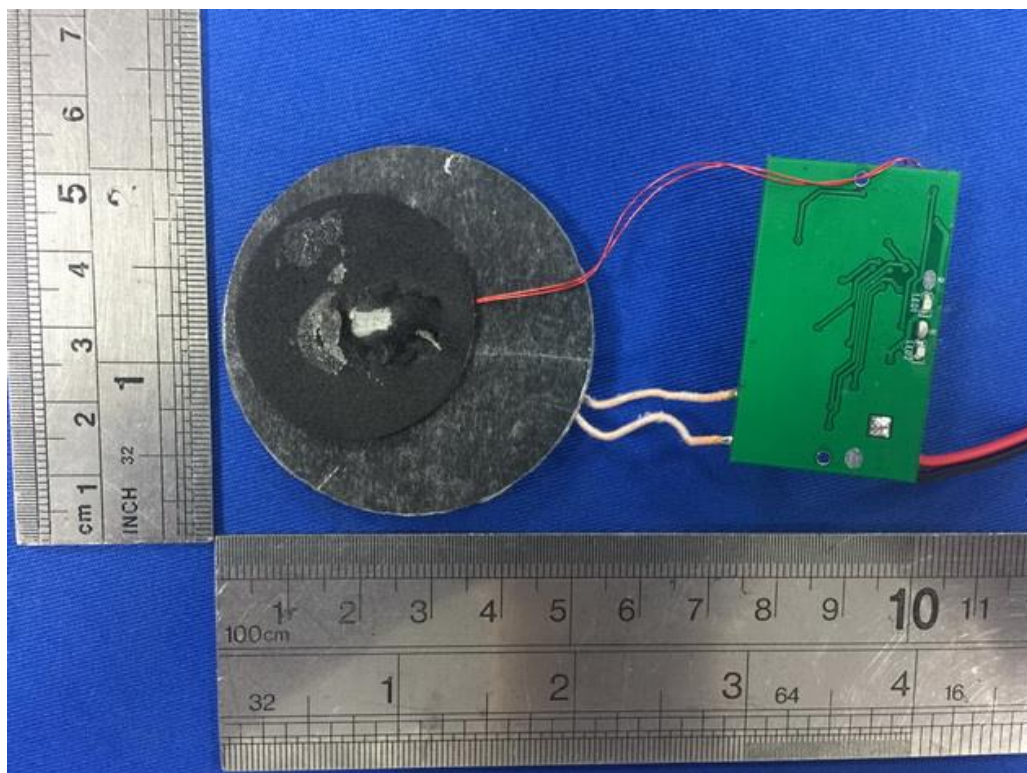

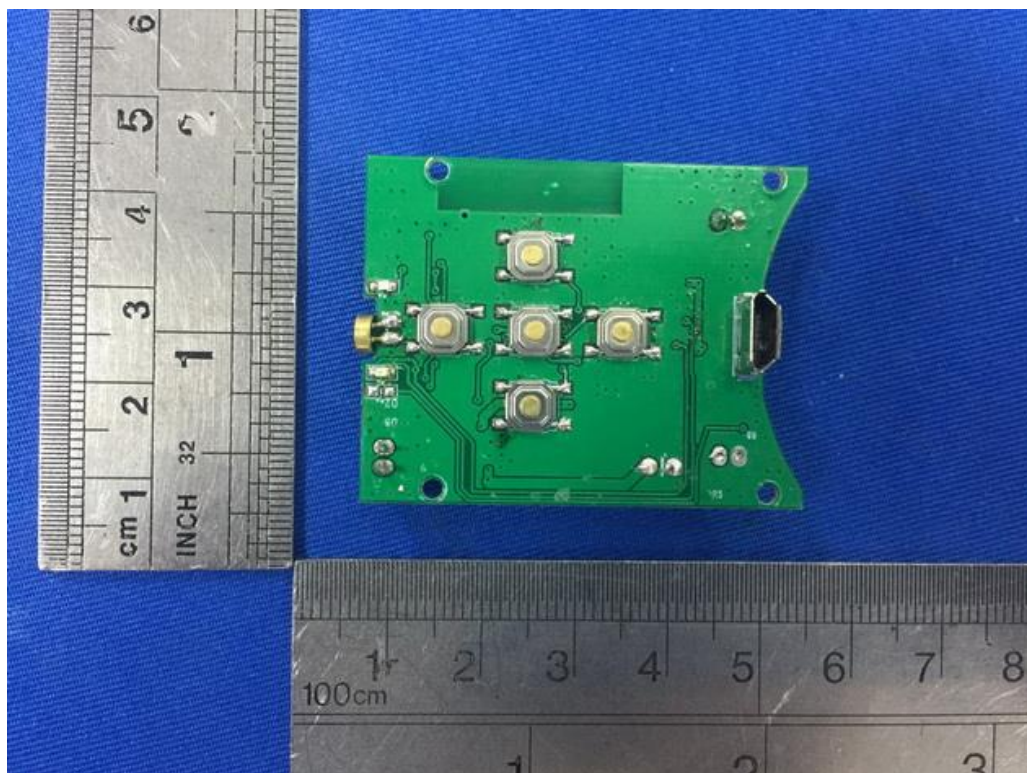

END OF REPORT