

RED-Health Test Report

For

Wireless power bank

Model No.: MSL-M617Q

Prepared For :

Address :

Prepared For : Shenzhen Anbotech Compliance Laboratory Limited

Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180524005-03H

Date of Test : May 24~Jun. 05, 2018

Date of Report : Jun. 05, 2018

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-01-25. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.



Contents

1. GENERAL INFORMATION.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used during Test.....	4
1.4. Description of Test Facility.....	5
1.5. Measurement Uncertainty.....	5
2. GENERAL PRODUCT INFORMATION.....	6
2.1 Basic Restriction.....	6
2.2 Table for Filed Antenna.....	6
3.TEST RESULT.....	7
3.1 EMF Exposure Measurement.....	7
3.2 Detailed results.....	10

TEST REPORT

Applicant :
Manufacturer :
Product Name : Wireless power bank
Model No. : MSL-M617Q
Trade Mark : N.A.
Rating(s) : Input: DC 5V, 2A (with DC 3.7V, 5000mAh Battery inside)
USB Output: DC 5V, 2A
Type-C Output: DC 5V, 2A
Wireless Output: DC 5V, 1A

Test Standard(s) : EN 62311: 2008

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the ETSI EN 62311:2008 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Test


May 24~Jun. 05, 2018

Prepared By





(Engineer / May Lu)

Reviewer


(Supervisor / Calvin Liu)

Approved & Authorized Signer


(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Client Information

Applicant	:	
Address	:	
Manufacturer	:	
Address	:	

1.2. Description of Device (EUT)

Product Name	:	Wireless power bank	
Model No.	:	MSL-M617Q	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 230V, 50Hz for adapter	
Product Description	:	Operation Frequency:	110-205KHz
		Number of Channel:	20 Channels
		Modulation Type:	FSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer’ s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used during Test

N/A	:	
-----	---	--

1.4. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

1.5. Measurement Uncertainty

Radiation Uncertainty

Ur = 3.9 dB (Horizontal)

Ur = 3.8 dB (Vertical)

Conduction Uncertainty

Uc = 3.4 dB

Disturbance Uncertainty

Ud = 2.6 dB

2. GENERAL PRODUCT INFORMATION

2.1 Basic Restriction

The essential requirements of Directive 99/5/EC in the article 3.1(a) and the limits must be taken from Council Recommendation 99/519/EC for General Population or from the ICNIRP Guidelines for Occupational Exposure. EN 50371:2002 Generic standard to demonstrate the compliance of low power electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields. The average power of EUT is less than 20mW then comply with basic restriction (1999/519/EC) without test.

2.2 Table for Filed Antenna

Ant.	Antenna Type	Gain (dBi)
1.	Inductive loop coil Antenna	0

3. TEST RESULT

3.1 EMF Exposure Measurement

3.1.1 Limit

Basic Restrictions

Council Recommendation 99/519/EC Annex II

Basic restrictions for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz)

Frequency range	Magnetic flux density (mT)	Current density (mA/m ²) (rms)	Whole body average SAR (W/kg)	Localized SAR (head and trunk) (W/kg)	Localized SAR (limbs) (W/kg)	Power density, S (W/m ²)
0Hz	40	-	-	-	-	-
>0-1Hz	-	8	-	-	-	-
1-4Hz	-	8/f	-	-	-	-
4Hz-1000Hz	-	2	-	-	-	-
1000Hz-100kHz	-	f/500	-	-	-	-
100kHz-10MHz	-	f/500	0.08	2	4	-
10MHz-10GHz	-	-	0.08	2	4	-
10GHz-300GHz	-	-	-	-	-	10


Note:

1. f is the frequency in Hz.
2. The basic restriction on the current density is intended to protect against acute exposure effects on central nervous system tissues in the head and trunk of the body and includes a safety factor. The basic restrictions for ELF fields are based on established adverse effects on the central nervous system. Such acute effects are essentially instantaneous and there is no scientific justification to modify the basic restrictions for exposure of short duration. However, since the basic restriction refers to adverse effects on the central nervous system, this basic restriction may permit higher current densities in body tissues other than the central nervous system under the same exposure conditions.
3. Because of electrical inhomogeneity of the body, current densities should be averaged over a cross section of 1 cm² perpendicular to the current direction.
4. For frequencies up to 100kHz, peak current density values can be obtained by multiplying the rms value by $\sqrt{2}$ (=1.414). For pulses of duration t_p the equivalent frequency to apply in the basic restrictions should be calculated as $1/(2t_p)$.

5. For frequencies up to 100kHz and for pulsed magnetic fields, the maximum current density associated with the pulses can be calculated from the rise/fall times and the maximum rate of change of magnetic flux density. The induced current density can then be compared with the appropriate basic restriction.
6. All SAR values are to be averaged over any six-minute period.
7. Localised SAR averaging Mass is any 10g of contiguous tissue; the maximum SAR so obtained should be the value used for the estimation of exposure. These 10g of tissue are intended to be a mass of contiguous tissue with nearly homogeneous electrical properties. In specifying a contiguous mass of tissue, it is recognized that this concept can be used in computational dissymmetry but may present difficulties for direct physical measurements. A simple geometry such as cubic tissue mass can be used provided that the calculated dissymmetric quantities have conservative values relative to the exposure guidelines.
8. For pulses of duration t_p the equivalent frequency to apply in the basic restrictions should be calculated as $f_{eq} = 1/(2t_p)$. Additionally, for pulsed exposures, in the frequency range 0.3 to 10GHz and for localized exposure of the head, in order to limit and avoid auditory effects caused by thermoplastic expansion, an additional basic restriction is recommended. This is that the SA should not exceed 2 mJ kg^{-1} averaged over 10g of tissue.

3.1.2. Evaluation Routine

Low Power Electronic Apparatus for RF exposure evaluation routine

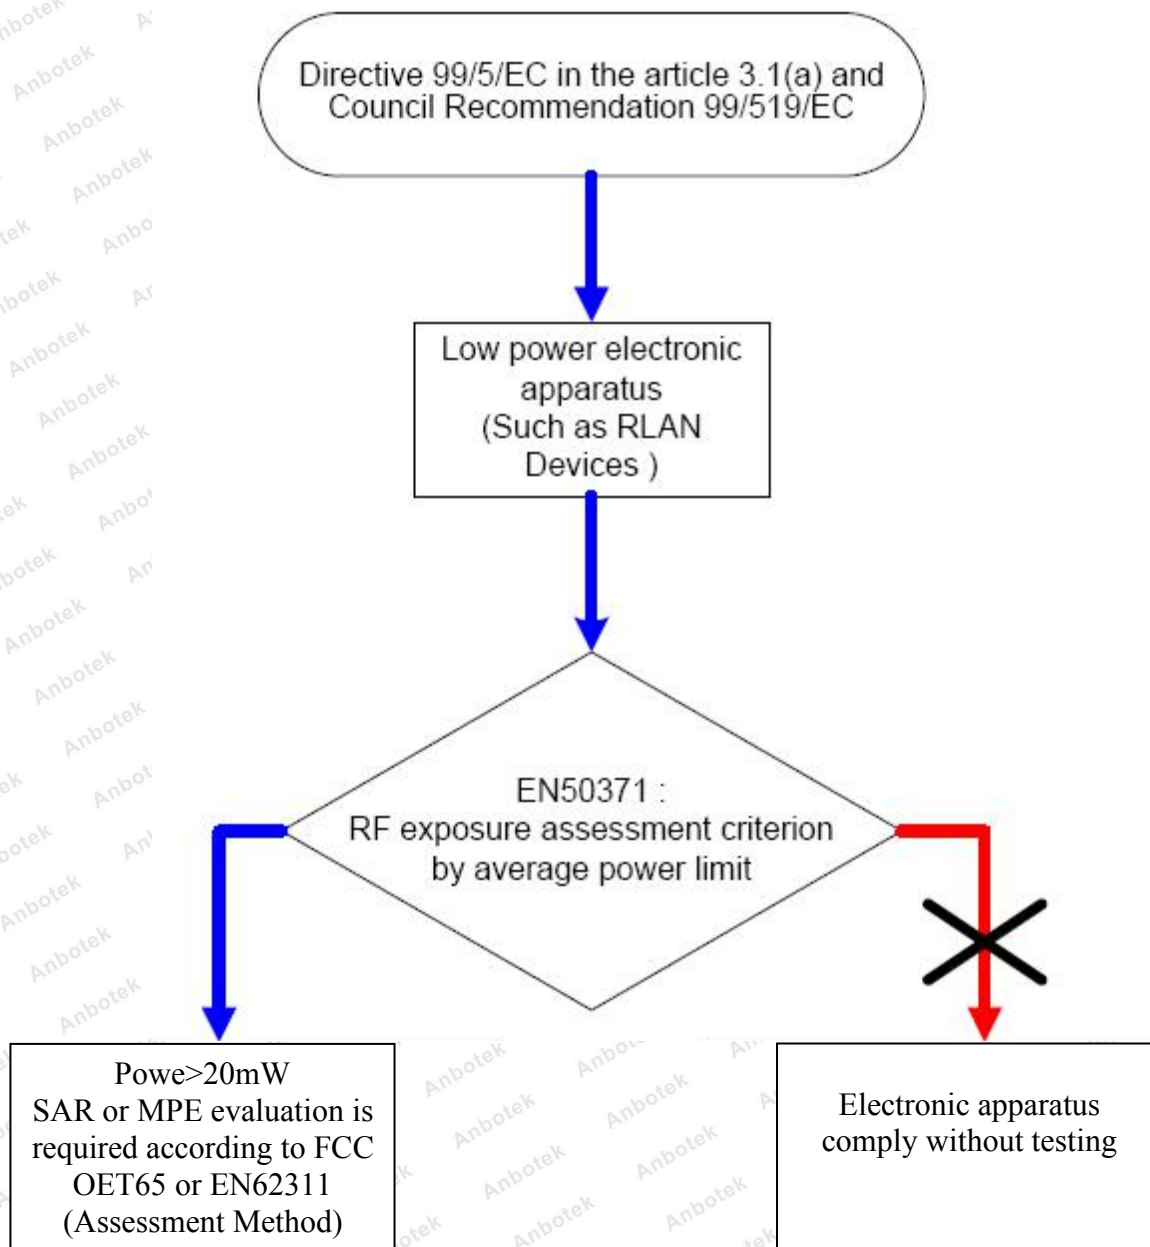

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-01-25. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.



3.2 Detailed results

Pass.

----- End of Report -----