

## HEALTH TEST REPORT

For

Bamboo wireless charging powerbank

Test Model: UP-9121

Prepared for :  
Address :

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 11, 2019  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : January 11, 2019 ~ January 14, 2019  
Date of Report : January 17, 2019



**HEALTHTEST REPORT****EN 62311: 2008**

Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)

Report Reference No. .... : LCS190109030AEC

Date of Issue ..... : January 17, 2019

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/Procedure..... : Full application of Harmonised standards ☒  
Partial application of Harmonised standards ☐  
Other standard testing method ☐

Applicant's Name ..... :

Address ..... :

**Test Specification**

Standard ..... : EN62311: 2008

Test Report Form No. .... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Bamboo wireless charging powerbank

Trade Mark ..... : N/A

Test Model..... : UP-9121

 Ratings ..... : Input: 5V ---, 2A  
 Wireless Output: 5W max.  
 USB Output: 5V ---, 2.1A,  
 Type-c Output: 5V ---, 2.4A  
 Battery : 3.7V ---, 5000mAh

Result..... : Positive

Compiled by:

Peter Xiao

Peter Xiao / Administrators

Supervised by:

Calvin Weng

Calvin Weng / Technique principal

Approved by:



Gavin Liang / Manager

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd..

## HEALTH--TEST REPORT

**Test Report No. : LCS190109030AEC**January 17, 2019  
Date of issue

Test Model..... : UP-9121

EUT..... : Bamboo wireless charging powerbank

**Applicant..... :**

Address..... :

Telephone..... : /

Fax..... : /

**Manufacturer..... :**

Address..... :

Telephone..... : /

Fax..... : /

**Factory..... :**

Address..... :

Telephone..... : /

Fax..... : /

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Report Version	Issue Date	Revisions	Revised By
000	January 17, 2019	Initial Issue	Gavin Liang

## 1. GENERAL INFORMATION

### 1.1. Product Description for Equipment Under Test (EUT)

EUT : Bamboo wireless charging powerbank  
Test Model : UP-9121  
Hardware Version : V1.2  
Software Version : V1.0  
Operating Frequency : 110.0~205.0KHz  
Modulation Type : Continuous Wave  
Antenna Type : Coil Antenna  
Ratings : Input: 5V ---,2A  
Wireless Output: 5W max.  
USB Output: 5V ---,2.1A,  
Type-c Output:5V ---,2.4A  
Battery : 3.7V ---, 5000mAh

### 1.2. Objective

According to its specifications, the EUT must comply with the requirements of the following standards:

EN 62311: 2008–Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)

### 1.3. Test Methodology

All measurements contained in this report were conducted with EN 62311: 2008.

### 1.4. Description of Test Facility

FCC Registration Number. is 254912.  
Industry Canada Registration Number. is 9642A-1.  
ESMD Registration Number. is ARCB0108.  
UL Registration Number. is 100571-492.  
TUV SUD Registration Number. is SCN1081.  
TUV RH Registration Number. is UA 50296516-001  
NVLAP Registration Code is 600167-0

### 1.5. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
iPhone	Mobile Phone	iPhone X	--	CE

## 1.6. External I/O

I/O Port Description	Quantity	Cable
USB Port	1	N/A
Micro USB Port	1	N/A
Type-C USB Port	1	N/A

## 1.7. Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 1.8. Measurement Uncertainty (95% confidence levels, k=2)

Test Item		Uncertainty
Radio Frequency	:	$0.9 \times 10^{-4}$
Total RF Power, Conducted	:	1.0 dB
RF Power Density, Conducted	:	1.8 dB
Spurious Emissions, Conducted	:	1.8 dB
All Emissions, Radiated	:	3.1 dB
Temperature	:	0.5 °C
Humidity	:	1 %
DC And Low Frequency Voltages	:	1 %

## 2.HUMAN EXPOSURE TO THE ELECTROMAGNETIC FIELDS

### 2.1 Basic Restrictions Reference levels

Council Recommendation 1999/519/EC Annex III

Basic restrictions for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

Frequency range	Magnetic flux density (mT)	Current density (Ma/m2) (rms)	Whole body average SAR (W/kg)	Localised SAR (head and trunk) (W/kg)	Localised SAR (limbs) (W/kg)	Power density (W/m2 )
0Hz	40	-	-	-	-	-
>0-1Hz	-	8	-	-	-	-
1-4Hz	-	8/f	-	-	-	-
4-1000Hz	-	2	-	-	-	-
1000Hz-100kHz	-	f/500	-	-	-	-
100kHz-10MHz	-	f/500	0.08	2	4	-
10MHz-10GHz	-	-	0.08	2	4	-
10-300GHz	-	-	-	-	-	10

Note:

1. f is the frequency in Hz.
2. The basic restriction on the current density is intended to protect against acute exposure effects on central nervous system tissues in the head and trunk of the body and includes a safety factor. The basic restrictions for ELF fields are based on established adverse effects on the central nervous system. Such acute effects are essentially instantaneous and there is no scientific justification to modify the basic restrictions for exposure of short duration. However, since the basic restriction refers to adverse effects on the central nervous system, this basic restriction may permit higher current densities in body tissues other than the central nervous system under the same exposure conditions.
3. Because of electrical inhomogeneity of the body, current densities should be averaged over a cross section of 1cm<sup>2</sup> perpendicular to the current direction.
4. For frequencies up to 100 kHz, peak current density values can be obtained by multiplying the rms value by  $\sqrt{2}$ (=1.414). For pulses of duration tp the equivalent frequency to apply in the basic restrictions should be calculated as  $f=1/(2tp)$
5. For frequencies up to 100kHz and for pulsed magnetic fields, the maximum current density associated with the pulses can be calculated from the rise/fall times and the maximum rate of change of magnetic flux density. The induced current density can then be compared with the appropriate basic restriction.
6. All SAR values are to be averaged over any six-minute period.
7. Localised SAR averaging mass is any 10g of contiguous tissue; the maximum SAR so obtained should be the value used for the estimation of exposure. These 10g of tissue are intended to be a mass of contiguous tissue with nearly homogeneous electrical properties. In specifying a contiguous mass of tissue, it is recognised that this concept can be used in computational dosimetry but may present difficulties for direct physical measurements. A simple geometry such as cubic tissue mass can be used provided that the calculated dosimetric quantities have conservation values relative to the exposure guidelines.

8. For pulses of duration  $t_p$  the equivalent frequency to apply in the basic restrictions should be calculated as  $f = 1/(2t_p)$ . Additionally, for pulsed exposures, in the frequency range 0,3 to 10GHz and for localised exposure of the head, in order to limit and avoid auditory effects caused by thermoelastic expansion, an additional basic restriction is recommended. This is that SA should not exceed 2mJ kg<sup>-1</sup> averaged over 10g of tissue.

## 2.2 Reference Levels

Council Recommendation 1999/519/EC Annex III

Reference levels for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density Seq (W/m <sup>2</sup> )
0-1Hz	-	$3,2 \times 10^4$	$4 \times 10^4$	-
1-8Hz	1000	$3,2 \times 10^4 / f^2$	$4 \times 10^4 / f^2$	-
8-25Hz	1000	4000/f	5000/f	-
0.025Hz-0,8kHz	250/f	4/f	5/f6,25	-
0,8-3kHz	250/f	5	6,25	-
3-150kHz	87	5	6,25	-
0,15-1MHz	87	0.73/f	0,92/f	-
1-10MHz	$87/f^{1/2}$	0.73/f	0,92/f	-
10-400MHz	28	0.073	0,092	2
400-2000MHz	$1,375 f^{1/2}$	$0,0037 f^{1/2}$	$0,0046 f^{1/2}$	f/200
2-300GHz	61	0,16	0,20	10

Note:

1. As indicated in the frequency range column.
2. For frequencies between 100kHz and 10GHz, Seq, E2, H2 and B2 are to be averaged over any six-minute period.
3. For frequencies exceeding 10GHz, Seq, E2, H2 and B2 are to be averaged over any 68/.1.05-minute period (.in GHz).
4. No E-field value is provided for frequencies <1Hz, which are effectively static electric fields. For most people the annoying perception of surface electric charges will not occur at field strengths less than 20kV/m. Spark discharges causing stress or annoyance should be avoided.




### 3. RF EXPOSURE EVALUATION

#### 3.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
1	Exposure Level Tester	Narda	ELT-400	N-0713	2018-04-02	2019-04-01
2	B-Field Probe	Narda	ELT-400	M-1154	2018-04-10	2019-04-09

#### 3.2. Block Diagram of Test Setup

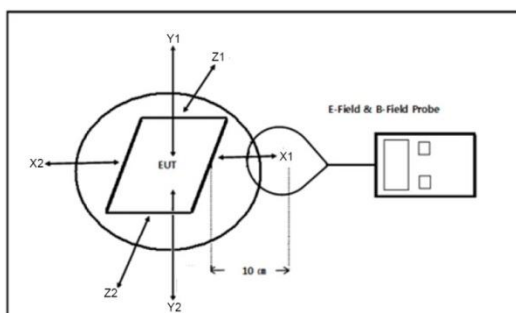

\*Note:

Position A: Back Side of the EUT

Position B: Left Side of the EUT

Position C: Front Side of the EUT

Position D: Right Side of the EUT

Position E: Top Side of the EUT

Position F: Bottom Side of the EUT

#### 3.3. Test Results

##### H-field Strength Test Result:

Test condition: Wireless Charging mode

Frequency Range (KHz)	Probe Position Hx1 (A/m)	Probe Position Hx2 (A/m)	Probe Position Hy (A/m)	Probe Position Hz1 (A/m)	Probe Position Hz2 (A/m)	Result H (A/m)	Limit (A/m)
165.0	0.06	0.07	0.05	0.07	0.05	0.3146	4.242

$$H = \sqrt{H_x^2 + H_y^2 + H_z^2} = \sqrt{0.07^2 + 0.05^2 + 0.05^2} \text{ A/m} = 0.3146 \text{ A/m}$$

$$\text{Limit} = 0.73 / 0.165 \text{ A/m} = 4.242 \text{ A/m}$$

Note: All test modes have been tested and only record the worst result.

-----THE END OF REPORT-----