



Report No.: SZAWW190506002-01E

Page 1 of 38

RED-EMC Test Report

Client Name :

Address :

Product Name : Wireless Power Bank 5000mAh

Date : May 24, 2019

Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Code: AB-RF-04-a

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com



Hotline
400-003-0500
www.anbotech.com

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Test Equipment List.....	6
1.6. Description of Test Facility.....	7
1.7. Performance Criteria.....	8
2. Summary of Test Results.....	11
3. Emission Test.....	12
3.1. Conducted Emission Test at Main Ports.....	12
3.1.1. Test Standard and Limit.....	12
3.1.2. Test Setup.....	12
3.1.3. Test Procedure.....	13
3.1.4. Test Data.....	13
3.2. Radiated Emission Test.....	18
3.2.1. Test Standard and Limit.....	18
3.2.2. Test Setup.....	19
3.2.3. Test Procedure.....	20
3.2.4. Test Data.....	20
4. Immunity Test.....	25
4.1. Electrostatic Discharge Test.....	26
4.1.1. Test Standard and Specification.....	26
4.1.2. Test Setup.....	26
4.1.3. Test Procedure.....	27
4.1.4. Test Data.....	27
4.2. Radiated, RF Electromagnetic Fields Test.....	29
4.2.1. Test Standard and Specification.....	29
4.2.2. Test Setup.....	29
4.2.3. Test Procedure.....	29
4.2.4. Test Data.....	30
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	31
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	33
APPENDIX III -- INTERNAL PHOTOGRAPH.....	36

TEST REPORT

Applicant :
Manufacturer :
Product Name : Wireless Power Bank 5000mAh
Model No. : SW50, P324.58
Trade Mark :
Type-c Input: DC 5V, 2A
Rating(s) : Micro Input: DC 5V, 2A(with DC 3.7V, 5000 mAh Battery inside)
USB Output: 5V/2A; Wireless Output: 5V/1A

Test Standard(s) : ETSI EN 301 489-1 V2.1.1 (2017-02)
EN 55032: 2015; EN 55035: 2017
ETSI EN 301 489-3 V2.1.1 (2017-03)

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 301 489-1, EN 301 489-3 and EN 55032, EN 55035 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

May 06, 2019

Date of Test

May 06~11, 2019

Prepared By



(Engineer / Oliay Yang)

Reviewer

(Supervisor / Snowy Meng)

Approved & Authorized Signer

(Manager / Sally Zhang)

Shenzhen Anbotech Compliance Laboratory Limited

Code: AB-RF-04-a

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

1. General Information

1.1. Client Information

Applicant	:	
Address	:	
Manufacturer	:	
Address	:	
Factory	:	
Address	:	

1.2. Description of Device (EUT)

Product Name	:	Wireless Power Bank 5000mAh	
Model No.	:	SW50, P324.58 (Note: All samples are the same except the model name, so we prepare "SW50" for test only.)	
Trade Mark	:		
Test Power Supply	:	AC 230V, 50Hz for adapter/ AC 110V, 50Hz for adapter/ DC 3.7V by battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	110~205KHz
		Modulation Type:	MSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Samsung M/N: ETA-U90CBC S/N: RT6FB17ZS/B-E Input: 100-240V~ 50-60Hz, 0.35A Output: DC 5V, 2A
Mobile Phone	:	iPhone 8

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charge (Type-c Input) & Wireless & Full Load Mode
Mode 2	Charge (Micro Input) & Wireless & Full Load Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charge (Type-c Input) & Wireless & Full Load Mode
Mode 2	Charge (Micro Input) & Wireless & Full Load Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charge (Type-c Input) & Wireless & Full Load Mode
Mode 2	Charge (Micro Input) & Wireless & Full Load Mode

1.5. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 26, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A
5.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
6.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3Ctest	ESD-30T	ES0131505	Nov. 26, 2018	1 Year

R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
2	Amplifier	Micotoop	MPA-80-1000-250	MPA1903096	N/A	N/A
3	Amplifier	Micotoop	MPA-1000-6000-100	MPA1903122	N/A	N/A
4	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	Aug. 17, 2018	3 Year
5	Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	3 Year
6	Power Sensor	Agilent	E9301A	MY41498906	Nov. 05, 2018	1 Year
7	Power Sensor	Agilent	E9301A	MY41498088	Nov. 05, 2018	1 Year
8	Power Meter	Agilent	E4419B	GB40202909	Nov. 05, 2018	1 Year
9	Field Probe	ETS-Lindgren	HI-6006	00212747	Apr. 20, 2017	3 Year
10	software	EMtrace	EM 3	N/A	N/A	N/A

1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

1.7. Performance Criteria

1.7.1. For EMS Test:

- √ A: Normal performance within the specification limits;
- √ B: Temporary degradation or loss of function or performance which is self-recoverable;
- √ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset;
- √ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.

1.7.2. For EN 301 489-1:

The performance criteria are used to take a decision on whether a radio equipment passes or fails immunity tests.

For the purpose of the present document four categories of performance criteria apply:

- Performance criteria for continuous phenomena applied to transmitters and receivers
- Performance criteria for transient phenomena applied to transmitters and receivers
- Performance criteria for equipment which does not provide a continuous communication link
- Performance criteria for ancillary equipment tested on a stand alone basis

Normally, the performance criteria depend on the type of radio equipment. Thus, the present document only contains

general performance criteria commonly used for the assessment of radio equipment. More specific and product-related

performance criteria for a dedicated type of radio equipment may be found in the part of ETSI EN 301 489 series [i.13] dealing with the particular type of radio equipment and if present takes precedence over the requirements in clauses 1.7.2.1, 1.7.2.2, 1.7.2.3 and 1.7.2.4 of the present document.

1.7.2.1 Performance criteria for transient phenomena applied to transmitters and receivers

If no further details are given in the relevant part of ETSI EN 301 489 series [i.13] dealing with the particular type of radio equipment, the following general performance criteria for continuous phenomena shall apply. During and after the test, the equipment shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the equipment is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.

1.7.2.2 Performance criteria for transient phenomena applied to transmitters and receivers

If no further details are given in the relevant part of ETSI EN 301 489 series [i.13] dealing with the particular type of radio equipment, the following general performance criteria for transient phenomena shall apply. For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the

following criteria applies:

- For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A SW reboot is not allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
- For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. A SW reboot is not allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost. For all other ports the following applies:
 - After the test, the equipment shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the equipment is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.
 - During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed.
 - If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.

1.7.2.3 Performance criteria for equipment which does not provide a continuous communication link

For radio equipment which does not provide a continuous communication link, the performance criteria

described in clauses 1.7.2.1 and 1.7.2.2 are not appropriate, in these cases the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation. The related specifications set out in clause 5.3 have also to be taken into account. The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in clauses 1.7.2.1 and 1.7.2.2.

1.7.2.4 Performance criteria for ancillary equipment tested on a stand alone basis

If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in clauses 1.7.2.1 and 1.7.2.2 are not appropriate, in these cases the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation. The related specifications set out in clause 5.3 have also to be taken into account. The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in clauses 1.7.2.1 and 1.7.2.2.

1.7.3. For EN 301 489-3:

- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.

NOTE: Whether a phenomenon is considered transient, continuous or otherwise is indicated in the test procedures for the phenomenon in ETSI EN 301 489-1 [1], clause 9.

Table 2: Performance Requirements

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

Where "operate as intended" or "no loss of function" is specified, the EUT shall demonstrate correct functioning as described in clause 5. Where the EUT has more than one mode of operation (see clause 4.5.2), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in sufficient modes to confirm there are no such unintentional responses.

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

2. Summary of Test Results

EMC Emission				
Test Items	Standard	Basic Standard	Limit	Results
Conducted Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.3 & 8.4	EN 55032: 2015	Class A or B NOTE (2)	PASS
Radiated Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.2	EN 55032: 2015	Class A or B NOTE (2)	PASS
Harmonic Current Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.5	EN 61000-3-2: 2014	Class A	N/A
Voltage Fluctuations& Flicker	ETSI EN 301 489-1 V2.1.1 Clause 8.6	EN 61000-3-3: 2013	/	N/A
EMC Immunity				
Test Items	Standard	Basic Standard	Performance Criteria	Results
Electrostatic Discharge	ETSI EN 301 489-1 V2.1.1 Clause 9.3	EN 61000-4-2: 2009	B	PASS
RF Electromagnetic Field	ETSI EN 301 489-1 V2.1.1 Clause 9.2	EN 61000-4-3: 2006 +A1: 2008+A2: 2010	A	PASS
Fast transients, common mode	ETSI EN 301 489-1 V2.1.1 Clause 9.4	EN 61000-4-4: 2012	B	N/A
Surges	ETSI EN 301 489-1 V2.1.1 Clause 9.8	EN 61000-4-5: 2014+A1: 2017	B	N/A
Radio frequency, common mode	ETSI EN 301 489-1 V2.1.1 Clause 9.5	EN 61000-4-6: 2014	A	N/A
Volt. Interruptions Volt. Dips	ETSI EN 301 489-1 V2.1.1 Clause 9.7	EN 61000-4-11: 2004	B / C / C NOTE (3)	N/A
NOTE:				
	(1) " N/A" denotes test is not applicable in this Test Report			
	(2) Alternatively, for equipment intended to be used exclusively in an industrial environment or a telecommunication centre, the class A limits may be used.			
	(3) Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 70% reduction – Performance Criteria C			
	Voltage Interruption: 0% Interruption – Performance Criteria C			

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

3. Emission Test

3.1. Conducted Emission Test at Main Ports

3.1.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 8.3 & 8.4
Basic Standard	EN 55032: 2015

Limits for conducted emissions


Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: *Decreasing linearly with logarithm of the frequency.

Limits for conducted emissions of equipment
intended to be used in telecommunication centres and industrial environment

Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	79	66
	500kHz~30MHz	73	60

3.1.2. Test Setup

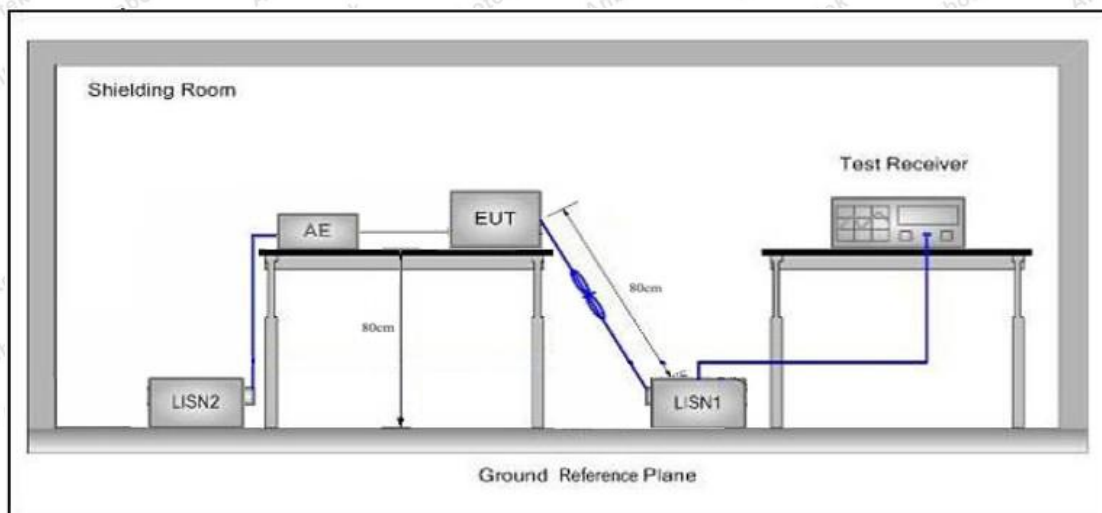

3.1.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ETSI EN 301 489-1 V2.1.1& EN 55032: 2015 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

For the actual test configuration, please refer to the related Item EUT Test Photos.

3.1.4. Test Data

PASS

The EUT should be compliance to the limit of Class B


Only the worst case data was showed in the report, please to see the following pages



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL DOCUMENT WAS ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 230V, 50Hz for adapter
Comment: Live Line
Tem.: 21.7°C Hum.: 54%

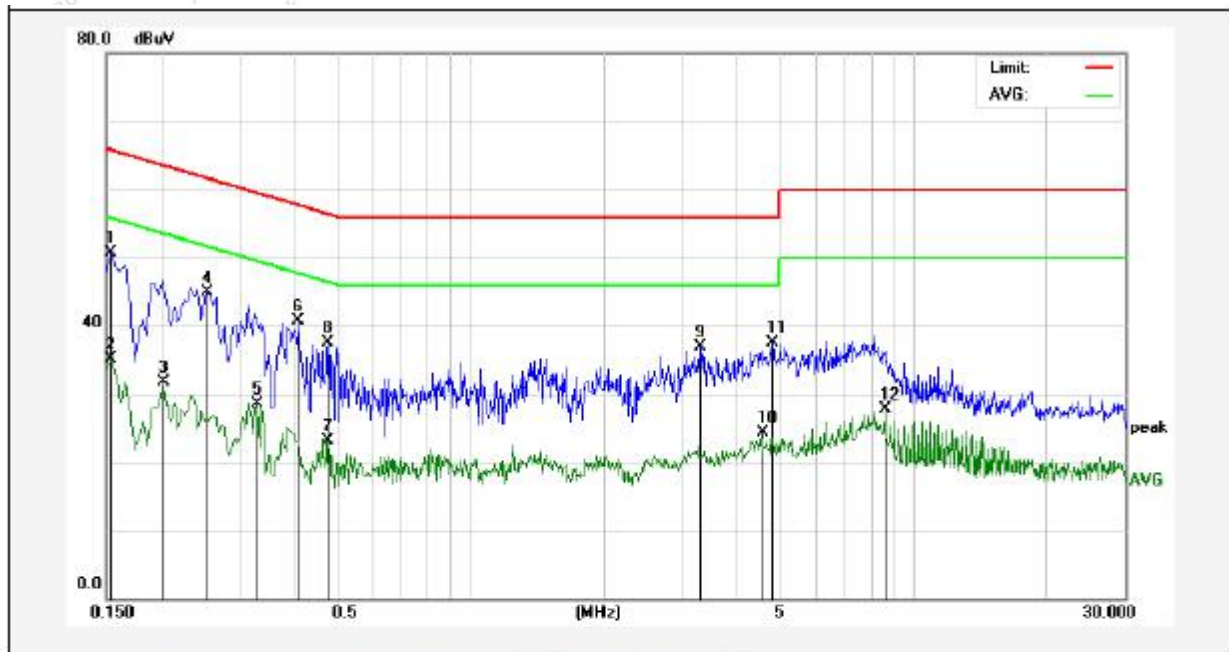


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	30.90	19.90	50.80	65.78	-14.98	QP	
2	0.1539	15.16	19.90	35.06	55.78	-20.72	AVG	
3	0.2020	11.77	19.90	31.67	53.52	-21.85	AVG	
4	0.2540	25.11	19.89	45.00	61.62	-16.62	QP	
5	0.3300	8.58	19.90	28.48	49.45	-20.97	AVG	
6	0.4100	20.78	19.94	40.72	57.65	-16.93	QP	
7	0.4740	3.10	19.97	23.07	46.44	-23.37	AVG	
8	0.4780	17.56	19.97	37.53	56.37	-18.84	QP	
9	3.2980	16.68	20.17	36.85	56.00	-19.15	QP	
10	4.5300	4.17	20.19	24.36	46.00	-21.64	AVG	
11	4.8180	17.28	20.20	37.48	56.00	-18.52	QP	
12	8.6059	7.46	20.30	27.76	50.00	-22.24	AVG	

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 230V, 50Hz for adapter
Comment: Neutral Line
Tem.: 21.7°C Hum.: 54%

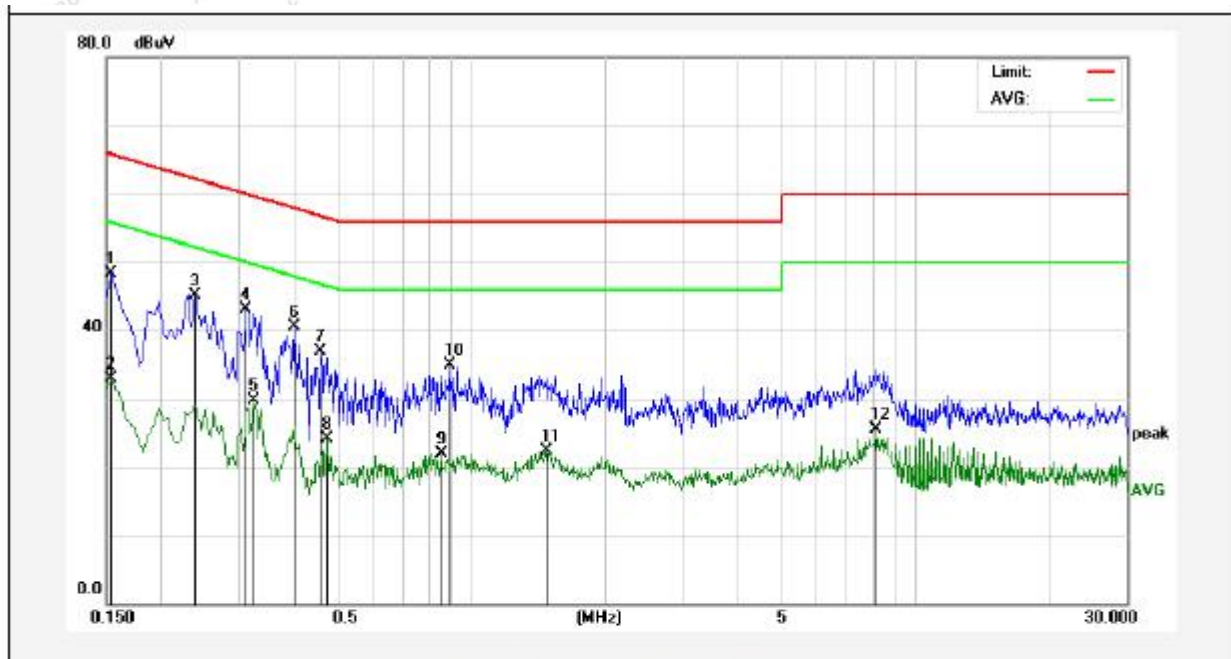


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	28.39	19.90	48.29	65.78	-17.49	QP	
2	0.1539	12.98	19.90	32.88	55.78	-22.90	AVG	
3	0.2380	25.13	19.89	45.02	62.16	-17.14	QP	
4	0.3100	23.14	19.89	43.03	59.97	-16.94	QP	
5	0.3220	9.83	19.90	29.73	49.65	-19.92	AVG	
6	0.3980	20.53	19.93	40.46	57.89	-17.43	QP	
7	0.4580	16.92	19.96	36.88	56.73	-19.85	QP	
8	0.4740	4.06	19.97	24.03	46.44	-22.41	AVG	
9	0.8540	1.92	20.08	22.00	46.00	-24.00	AVG	
10	0.8900	14.81	20.09	34.90	56.00	-21.10	QP	
11	1.4780	2.11	20.13	22.24	46.00	-23.76	AVG	
12	8.1620	5.17	20.29	25.46	50.00	-24.54	AVG	

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 110V, 50Hz for adapter
Comment: Live Line
Tem.: 21.7℃ Hum.: 54%

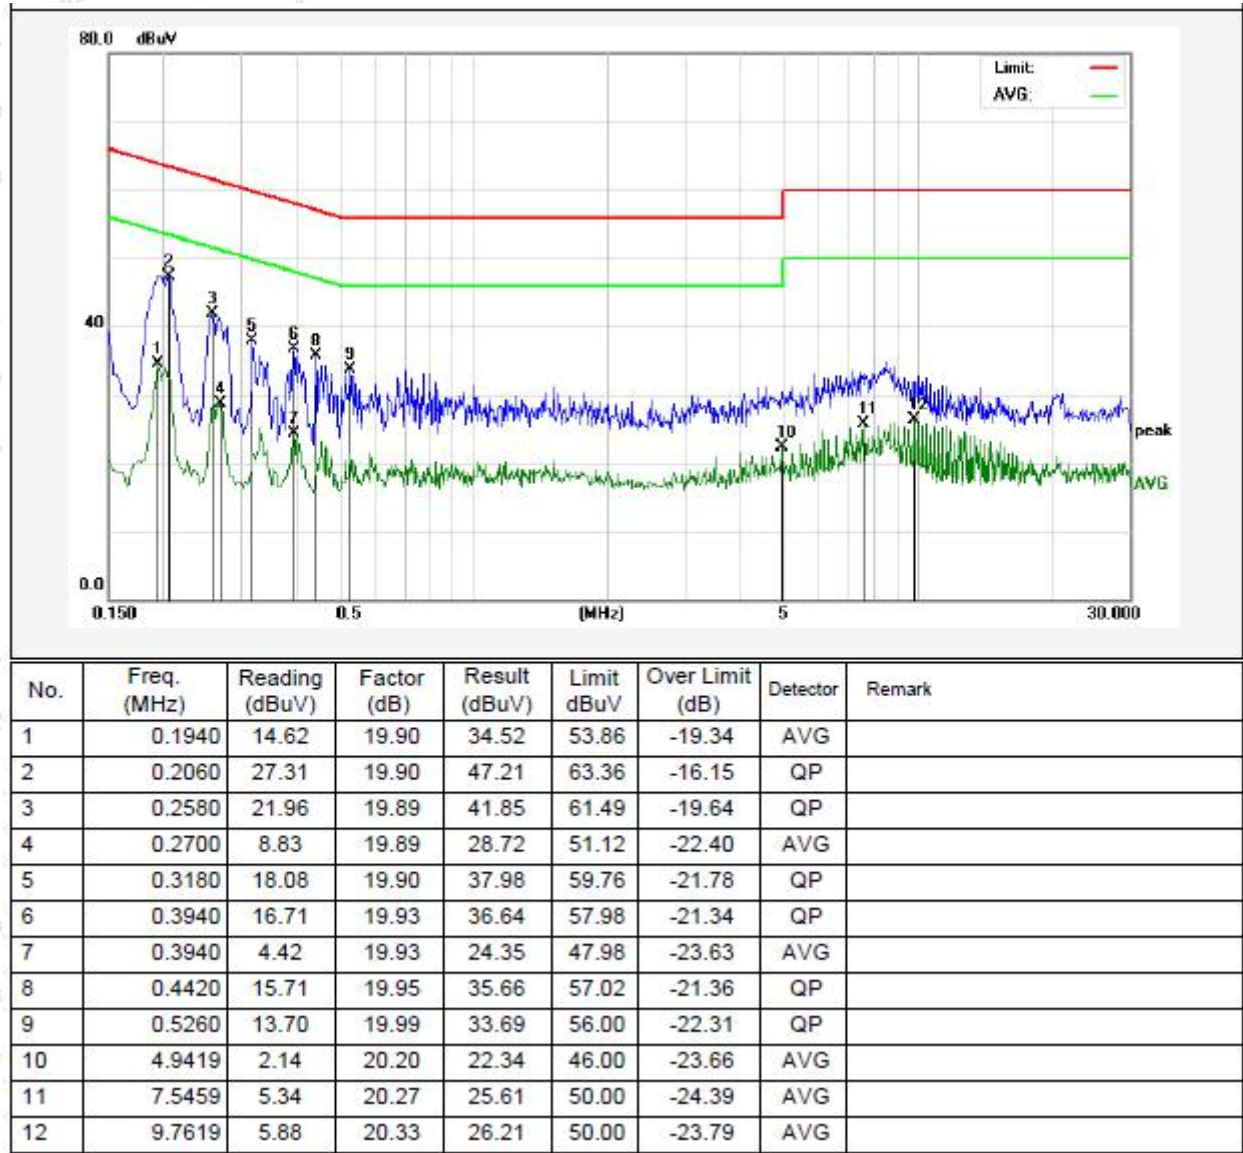

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 110V, 50Hz for adapter
Comment: Neutral Line
Tem.: 21.7℃ Hum.: 54%

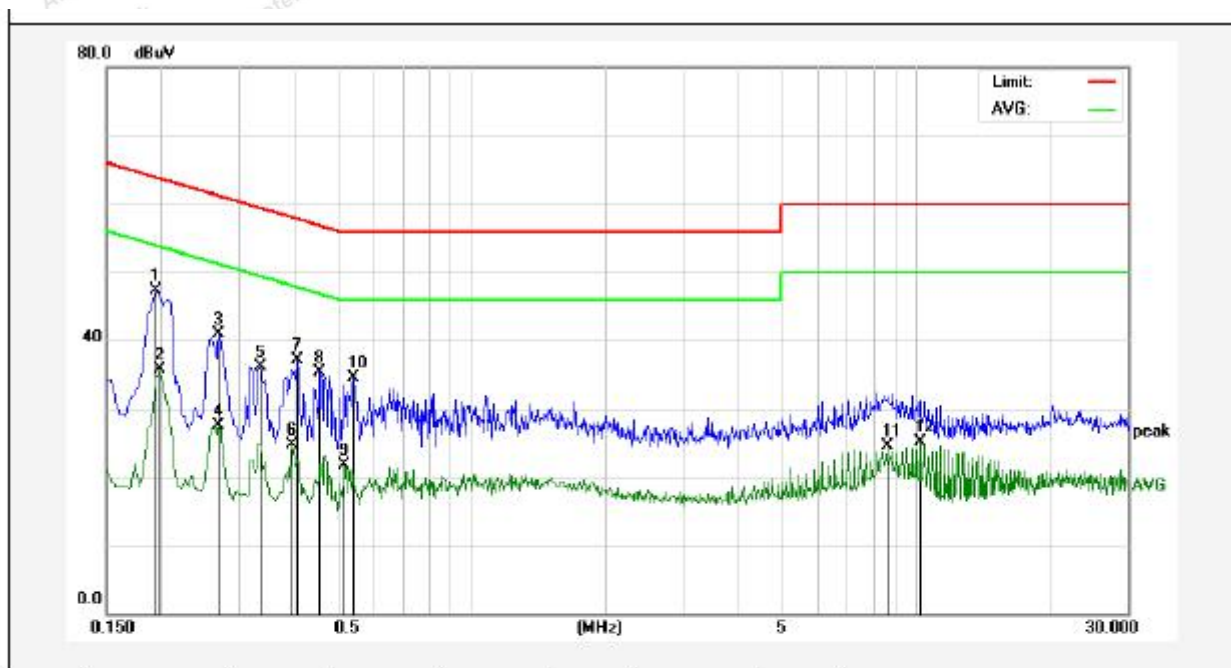

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1940	27.44	19.90	47.34	63.86	-16.52	QP	
2	0.1980	15.87	19.90	35.77	53.69	-17.92	AVG	
3	0.2700	20.97	19.89	40.86	61.12	-20.26	QP	
4	0.2700	7.65	19.89	27.54	51.12	-23.58	AVG	
5	0.3339	16.28	19.91	36.19	59.35	-23.16	QP	
6	0.3940	4.77	19.93	24.70	47.98	-23.28	AVG	
7	0.4060	17.11	19.94	37.05	57.73	-20.68	QP	
8	0.4540	15.41	19.96	35.37	56.80	-21.43	QP	
9	0.5180	1.66	19.99	21.65	46.00	-24.35	AVG	
10	0.5420	14.57	19.99	34.56	56.00	-21.44	QP	
11	8.6340	4.25	20.30	24.55	50.00	-25.45	AVG	
12	10.2260	4.75	20.34	25.09	50.00	-24.91	AVG	

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

3.2. Radiated Emission Test

3.2.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 8.2
Basic Standard	EN 55032: 2015

Radiated Emission Test Limit (Below 1000MHz)

Frequency (MHz)	Limit (dB μ V/m)	
	Quasi-peak Level	
	Class B	Class A
30MHz~230MHz	40	50
230MHz~1000MHz	47	57

Remark: 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.

Radiated Emission Test Limit (Above 1000MHz)

Frequency (MHz)	Limit (dB μ V/m)			
	Class B		Class A	
	Peak	Average	Peak	Average
1000 MHz -3000 MHz	70	50	76	56
3000 MHz -6000 MHz	74	54	80	60

Remark: 1. The lower limit applies at the transition frequency. 2. The test distance is 3m.

Radiated Emission Test Limit for FM Receivers

Frequency (MHz)	Limit (dB μ V/m)	
	Quasi-peak Level	
	Fundamental	Harmonics
30MHz~230MHz	60	52
230MHz~300MHz	60	52
300MHz~1000MHz	60	56

Remark: 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.

Frequency Range of Radiated Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 6 GHz, whichever is lower

3.2.2. Test Setup

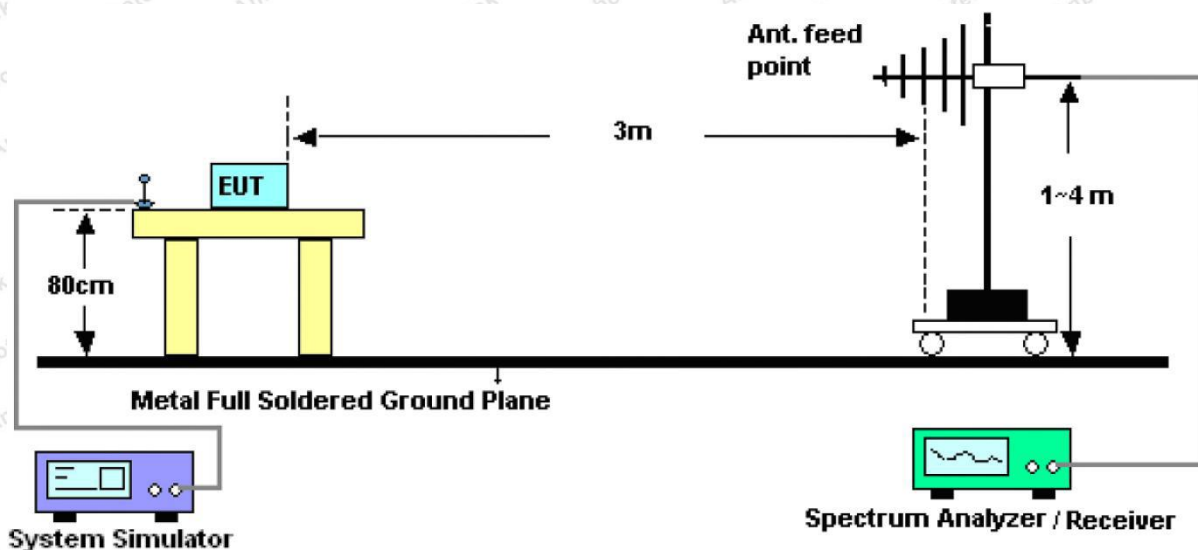


Figure 1. 30MHz to 1GHz

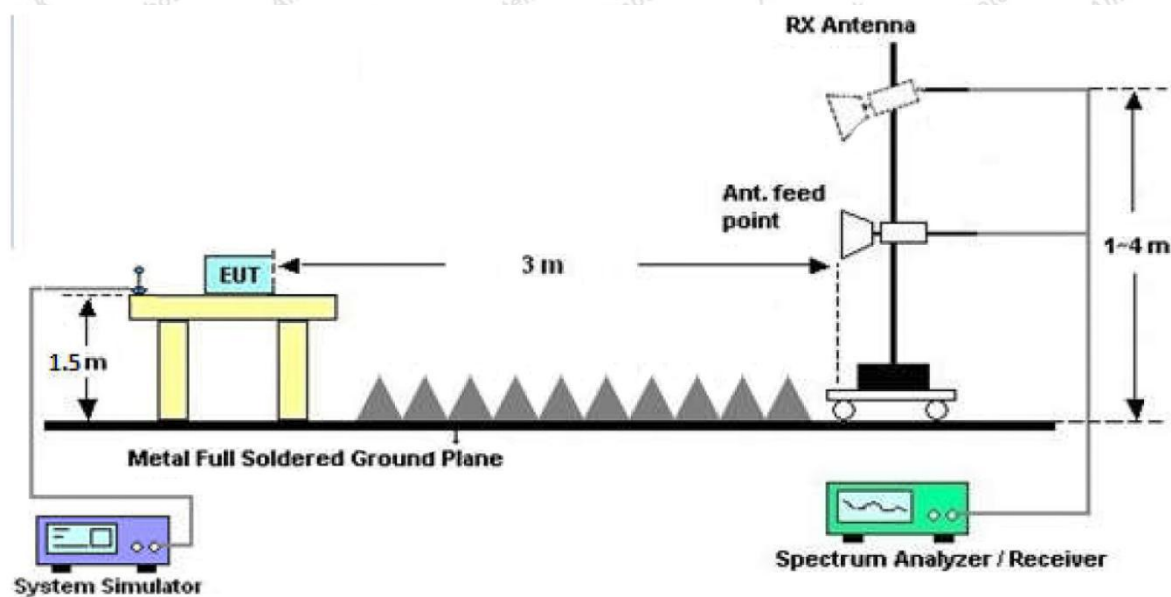


Figure 2. Above 1 GHz

3.2.3. Test Procedure

- 1) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- 2) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 3) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- 6) For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak/ Average detection at frequency above 1GHz.

3.2.4. Test Data

PASS

The EUT should be compliance to the limit of Class B

Only the worst case data was showed in the report, please to see the following pages




Report No.: SZAWW190506002-01E

Page 21 of 38

Test Results (30~1000MHz)

Job No.: SZAWW190506002-01E Temp.(°C)/Hum.(%RH): 23.7°C/51%RH
Standard: EN301489_Class B_3m Power Source: AC 230V, 50Hz for adapter
Test Mode: Mode 2 Polarization: Vertical

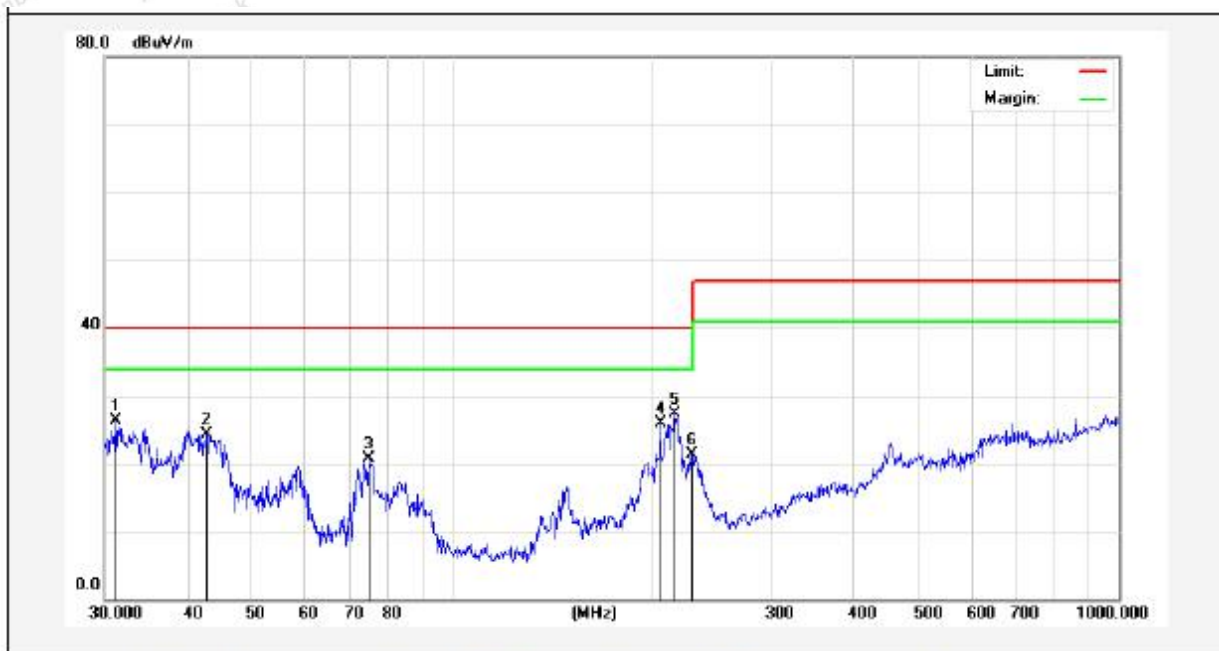

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.1798	44.34	-17.94	26.40	40.00	-13.60	peak			
2	42.6000	40.84	-16.55	24.29	40.00	-15.71	peak			
3	74.6569	42.94	-22.28	20.66	40.00	-19.34	peak			
4	204.9551	42.49	-16.54	25.95	40.00	-14.05	peak			
5	215.2678	43.37	-16.15	27.22	40.00	-12.78	peak			
6	228.4904	36.80	-15.54	21.26	40.00	-18.74	peak			

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Report No.: SZAWW190506002-01E

Page 22 of 38

Test Results (30~1000MHz)

Job No.:	SZAWW190506002-01E	Temp.(°C)/Hum.(%RH):	23.7°C/51%RH
Standard:	EN301489_Class B_3m	Power Source:	AC 230V, 50Hz for adapter
Test Mode:	Mode 2	Polarization:	Horizontal




No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	172.5988	49.80	-21.57	28.23	40.00	-11.77	peak			
2	195.1365	55.81	-21.26	34.55	40.00	-5.45	QP	300	0	
3	214.9278	57.89	-20.92	36.97	40.00	-3.03	QP	300	360	
4	229.2931	55.15	-20.03	35.12	40.00	-4.88	QP	300	360	
5	239.9874	52.13	-18.95	33.18	47.00	-13.82	peak			
6	454.3100	44.47	-13.49	30.98	47.00	-16.02	peak			

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test Results (30~1000MHz)

Job No.:	SZAWW190506002-01E	Temp.(°C)/Hum.(%RH):	23.7°C/51%RH
Standard:	EN301489_Class B_3m	Power Source:	AC 110V, 50Hz for adapter
Test Mode:	Mode 2	Polarization:	Vertical

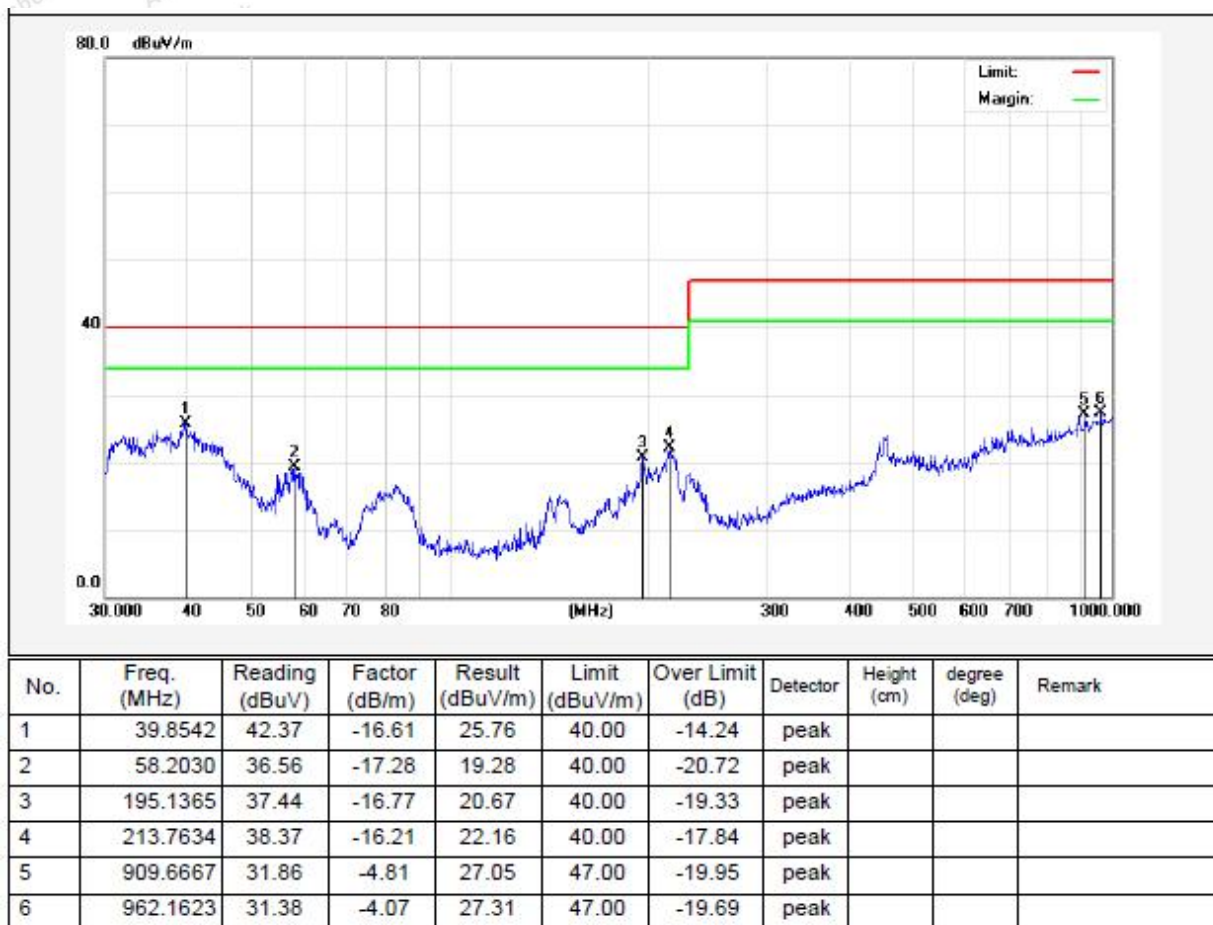

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test Results (30~1000MHz)

Job No.:	SZAWW190506002-01E	Temp.(°C)/Hum.(%RH):	23.7°C/51%RH
Standard:	EN301489_Class B_3m	Power Source:	AC 110V, 50Hz for adapter
Test Mode:	Mode 2	Polarization:	Horizontal



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	172.5988	46.00	-21.57	24.43	40.00	-15.57	peak			
2	195.8220	53.11	-21.18	31.93	40.00	-8.07	peak			
3	213.7634	54.10	-20.89	33.21	40.00	-6.79	peak			
4	228.4904	49.66	-20.12	29.54	40.00	-10.46	peak			
5	455.9058	44.25	-13.48	30.77	47.00	-16.23	peak			
6	972.3374	32.17	-4.92	27.25	47.00	-19.75	peak			



4. Immunity Test

General Performance Criteria

◆ Performance criteria for continuous phenomena applied to transmitters and receivers (CT/CR)

During and after the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for transient phenomena applied to transmitters and receivers (TT/TR)

After the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for equipment which does not provide a continuous communication link

For radio equipment which does not provide a continuous communication link, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.

The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

◆ Performance criteria for ancillary equipment tested on a stand alone basis

If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.


The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

4.1. Electrostatic Discharge Test

4.1.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 9.3/ EN 55035 Clause 4.2.1
Basic Standard	EN 61000-4-2: 2009
Discharge Impedance:	330 ohm / 150 pF
Performance Criterion:	CT/CR
Discharge Voltage:	Air Discharge: 2kV/4kV/8kV Contact Discharge: 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.1.2. Test Setup

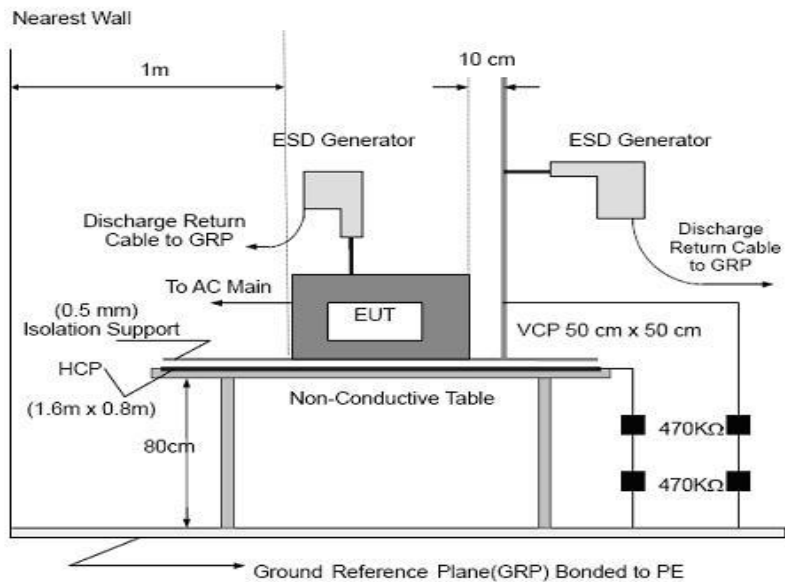

Note:

TABLE-TOP EQUIPMENT:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940kohm total impedance. The equipment under test, was

installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT:

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.1.3. Test Procedure

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- 1) Contact discharge was applied to conductive surfaces and coupling planes of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- 2) Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

- 3) For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4. Test Data

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Job No.: SZAWW190506002-01E Temp.(°C)/Hum.(%RH): 23.6°C/54%RH
Standard: EN 61000-4-2 Power Source: AC 230V, 50Hz for adapter/
DC 3.7V by battery inside
Test Mode: All Mode

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+6kV	-	-	n.r.r. PASS
-6kV	-	-	n.r.r. PASS
+8kV	-	-	n.r.r. PASS
-8kV	-	-	n.r.r. PASS

Remarks: n.r.r. = no reaction recognized


Performance Criteria A observed and No any function degraded during the tests.

4.2. Radiated, RF Electromagnetic Fields Test

4.2.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 9.2/ EN 55035 Clause 5
Basic Standard	EN 61000-4-3: 2006+A1: 2008+A2: 2010
Required Performance	A
Frequency Range	80MHz to 6GHz
Field Strength	3 V/m
Modulation	1kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of preceding frequency value
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.5 m
Dwell Time	at least 0.5 seconds

4.2.2. Test Setup

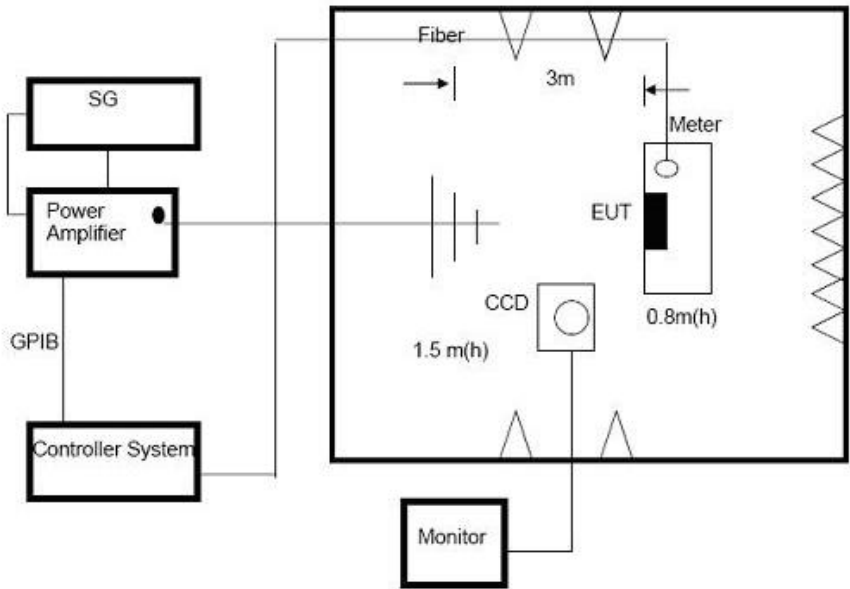

4.2.3. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Report No.: SZAWW190506002-01E
meters.

Page 30 of 38

- 1) The field strength level was 3V/m
- 2) The frequency range is swept from 80 MHz to 6000 MHz with the signal 80%amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.2.4. Test Data

Job No.: SZAWW190506002-01E Temp.(°C)/Hum.(%RH): 23.6°C/54%RH
Standard: EN 61000-4-3 Power Source: AC 230V, 50Hz for adapter/
DC 3.7V by battery inside
Test Mode: All Mode

Frequency Range (MHz)	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	<div><input checked="" type="checkbox"/> A <input type="checkbox"/> B</div> <div><input type="checkbox"/> C <input type="checkbox"/> D</div>
			Rear	
			Left	
			Right	

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test

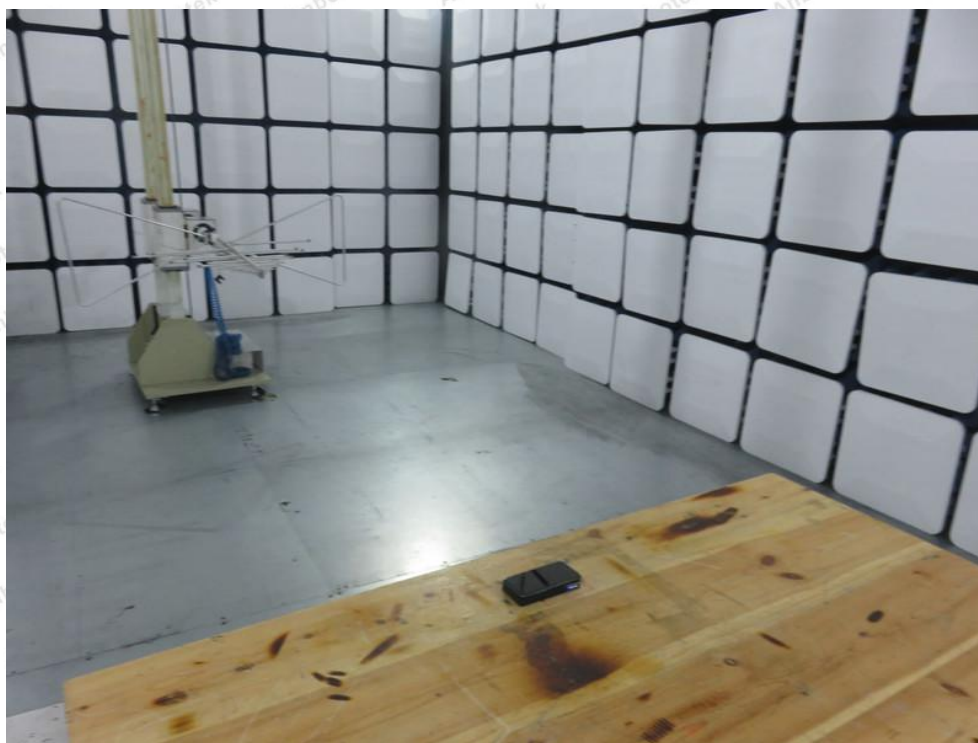
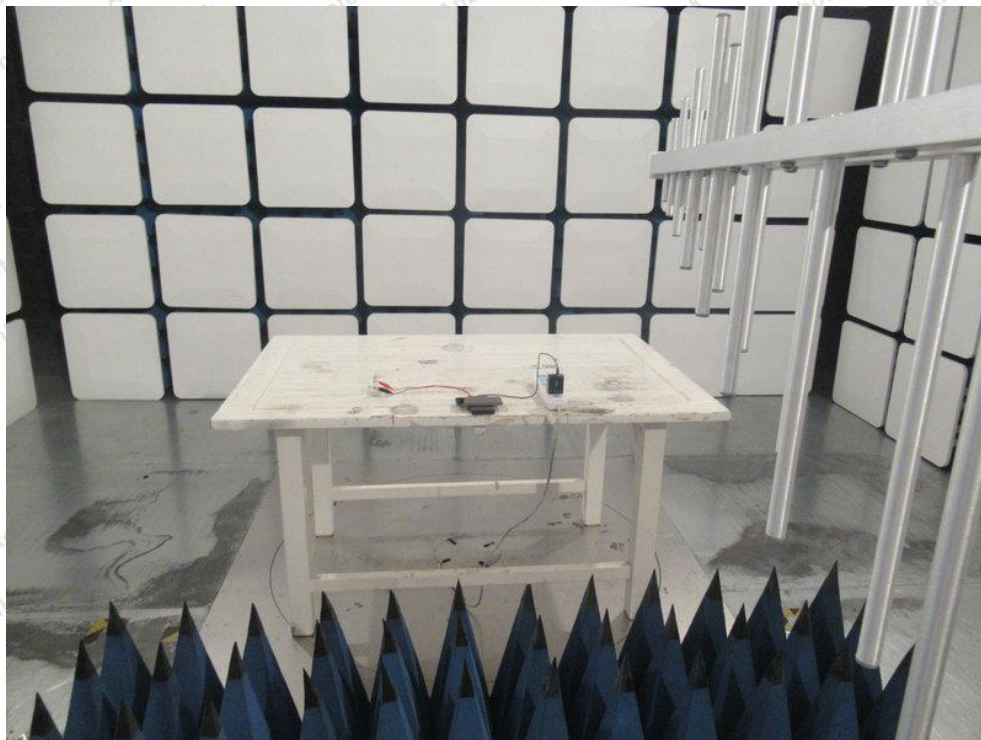




Photo of Electrostatic Discharge Test

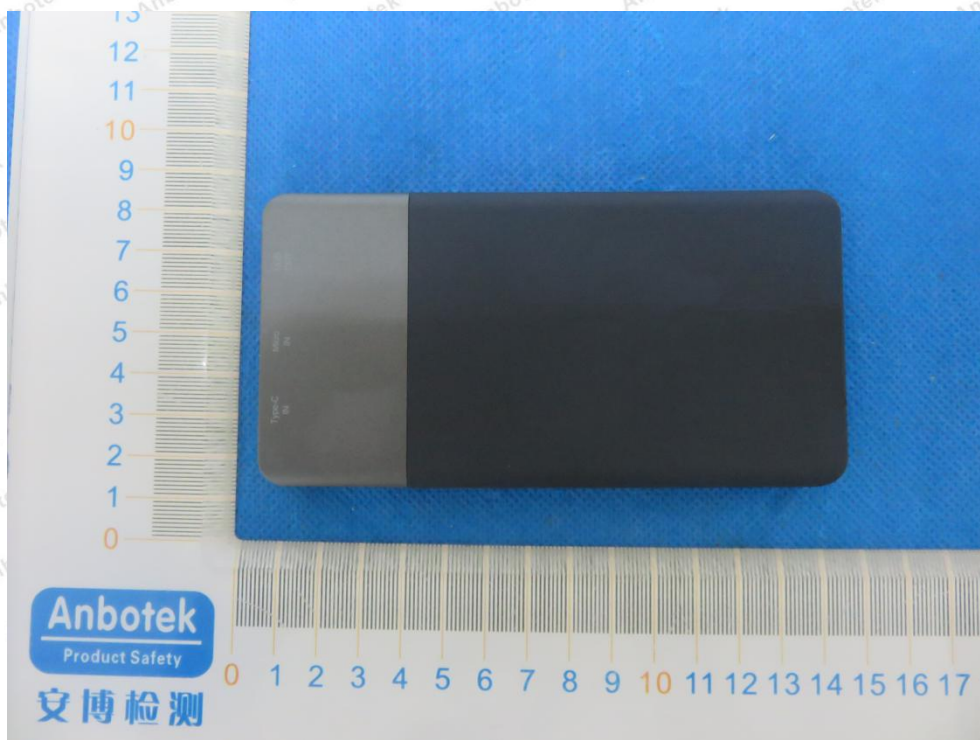


Photo of RF Field Strength Susceptibility Test




THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

APPENDIX II -- EXTERNAL PHOTOGRAPH



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

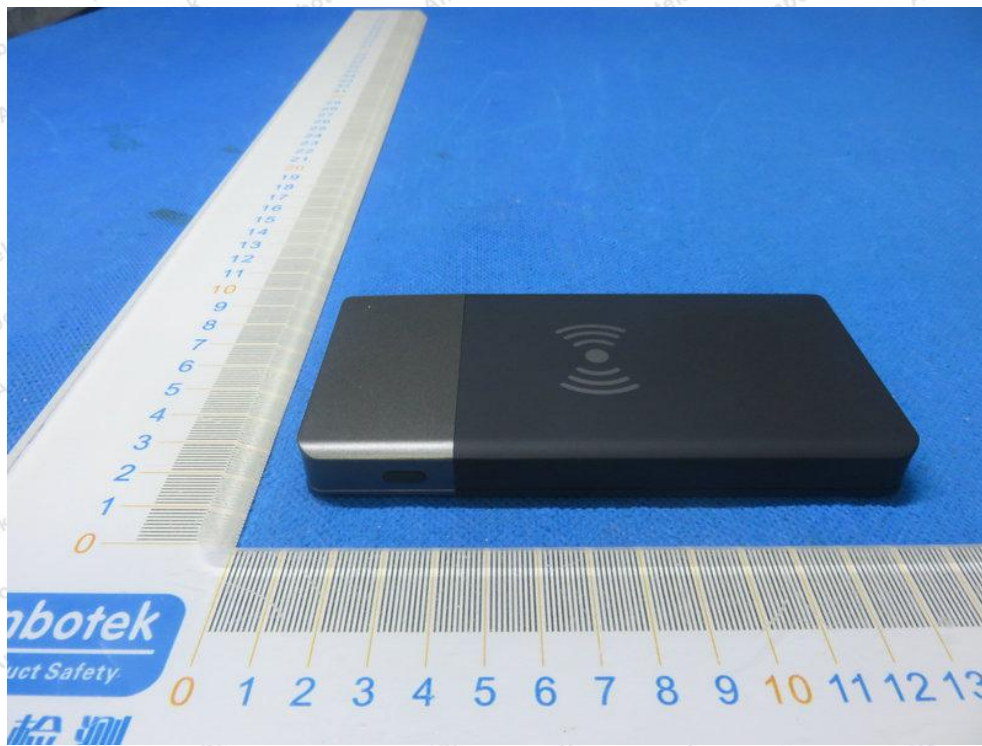




THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

APPENDIX III -- INTERNAL PHOTOGRAPH

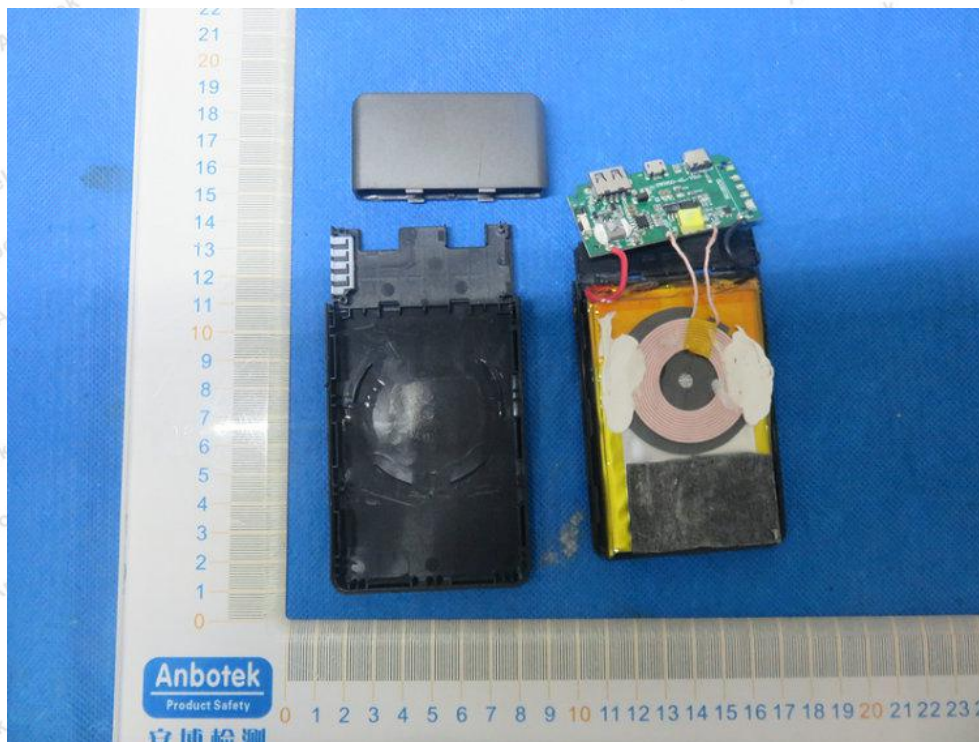

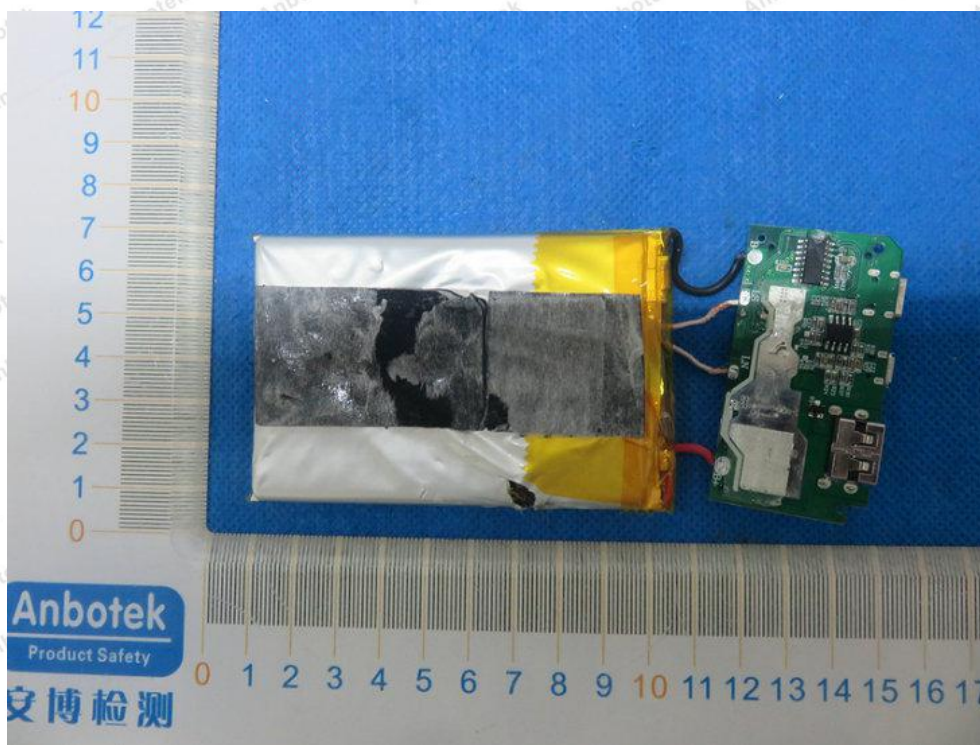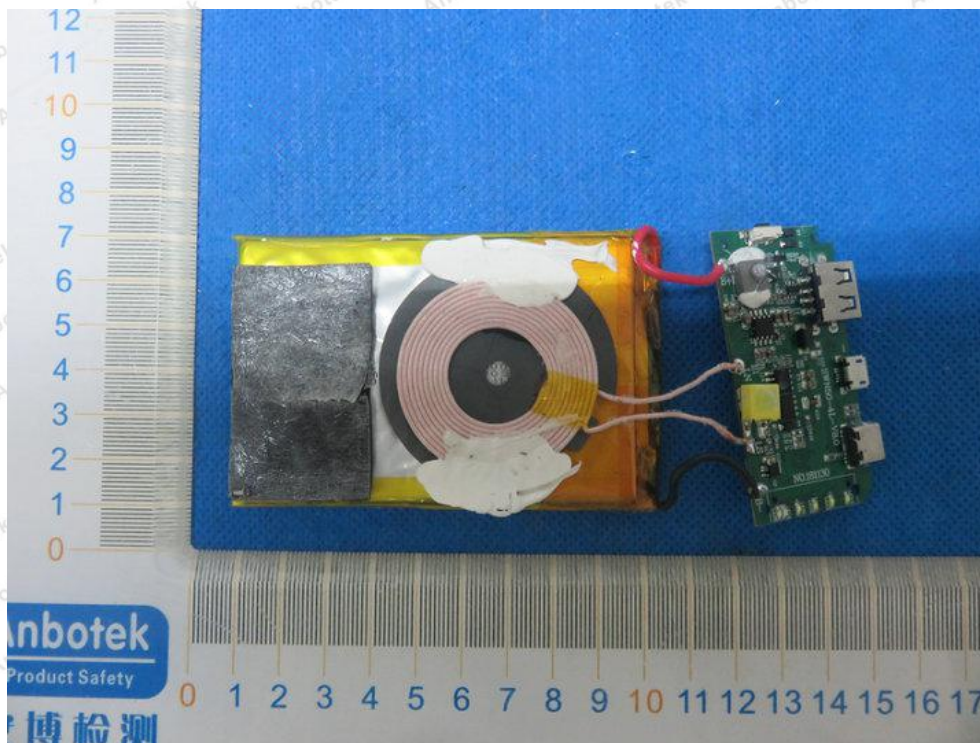

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-05-29. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Anbotech



Product Safety

安博检测

Anbotech Testing

Report No.: SZAWW190506002-01E

Page 38 of 38

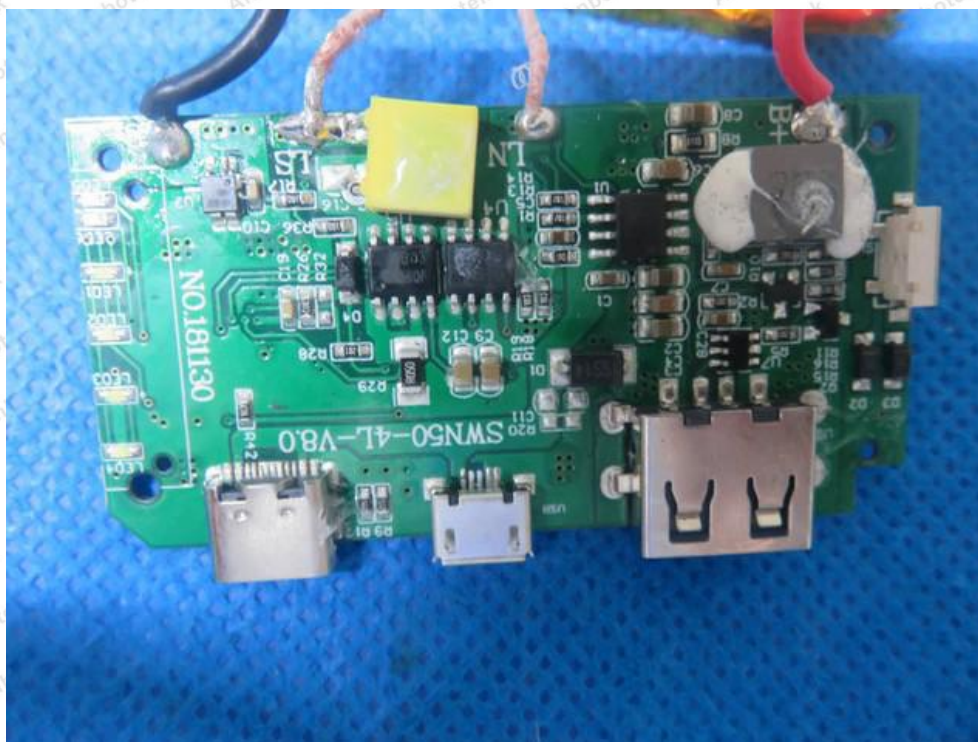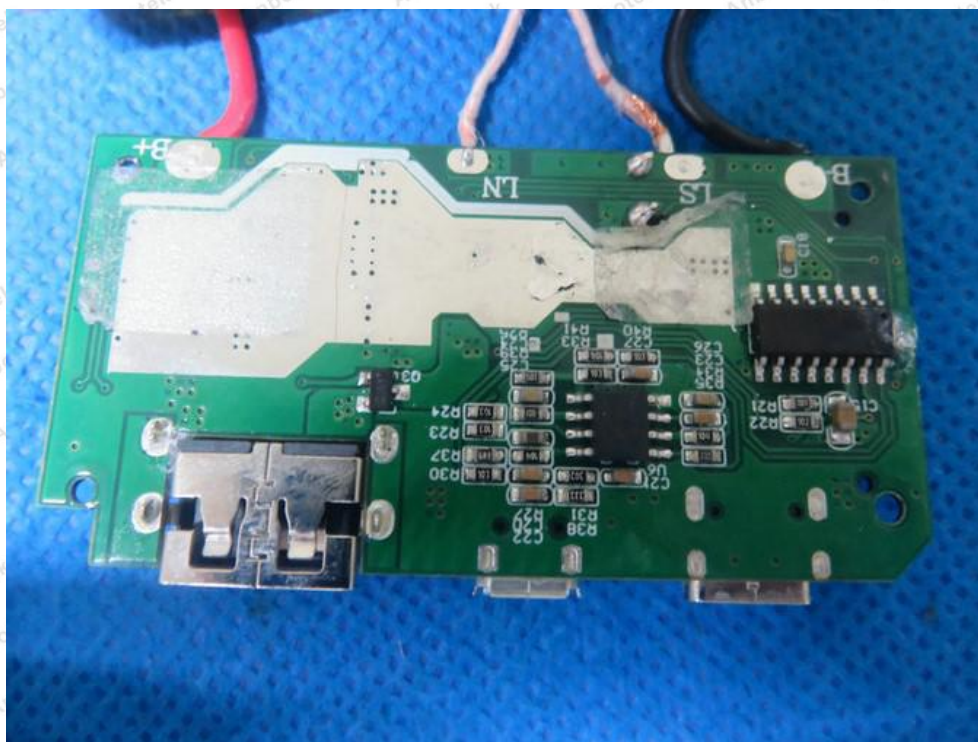

----- End of Report -----

Shenzhen Anbotech Compliance Laboratory Limited

Code: AB-RF-04-a

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com