



# ETSI EN 300328 RADIO TEST REPORT

On Behalf of

Model No.:BS-165

Prepared for :

Address :

Prepared By : BST Technology (Shenzhen) Co.,Ltd.

Address : No.7,New Era Industrial Zone, Guantian,Bao'an  
District,Shenzhen,Guangdong,China

Report Number : BSTXD190512579401RF

Date of Receipt : May 27~June 03, 2019

Date of Test : May 28, 2019

Date of Report : June 03, 2019



## TABLE OF CONTENTS

| Description                                                           | Page |
|-----------------------------------------------------------------------|------|
| 1. General Information.....                                           | 5    |
| 1.1. Description of Device (EUT).....                                 | 5    |
| 1.2. Categorization.....                                              | 10   |
| 1.3. Test Lab Information.....                                        | 10   |
| 2. Summary of Measurement.....                                        | 11   |
| 2.1. Test Standard Description.....                                   | 11   |
| 2.2. Summary of Test Result.....                                      | 11   |
| 2.3. Block Diagram of Configuration for Test.....                     | 12   |
| 2.4. Test Mode.....                                                   | 12   |
| 2.5. Test Conditions.....                                             | 12   |
| 2.6. Measurement Uncertainty (95% confidence levels, k=2).....        | 13   |
| 2.7. Test Equipment.....                                              | 13   |
| 3. RF Output Power.....                                               | 15   |
| 3.1. Limit.....                                                       | 15   |
| 3.2. Test Setup.....                                                  | 15   |
| 3.3. Test Procedure.....                                              | 15   |
| 3.4. Test Result.....                                                 | 16   |
| 4. Dwell Time, Minimum Frequency Occupation and Hopping Sequence..... | 22   |
| 4.1. Limit.....                                                       | 22   |
| 4.2. Test Setup.....                                                  | 22   |
| 4.3. Test Procedure.....                                              | 23   |
| 4.4. Test Result.....                                                 | 23   |
| 5. Hopping Frequency Separation.....                                  | 26   |
| 5.1. Limit.....                                                       | 26   |
| 5.2. Test Setup.....                                                  | 26   |
| 5.3. Test Procedure.....                                              | 26   |
| 5.4. Test Result.....                                                 | 26   |
| Adaptivity.....                                                       | 27   |
| 5.5. Limit.....                                                       | 27   |
| 5.6. Test Setup.....                                                  | 27   |
| 5.7. Test Procedure.....                                              | 28   |
| 5.8. Test Result.....                                                 | 28   |
| 6. Occupied Channel Bandwidth.....                                    | 29   |
| 6.1. Limit.....                                                       | 29   |
| 6.2. Test Setup.....                                                  | 29   |
| 6.3. Test Procedure.....                                              | 29   |
| 6.4. Test Result.....                                                 | 30   |
| 7. Transmitter Unwanted Emissions in the Out-of-band Domain.....      | 31   |



|                                                               |    |
|---------------------------------------------------------------|----|
| 7.1. Limit.....                                               | 31 |
| 7.2. Test Setup.....                                          | 31 |
| 7.3. Test Procedure.....                                      | 32 |
| 7.4. Test Result.....                                         | 32 |
| 8. Transmitter Unwanted Emissions in the Spurious Domain..... | 35 |
| 8.1. Limit.....                                               | 35 |
| 8.2. Test Procedure.....                                      | 35 |
| 8.3. Test Result.....                                         | 36 |
| 9. Receiver Spurious Emissions.....                           | 38 |
| 9.1. Limit.....                                               | 38 |
| 9.2. Test Procedure.....                                      | 38 |
| 9.3. Test Result.....                                         | 38 |
| 10. Receiver Blocking.....                                    | 39 |
| 10.1. Limit.....                                              | 39 |
| 10.2. Test Setup.....                                         | 40 |
| 10.3. Test Procedure.....                                     | 40 |
| 10.4. Test Result.....                                        | 40 |
| 11. Geo-location Capability.....                              | 41 |
| 11.1. Definition.....                                         | 41 |
| 11.2. Requirements.....                                       | 41 |
| 11.3. Test Result.....                                        | 41 |
| 12. Photos of Test Setup.....                                 | 42 |
| 13. Photos of EUT.....                                        | 44 |



## TEST REPORT DECLARATION

Applicant :  
Address :  
Manufacturer :  
Address :  
EUT Description : Bluetooth speaker  
(A) Model No. : BS-165,P328.321,BS-166,BS-200,BS-199,BS-198,  
BS-197,BS-196,BS-195  
(B) Trademark : N/A

Measurement Standard Used:

**ETSI EN 300 328 V2.1.1**

The device described above is tested by BST Technology (Shenzhen) Co.,Ltd. The measurement results are contained in this test report and BST Technology (Shenzhen) Co.,Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 300 328 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of BST Technology (Shenzhen) Co.,Ltd.

Tested by (name + signature).....  
RVVVk Yang  
Project Engineer  
Test Engineer  
Approved by (name + signature).....  
SiVVVVuan  
Project Manager  
Manager  
Supervisor

Date of issue..... June 03, 2019



# 1. General Information

## 1.1. Description of Device (EUT)

|                        |                                                                        |
|------------------------|------------------------------------------------------------------------|
| EUT Name               | : Bluetooth speaker                                                    |
| Trademark              | : N/A                                                                  |
| Model No.              | : BS-165,P328.321,BS-166,BS-200,BS-199,BS-198,BS-197,<br>BS-196,BS-195 |
| DIFF.                  | : N/A                                                                  |
| Power supply           | : DC 5V                                                                |
| Operation frequency    | : 2402MHz-2480MHz                                                      |
| Modulation             | : GFSK, $\pi/4$ DQPSK, 8 - DPSK                                        |
| Antenna Type           | : PCB Antenna                                                          |
| RF Output Power:       | 3.57dBm                                                                |
| Software version       | : V1.0                                                                 |
| Hardware version       | : V1.0                                                                 |
| Intend use environment | : Residential, commercial and light industrial environment             |

**a) The type of modulation used by the equipment:**☒ FHSS☐ other forms of modulation**b) In case of FHSS modulation:**

- In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies:

- In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies: 79

The minimum number of Hopping Frequencies: 79

The Dwell Time: 312.42ms maximum

The Minimum Channel Occupation Time: 1249.68ms maximum

**c) Adaptive / non-adaptive equipment:**☐ non-adaptive Equipment☒ adaptive Equipment without the possibility to switch to a non-adaptive mode☐ adaptive Equipment which can also operate in a non-adaptive mode**d) In case of adaptive equipment:**

The Channel Occupancy Time implemented by the equipment: 1216.4ms

☐ The equipment has implemented an LBT based DAA mechanism

- In case of equipment using modulation different from FHSS:

☐ The equipment is Frame Based equipment☐ The equipment is Load Based equipment☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: .....  $\mu$ s

The value q as referred to in clause 4.3.2.5.2.2.2 .....

☒ The equipment has implemented a non-LBT based DAA mechanism☐ The equipment can operate in more than one adaptive mode**e) In case of non-adaptive Equipment:**

The maximum RF Output Power (e.i.r.p.): 3.62dBm

The maximum (corresponding) Duty Cycle: ..... %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

**f) The worst case operational mode for each of the following tests:**

- RF Output Power

GFSK

- Power Spectral Density

.....

- Duty cycle, Tx-Sequence, Tx-gap

.....



- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)  
GFSK
- Hopping Frequency Separation (only for FHSS equipment)  
GFSK
- Medium Utilisation

- .....
- Adaptivity & Receiver Blocking
- .....

- Occupied Channel Bandwidth  
GFSK
- Transmitter unwanted emissions in the OOB domain  
GFSK
- Transmitter unwanted emissions in the spurious domain  
GFSK
- Receiver spurious emissions  
GFSK

**g) The different transmit operating modes (tick all that apply):**

- Operating mode 1: Single Antenna Equipment
  - Equipment with only 1 antenna
  - ☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
  - ☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
  - ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
  - ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
  - ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
  - ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
  - ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
  - ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

**h) In case of Smart Antenna Systems:**

- The number of Receive chains: .....
- The number of Transmit chains: .....
  - ☐ symmetrical power distribution
  - ☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: .....

NOTE: Beam forming gain does not include the basic gain of a single antenna.

**i) Operating Frequency Range(s) of the equipment:**

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China  
Certificate Search: <http://www.bst-lab.com>, Tel:400-882-9628,8009990305,E-mail:[christina@bst-lab.com](mailto:christina@bst-lab.com)



- Operating Frequency Range 1: 2402 MHz to 2480 MHz
- Operating Frequency Range 2: ..... MHz to ..... MHz

NOTE: Add more lines if more Frequency Ranges are supported.

**j) Occupied Channel Bandwidth(s):**

Occupied Channel Bandwidth 1: 1.2216MHz

Occupied Channel Bandwidth 2:

NOTE: Add more lines if more channel bandwidths are supported.

**k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):**

■ Stand-alone

☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

☐ Plug-in radio device (Equipment intended for a variety of host systems)

Other .....

**l) The extreme operating conditions that apply to the equipment:**

Operating temperature range: -20° C to 35° C

Operating voltage range: 4.5V to 5.5V    ☐ AC    ■ DC

Details provided are for the: ■ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

**m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:**

• Antenna Type

■ PCB Antenna

Antenna Gain: 0dBi

If applicable, additional beamforming gain (excluding basic antenna gain): ..... dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels: .....

Power Level 1: ..... dBm

Power Level 2: ..... dBm

Power Level 3: ..... dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel:400-882-9628,8009990305,E-mail:christina@bst-lab.com



Details provided are for the: ☒stand-alone equipment

☐combined (or host) equipment

☐test jig

Supply Voltage ☐AC mains State AC voltage ..... V

☒ DC State DC voltage :5V

In case of DC, indicate the type of power source

☐Internal Power Supply

☐External Power Supply or AC/DC adapter

☒Battery: 5V

☐Other: .....

**o) Describe the test modes available which can facilitate testing:**

The EUT can be into the Engineer mode for testing.

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):**

Bluetooth

**q) If applicable, the statistical analysis referred to in clause 5.4.1 q)**

Not apply

**r) If applicable, the statistical analysis referred to in clause 5.4.1 r)**

Not apply

**s) Geo-location capability supported by the equipment:**

☐Yes

☐The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

☒No

**t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):**

The minimum performance criterion shall be a PER less than or equal to 10 %.

The intended use of the equipment should be in the normal operation without lost the communication link or no unintentionally operation occurs.



## 1.2. Categorization

### ☐ Receiver category 1

Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

### ☒ Receiver category 2

Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of Bm e.i.r.p. shall be considered as receiver category 2 equipment.

### ☐ Receiver category 3

Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.

## 1.3. Test Lab Information

BST Technology (Shenzhen) Co.,Ltd.

No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China



## 2. Summary of Measurement

### 2.1. Test Standard Description

ETSI EN 300 328 V2.1.1: Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

### 2.2. Summary of Test Result

| The following essential requirements and test specifications are relevant to the presumption of conformity under ETSI EN 300 328 V2.1.1                          |                                                                   |           |         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-----------|---------|
| No                                                                                                                                                               | Test Parameter                                                    | Clause No | Results |
| Transmitter Parameters                                                                                                                                           |                                                                   |           |         |
| 1                                                                                                                                                                | RF output power                                                   | 4.3.2.2   | PASS    |
| 2                                                                                                                                                                | Power Spectral Density                                            | 4.3.2.3   | N/A     |
| 3                                                                                                                                                                | Duty Cycle, Tx-sequence, Tx-gap                                   | 4.3.2.4   | N/A     |
| 4                                                                                                                                                                | Dwell time, Minimum Frequency Occupation & Hopping Sequence       | 4.3.1.4   | PASS    |
| 5                                                                                                                                                                | Hopping Frequency Separation                                      | 4.3.1.5   | PASS    |
| 6                                                                                                                                                                | Medium Utilisation (MU) factor                                    | 4.3.2.5   | N/A     |
| 7                                                                                                                                                                | Adaptivity (adaptive equipment using modulations other than FHSS) | 4.3.2.6   | N/A     |
| 8                                                                                                                                                                | Occupied Channel Bandwidth                                        | 4.3.2.7   | PASS    |
| 9                                                                                                                                                                | Transmitter unwanted emissions in the out-of-band domain          | 4.3.2.8   | PASS    |
| 10                                                                                                                                                               | Transmitter unwanted emissions in the spurious domain             | 4.3.2.9   | PASS    |
| Receiver Parameters                                                                                                                                              |                                                                   |           |         |
| 11                                                                                                                                                               | Receiver spurious emissions                                       | 4.3.2.10  | PASS    |
| 12                                                                                                                                                               | Receiver Blocking                                                 | 4.3.2.11  | PASS    |
| 13                                                                                                                                                               | Geo-location capability                                           | 4.3.2.12  | N/A     |
| Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device. |                                                                   |           |         |



## 2.3. Block Diagram of Configuration for Test

EUT

## 2.4. Test Mode

The special RF test software was used to control EUT work in Continuous Bluetooth TX mode, and select test channel, wireless mode.

| Tested mode, channel, and data rate information |                     |              |                    |
|-------------------------------------------------|---------------------|--------------|--------------------|
| Mode                                            | data rate<br>(Mbps) | Channel      | Frequency<br>(MHz) |
| BDR:GFSK                                        | 1                   | Low :CH0     | 2402               |
|                                                 | 1                   | Middle: CH39 | 2441               |
|                                                 | 1                   | High: CH78   | 2480               |
| EDR:8-DPSK                                      | 3                   | Low :CH0     | 2402               |
|                                                 | 3                   | Middle: CH39 | 2441               |
|                                                 | 3                   | High: CH78   | 2480               |

## 2.5. Test Conditions

|                                                                                                      | Normal Conditions  | Extreme Conditions                              |
|------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------|
| Temperature range                                                                                    | 15-35℃             | -20℃ and 35℃                                    |
| Humidity range                                                                                       | 20-75%             | 20-75%                                          |
| Pressure range                                                                                       | 86-106kPa          | 86-106kPa                                       |
| Power supply                                                                                         | DC 5V from battery | 4.5V and 5.5V ( declared by the manufacturer. ) |
| Note 1: The test procedure described in clause 5.1 of EN300 328 was used for extreme test procedure. |                    |                                                 |
| 2: The Extreme Temperature and Extreme Voltages declared by the manufacturer.                        |                    |                                                 |



## 2.6. Measurement Uncertainty (95% confidence levels, k=2)

| Item                                                                     | MU                   | Remark      |
|--------------------------------------------------------------------------|----------------------|-------------|
| Uncertainty for Conducted Emission Test                                  | 2.74dB               |             |
| Uncertainty for Radiation Emission test in 3m chamber<br>(30MHz to 1GHz) | 3.77dB               | Polarize: V |
|                                                                          | 3.80dB               | Polarize: H |
| Uncertainty for Radiation Emission test in 3m chamber<br>(1GHz to 25GHz) | 4.16dB               | Polarize: H |
|                                                                          | 4.13dB               | Polarize: V |
| Uncertainty for radio frequency                                          | $5.4 \times 10^{-8}$ |             |
| Uncertainty for conducted RF Power                                       | 0.37dB               |             |

## 2.7. Test Equipment

| Equipment               | Manufacturer  | Model No.           | Serial No.             | Last cal.  | Cal. Due day |
|-------------------------|---------------|---------------------|------------------------|------------|--------------|
| Bilog Antenna           | SCHWARZBECK   | VULB 9168           | 9168-4 38              | 2018.09.30 | 2019.09.29   |
| Test Receiver           | ROHDE&SCHWARZ | ESCI                | 101165                 | 2018.09.22 | 2019.09.21   |
| Spectrum analyzer       | Agilent       | E4407B              | MY49510055             | 2018.09.23 | 2019.09.22   |
| Horn Antenna            | SCHWARZBECK   | BBHA 9120 D         | BBHA 9120 D(1201)      | 2018.09.30 | 2019.09.29   |
| Filter                  | KANGMAI       | ZLPF-LDC-1000- 1959 | 1209002075             | 2018.09.22 | 2019.09.21   |
| Filter                  | WAINWRIGHT    | WHKX2.80 /18G- 12SS | SN1                    | 2018.09.22 | 2019.09.21   |
| RF Cable                | Resenberger   | Cable 4             | N/A                    | 2018.09.22 | 2019.09.21   |
| CMU200                  | ROHDE&SCHWARZ | CMU200              | 116785                 | 2018.09.22 | 2019.09.21   |
| Signal Analyzer         | Agilent       | N9020A              | MY499100060            | 2018.09.23 | 2019.09.22   |
| vector Signal Generator | Agilent       | N5182A              | MY49060042             | 2018.09.22 | 2019.09.21   |
| vector Signal Generator | Agilent       | E4438C              | US44271917             | 2018.09.28 | 2019.09.27   |
| Amplifier               | HP            | HP8347A             | 2834A00455             | 2018.09.23 | 2019.09.22   |
| Amplifier               | Teseq         | LNA6901             | 72718                  | 2018.09.23 | 2019.09.22   |
| Amplifier               | Agilent       | 8449B               | 3008A02664             | 2018.09.23 | 2019.09.22   |
| Filter                  | WAINWRIGHT    | WHKX1.0G/15G- 10SS  | SN40                   | 2018.09.22 | 2019.09.21   |
| Test Receiver           | ROHDE&SCHWARZ | ESR                 | 1316.3003K03-102082-Wa | 2018.09.23 | 2019.09.22   |
| Bilog Antenna           | SCHWARZBECK   | VULB 9168           | 9168-438               | 2018.09.30 | 2019.09.29   |
| 9*6*6 anechoic chamber  | CHENYU        | 9*6*6               | N/A                    | 2018.07.21 | 2020.07.20   |

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel:400-882-9628,8009990305,E-mail:christina@bst-lab.com



BST Technology (Shenzhen) Co.,Ltd.

Report No.: BSTXD190512579401RF

|                                    |               |            |                        |            |            |
|------------------------------------|---------------|------------|------------------------|------------|------------|
| RF Cable                           | Resenberger   | Cable 1    | N/A                    | 2018.09.22 | 2019.09.21 |
| RF Cable                           | Resenberger   | Cable 2    | N/A                    | 2018.09.22 | 2019.09.21 |
| RF Cable                           | Resenberger   | Cable 3    | N/A                    | 2018.09.28 | 2019.09.27 |
| Power Sensor                       | Power Radio   | RPR3006W   | 15100041SNO91          | 2018.09.23 | 2019.09.22 |
| Power Sensor                       | Power Radio   | RPR3006W   | 15100041SNO92          | 2018.09.23 | 2019.09.22 |
| CMW500                             | ROHDE&SCHWARZ | CMW500     | 1201.0002K50-117239-sM | 2018.09.22 | 2019.09.21 |
| Loop Antenna                       | SCHWARZBECK   | FMZB 1519B | 00005                  | 2018.09.29 | 2019.09.28 |
| Audio Analyzer                     | ROHDE&SCHWARZ | UPL        | 100689                 | 2018.06.15 | 2019.06.15 |
| Attenuator                         | HP            | 8494B      | DC-18G                 | 2018.10.22 | 2019.10.23 |
| Attenuator                         | HP            | 8496B      | DC-18G                 | 2018.10.22 | 2019.10.23 |
| Temperature& Humidity test chamber | GZGONGWEN     | GDS-250    | 080821                 | 2018.10.22 | 2019.10.23 |
| 20dB Attenuator                    | ICPROBING     | IATS1      | 82347                  | 2018.09.22 | 2019.09.21 |
| L.I.S.N.#1                         | Schwarzbeck   | NSLK8126   | 8126466                | 2018.09.22 | 2019.09.21 |
| L.I.S.N.#2                         | ROHDE&SCHWARZ | ENV216     | 101043                 | 2018.09.22 | 2019.09.21 |



### 3. RF Output Power

#### 3.1. Limit


For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.4.1. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

| Limit |
|-------|
| 20dBm |

#### 3.2. Test Setup

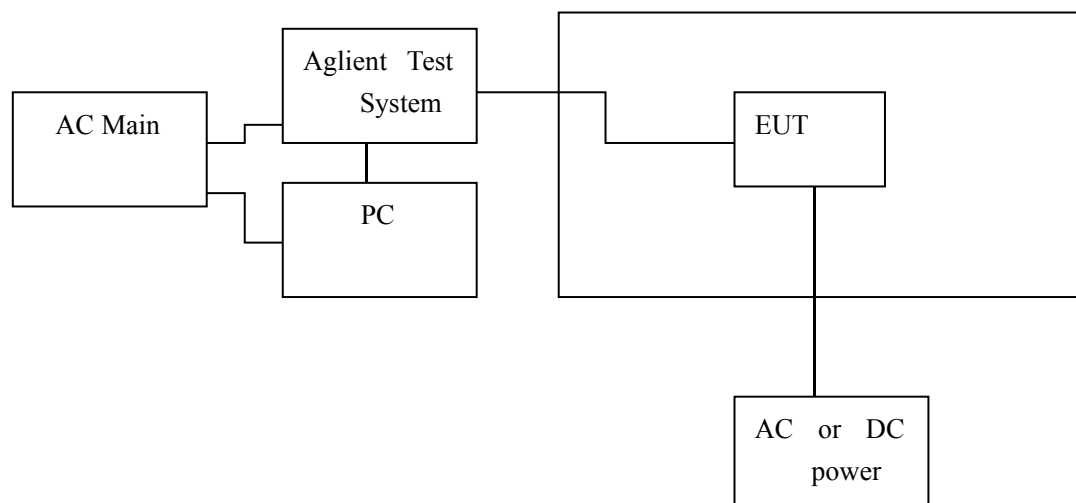

#### 3.3. Test Procedure

Refer to ETSI EN 300 328 2.1.1 (2016-11) Clause 5.4.2.



### 3.4. Test Result

| Test site: RF site |                  |                                      |                    |              |
|--------------------|------------------|--------------------------------------|--------------------|--------------|
| Cable loss: 0.6dB  |                  |                                      | Antenna Gain: 0dBi |              |
| Sample speed       |                  | Sample speed 1 MS/s for power sensor |                    |              |
| Number of Burst    |                  | At least 10                          |                    |              |
| Mode               | Condition        | CH                                   | Result             | Limit        |
|                    |                  |                                      | Total e.i.r.p（dBm） | e.i.r.p（dBm） |
| GFSK               | Normal<br>25℃/5V | CH0                                  | 3.57               | <20          |
|                    |                  | CH39                                 | 2.33               | <20          |
|                    |                  | CH78                                 | 1.62               | <20          |
|                    | -20℃/4.5V        | CH0                                  | 3.41               | <20          |
|                    |                  | CH39                                 | 2.42               | <20          |
|                    |                  | CH78                                 | 1.45               | <20          |
|                    | -20℃/5.5V        | CH0                                  | 3.38               | <20          |
|                    |                  | CH39                                 | 2.34               | <20          |
|                    |                  | CH78                                 | 1.44               | <20          |
|                    | 55℃/4.5V         | CH0                                  | 3.38               | <20          |
|                    |                  | CH39                                 | 2.35               | <20          |
|                    |                  | CH78                                 | 1.37               | <20          |
|                    | 55℃/5.5V         | CH0                                  | 3.43               | <20          |
|                    |                  | CH39                                 | 2.36               | <20          |
|                    |                  | CH78                                 | 1.47               | <20          |
| Conclusion: PASS   |                  |                                      |                    |              |



| Test site: RF site |                  |                                      |                    |                    |
|--------------------|------------------|--------------------------------------|--------------------|--------------------|
| Cable loss: 0.6dB  |                  |                                      |                    | Antenna Gain: 0dBi |
| Sample speed       |                  | Sample speed 1 MS/s for power sensor |                    |                    |
| Number of Burst    |                  | At least 10                          |                    |                    |
| Mode               | Condition        | CH                                   | Result             | Limit              |
|                    |                  |                                      | Total e.i.r.p（dBm） | e.i.r.p（dBm）       |
| $\pi/4$<br>DQPSK   | Normal<br>25℃/5V | CH0                                  | 3.53               | <20                |
|                    |                  | CH39                                 | 2.35               | <20                |
|                    |                  | CH78                                 | 1.56               | <20                |
|                    | -20℃/4.5V        | CH0                                  | 3.35               | <20                |
|                    |                  | CH39                                 | 2.12               | <20                |
|                    |                  | CH78                                 | 1.37               | <20                |
|                    | -20℃/5.5V        | CH0                                  | 3.34               | <20                |
|                    |                  | CH39                                 | 2.26               | <20                |
|                    |                  | CH78                                 | 1.32               | <20                |
|                    | 55℃/4.5V         | CH0                                  | 3.37               | <20                |
|                    |                  | CH39                                 | 2.25               | <20                |
|                    |                  | CH78                                 | 1.38               | <20                |
|                    | 55℃/5.5V         | CH0                                  | 3.31               | <20                |
|                    |                  | CH39                                 | 2.26               | <20                |
|                    |                  | CH78                                 | 1.32               | <20                |
| Conclusion: PASS   |                  |                                      |                    |                    |




| Test site: RF site |                  |                                      |                    |                    |
|--------------------|------------------|--------------------------------------|--------------------|--------------------|
| Cable loss: 0.6dB  |                  |                                      |                    | Antenna Gain: 0dBi |
| Sample speed       |                  | Sample speed 3 MS/s for power sensor |                    |                    |
| Number of Burst    |                  | At least 10                          |                    |                    |
| Mode               | Condition        | CH                                   | Result             | Limit              |
|                    |                  |                                      | Total e.i.r.p（dBm） | e.i.r.p（dBm）       |
| 8-DPSK             | Normal<br>25℃/5V | CH0                                  | 3.51               | <20                |
|                    |                  | CH39                                 | 2.44               | <20                |
|                    |                  | CH78                                 | 1.41               | <20                |
|                    | -20℃/4.5V        | CH0                                  | 3.35               | <20                |
|                    |                  | CH39                                 | 2.27               | <20                |
|                    |                  | CH78                                 | 1.22               | <20                |
|                    | -20℃/5.5V        | CH0                                  | 3.36               | <20                |
|                    |                  | CH39                                 | 2.23               | <20                |
|                    |                  | CH78                                 | 1.27               | <20                |
|                    | 55℃/4.5V         | CH0                                  | 3.25               | <20                |
|                    |                  | CH39                                 | 2.21               | <20                |
|                    |                  | CH78                                 | 1.17               | <20                |
|                    | 55℃/5.5V         | CH0                                  | 3.35               | <20                |
|                    |                  | CH39                                 | 2.23               | <20                |
|                    |                  | CH78                                 | 1.19               | <20                |
| Conclusion: PASS   |                  |                                      |                    |                    |


Remark: This Report only show the test plots of the worst case.



| Channel             | Voltage | Conducted Power (dBm) | EIRP (dBm) |
|---------------------|---------|-----------------------|------------|
| GFSK<br>CH Low-2402 | Normal  | 1.35                  | 1.35       |

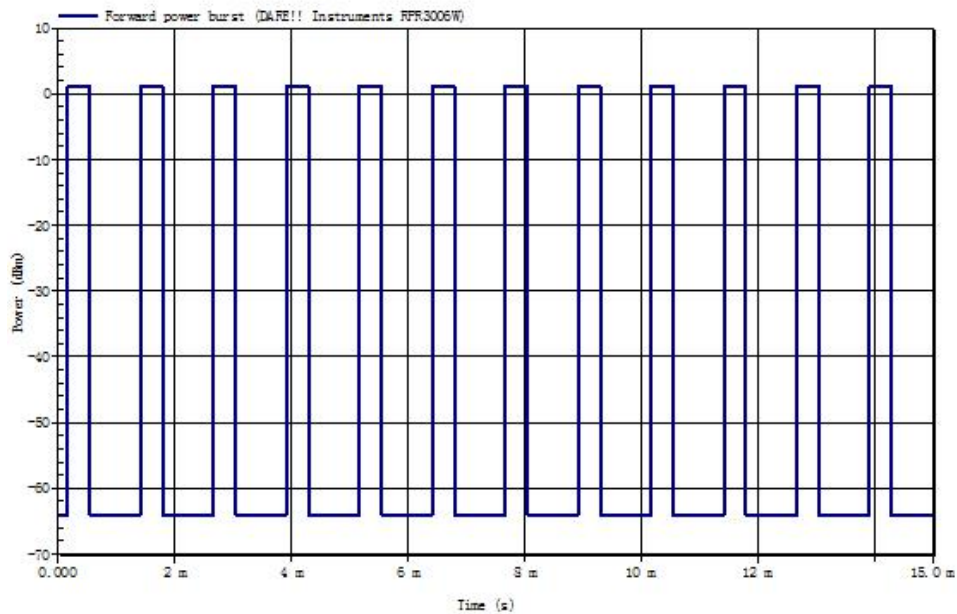


| Channel             | Voltage | Conducted Power (dBm) | EIRP (dBm) |
|---------------------|---------|-----------------------|------------|
| GFSK<br>CH Mid-2441 | Normal  | 0.23                  | 0.23       |

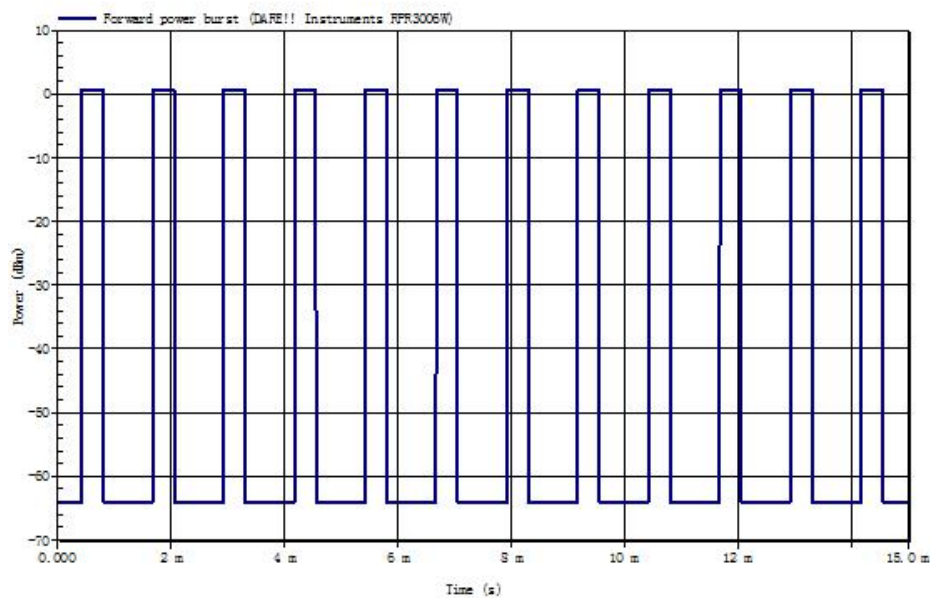



| Channel              | Voltage | Conducted Power (dBm) | EIRP (dBm) |
|----------------------|---------|-----------------------|------------|
| GFSK<br>CH High-2480 | Normal  | -0.65                 | 1.67       |

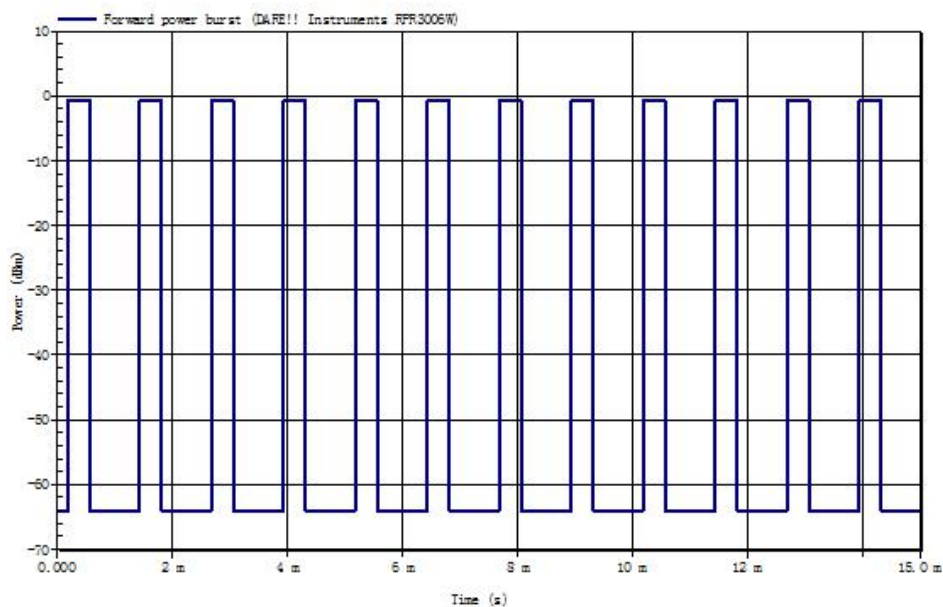



## 4. Dwell Time, Minimum Frequency Occupation and Hopping Sequence

### 4.1. Limit

#### **For Adaptive frequency hopping systems**

Adaptive Frequency Hopping systems shall be capable of operating over a minimum of 70 % of the band specified in clause 1.

The maximum accumulated dwell time on any hopping frequency shall be 400 ms within any period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater. The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.

#### **For Non-adaptive frequency hopping systems**


The accumulated Dwell Time on any hopping frequency shall not be greater than 15 ms within any period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

Non-adaptive medical devices requiring reverse compatibility with other medical devices placed on the market when earlier versions of the present document were harmonised, are allowed to have an operating mode in which the maximum dwell time is 400 ms.

The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum

Hopping Frequency Separation in MHz, whichever is the greater. The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.

### 4.2. Test Setup





### 4.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.4

Connect the UUT to the spectrum analyzer and use the following settings:

|                  |                                                                        |
|------------------|------------------------------------------------------------------------|
| Centre Frequency | Equal to the hopping frequency being investigated                      |
| Frequency Span   | $2 \times$ Occupied Channel Bandwidth (e.g. 2 MHz for a 1 MHz channel) |
| RBW              | $\sim 50\%$ of the Occupied Channel Bandwidth (510KHz)                 |
| VBW              | $\geq$ RBW (510KHz)                                                    |
| Detector         | RMS                                                                    |
| sweep points     | 30 000                                                                 |
| Trace            | Clear / Write                                                          |
| Trigger          | Free Run                                                               |

### 4.4. Test Result

#### Hopping channel

| Mode   | Number of hopping channel | Limit | Conclusion |
|--------|---------------------------|-------|------------|
| GFSK   | 79                        | $>15$ | PASS       |
| 8-DPSK | 79                        | $>15$ | PASS       |

#### Operating hopping Bandwidth:

| Mode   | Bandwidth (MHz) | Limit(MHz) | Conclusion |
|--------|-----------------|------------|------------|
| GFSK   | 78.96           | $>58.45$   | PASS       |
| 8-DPSK | 79.05           | $>58.45$   | PASS       |

**Hopping sequence**

| Mode   | Hopping Sequence(%) | Limit | Conclusion |
|--------|---------------------|-------|------------|
| GFSK   | 95.45               | >70%  | PASS       |
| 8-DPSK | 95.45               | >70%  | PASS       |

Note: 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.

2. Hopping Sequence(%) = (20dB BW/83.5)\*100

**GFSK(1M) DH1:CH Mid-2441:**

|                                   |        |
|-----------------------------------|--------|
| Pulse Time (ms)                   | 0.396  |
| Dwell Time (ms)                   | 127.46 |
| Minimum Frequency Occupation (ms) | 509.78 |

**GFSK(1M) DH3:CH Mid-2441:**

|                                   |         |
|-----------------------------------|---------|
| Pulse Time (ms)                   | 1.656   |
| Dwell Time (ms)                   | 265.67  |
| Minimum Frequency Occupation (ms) | 1063.38 |

**GFSK(1M) DH5:CH Mid-2441:**

|                                   |         |
|-----------------------------------|---------|
| Pulse Time (ms)                   | 2.931   |
| Dwell Time (ms)                   | 312.63  |
| Minimum Frequency Occupation (ms) | 1249.76 |

**8DPSK(3M) DH1:CH Mid-2441:**

|                                   |        |
|-----------------------------------|--------|
| Pulse Time (ms)                   | 0.338  |
| Dwell Time (ms)                   | 110.64 |
| Minimum Frequency Occupation (ms) | 442.59 |

**8DPSK(3M) DH3:CH Mid-2441:**

|                                   |         |
|-----------------------------------|---------|
| Pulse Time (ms)                   | 1.645   |
| Dwell Time (ms)                   | 264.17  |
| Minimum Frequency Occupation (ms) | 1058.48 |



|                                          |         |
|------------------------------------------|---------|
| <b>8DPSK(3M) DH5:CH Mid-2441:</b>        |         |
| <b>Pulse Time (ms)</b>                   | 2.922   |
| <b>Dwell Time (ms)</b>                   | 311.37  |
| <b>Minimum Frequency Occupation (ms)</b> | 1245.91 |



## 5. Hopping Frequency Separation

### 5.1. Limit


For Non-adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth (see clause 4.3.1.8) of a single hop, with a minimum separation of 100 kHz.

For Adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be 100 kHz.

### 5.2. Test Setup



### 5.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.5

Connect the UUT to the spectrum analyzer and use the following settings:

|                  |                                                                           |
|------------------|---------------------------------------------------------------------------|
| Centre Frequency | Centre of the two adjacent hopping frequencies                            |
| Frequency Span   | Sufficient to see the complete power envelope of both hopping frequencies |
| RBW              | 1 % of the Span                                                           |
| VBW              | $3 \times \text{RBW}$ (20KHz)                                             |
| Detector         | Max Peak                                                                  |
| Trace            | Max hold                                                                  |
| Sweep time       | Auto                                                                      |

### 5.4. Test Result

| Mode   | Result (MHz) | Limit (MHz) | Conclusion |
|--------|--------------|-------------|------------|
| GFSK   | 0.989        | $> 0.1$     | PASS       |
| 8-DPSK | 0.995        | $> 0.1$     | PASS       |



## Adaptivity

### 5.5. Limit

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid:

- 1 The frequency shall remain unavailable for a minimum time equal to 1 second after which the channel maybe considered again as an 'available' channel;
- 2  $COT \leq 40 \text{ ms}$ ;
- 3 Idle Period = 5% of COT;
- 4 Detection threshold level =  $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$  ( $P_{out}$  in dBm);

LBT based Detect and Avoid (Frame Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us;
- 2 CCA observation time declared by the supplier;
- 3  $COT = 1 \sim 10 \text{ ms}$ ;
- 4 Idle Period = 5% of COT;
- 5 Detection threshold level =  $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$  ( $P_{out}$  in dBm);


LBT based Detect and Avoid (Load Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us;
- 2 CCA declared by the manufacturer;
- 3  $COT \leq (13 / 32) * q \text{ ms}$ ;  $q = [4 \sim 32]$ ; 1.625ms~13ms;
- 4 Detection threshold level =  $-73\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$  (dBm);

Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.

### 5.6. Test Setup

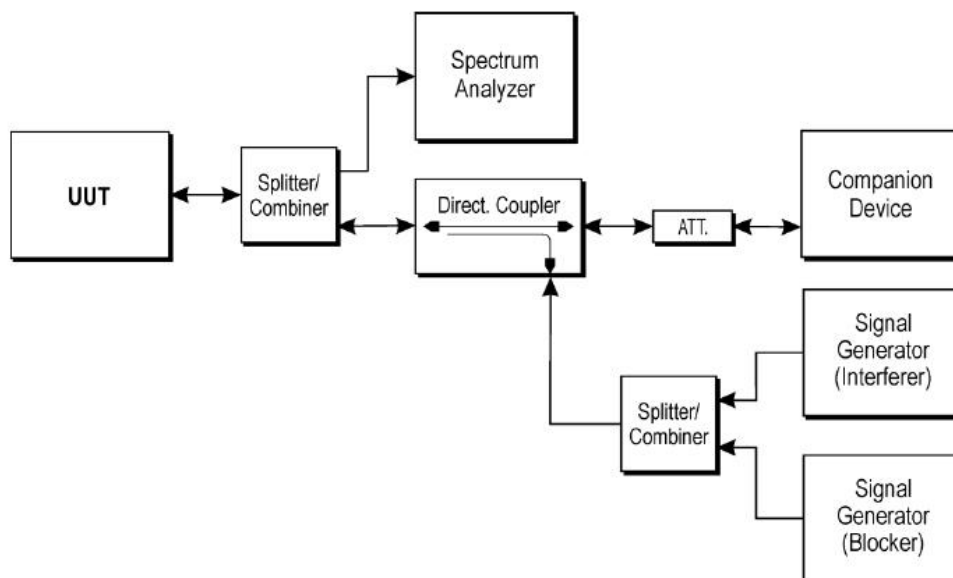



## 5.7. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.6.

## 5.8. Test Result

Not applicable

Note : The E.I.R.P. of EUT less than 10dBm, so not applicable.




## 6. Occupied Channel Bandwidth

### 6.1. Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz.

In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

### 6.2. Test Setup



### 6.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.7.

Connect the UUT to the spectrum analyzer and use the following settings:

|                  |                                                                      |
|------------------|----------------------------------------------------------------------|
| Centre Frequency | The centre frequency of the channel under test                       |
| Frequency Span   | $2 \times$ Nominal Channel Bandwidth (e.g. 2 MHz for a 1MHz channel) |
| RBW              | $\sim 1\%$ of the span without going below $1\%$ (20KHz)             |
| VBW              | $3 \times$ RBW (62KHz)                                               |
| Detector         | RMS                                                                  |
| Trace            | Max hold                                                             |
| Sweep Time       | 1s                                                                   |



## 6.4. Test Result

| Frequency Rang     |      |         |         |
|--------------------|------|---------|---------|
| Test mode          | CH   | Result  | Limit   |
|                    |      | MHz     | MHz     |
| GFSK               | CH0  | 2401.48 | >2400.0 |
|                    | CH78 | 2480.51 | <2483.5 |
| $\pi/4$ DQPSK      | CH0  | 2401.32 | >2400.0 |
|                    | CH78 | 2480.54 | <2483.5 |
| 8-DPSK             | CH0  | 2401.31 | >2400.0 |
|                    | CH78 | 2480.62 | <2483.5 |
| Test Result: PASS. |      |         |         |

| Occupied Bandwidth |                          |                  |
|--------------------|--------------------------|------------------|
| Test mode          | Occupied Bandwidth (MHz) |                  |
|                    | Lowest frequency         | Highest fequency |
| GFSK               | 0.9578                   | 0.9557           |
| $\pi/4$ DQPSK      | 1.2024                   | 1.20134          |
| 8-DPSK             | 1.2237                   | 1.2165           |
| Test Result: PASS. |                          |                  |

## 7. Transmitter Unwanted Emissions in the Out-of-band Domain

### 7.1. Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


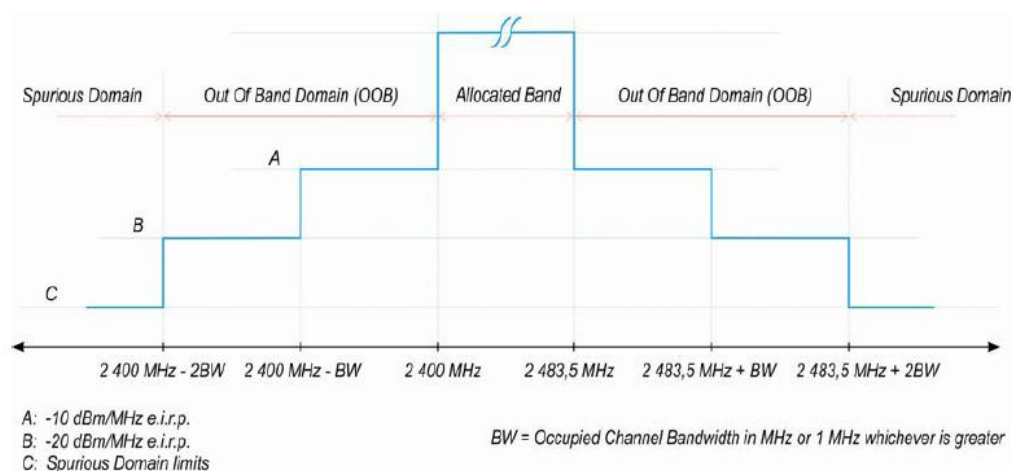


Figure 3: Transmit mask

### 7.2. Test Setup



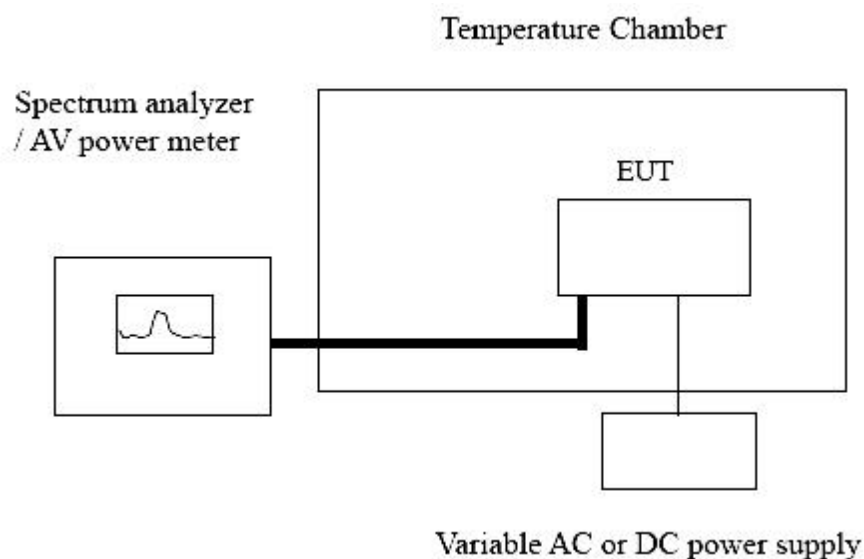

### 7.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.8.

Connect the UUT to the spectrum analyzer and use the following settings:

|              |                |
|--------------|----------------|
| RBW/ VBW     | 1MHz/3MHz      |
| Span         | 0Hz            |
| Filter mode  | Channel filter |
| Sweep mode   | Continuous     |
| Sweep Points | 5000           |
| Detector     | RMS            |
| Trace mode   | Clear / Write  |
| Trigger Mode | Video trigger  |

### 7.4. Test Result

GFSK Hopping mode :

| Test Condition                                                                                                 |        |          | Lower Band Edge     |                     | Higher Band Edge    |                     |
|----------------------------------------------------------------------------------------------------------------|--------|----------|---------------------|---------------------|---------------------|---------------------|
| Test Mode                                                                                                      | Temp   | Vol tage | Segment A (dBm/MHz) | Segment B (dBm/MHz) | Segment A (dBm/MHz) | Segment B (dBm/MHz) |
| GFSK                                                                                                           | Normal | Normal   | -37.725             | -37.842             | -38.645             | -41.557             |
| Limit                                                                                                          |        |          | <-10                | <-20                | <-10                | <-20                |
| Conclusion                                                                                                     |        |          | PASS                |                     |                     |                     |
| Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report. |        |          |                     |                     |                     |                     |

8-DPSK Hopping mode


| Test Condition                                                                                                 |        |          | Lower Band Edge     |                     | Higher Band Edge    |                     |
|----------------------------------------------------------------------------------------------------------------|--------|----------|---------------------|---------------------|---------------------|---------------------|
| Test Mode                                                                                                      | Temp   | Vol tage | Segment A (dBm/MHz) | Segment B (dBm/MHz) | Segment A (dBm/MHz) | Segment B (dBm/MHz) |
| 8-DPSK                                                                                                         | Normal | Normal   | -33.749             | -37.548             | -39.686             | -43.872             |
| Limit                                                                                                          |        |          | <-10                | <-20                | <-10                | <-20                |
| Conclusion                                                                                                     |        |          | PASS                |                     |                     |                     |
| Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report. |        |          |                     |                     |                     |                     |



NTNV


CH Low- GFSK

| Channel     | Antenna   | Frequency | Level   | Limit |
|-------------|-----------|-----------|---------|-------|
| CH Low-2402 | Antenna 1 | 2399.42   | -37.734 | <-10  |
| CH Low-2402 | Antenna 1 | 2398.745  | -37.085 | <-20  |

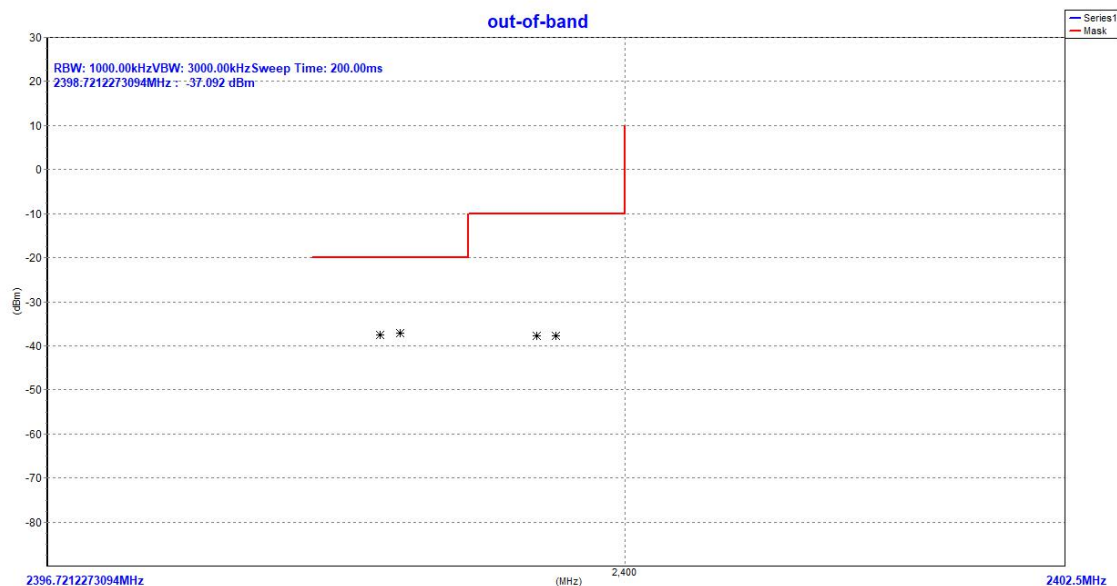

CH High- GFSK

| Channel      | Antenna   | Frequency | Level   | Limit |
|--------------|-----------|-----------|---------|-------|
| CH High-2480 | Antenna 1 | 2483.947  | -38.688 | <-10  |
| CH High-2480 | Antenna 1 | 2484.922  | -41.582 | <-20  |

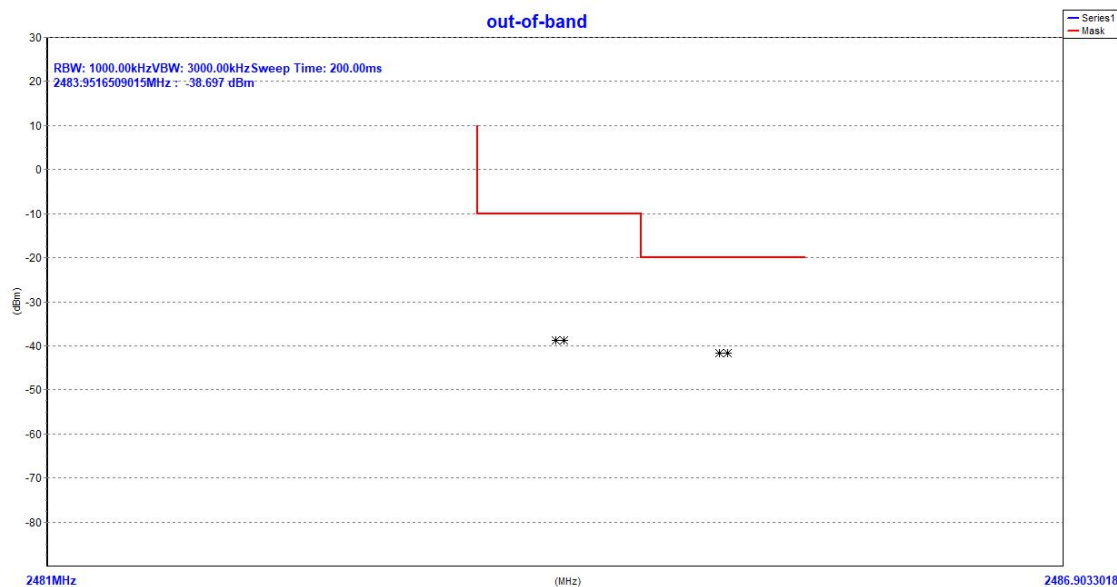


Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel:400-882-9628,8009990305,E-mail:christina@bst-lab.com




## CH Low-8-DPSK

| Channel     | Antenna   | Frequency | Level   | Limit |
|-------------|-----------|-----------|---------|-------|
| CH Low-2402 | Antenna 1 | 2399.256  | -33.745 | < -10 |
| CH Low-2402 | Antenna 1 | 2398.295  | -37.634 | < -20 |

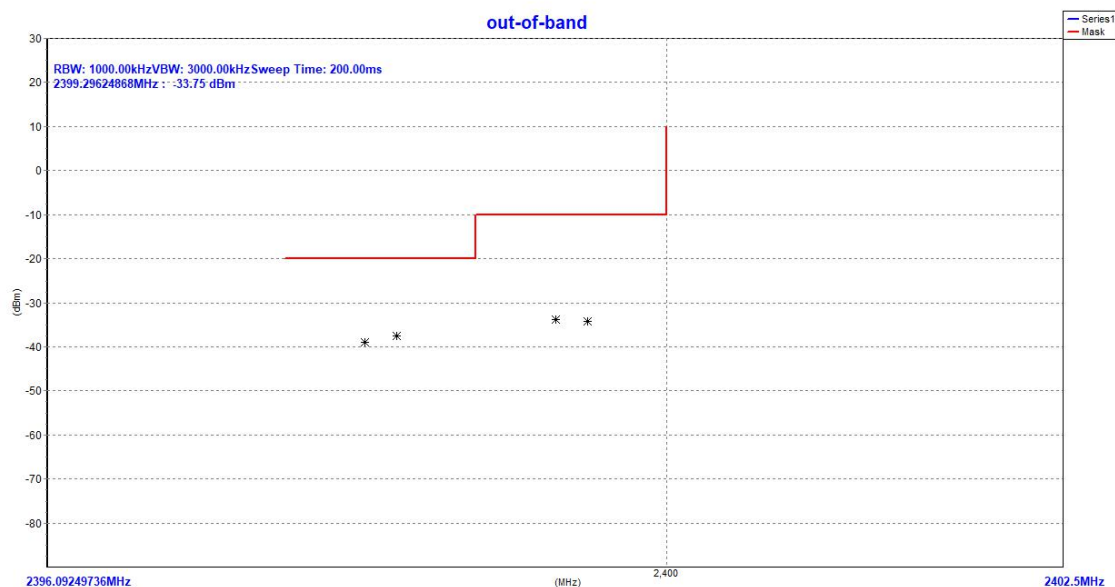

## CH High-8-DPSK

| Channel      | Antenna   | Frequency | Level   | Limit |
|--------------|-----------|-----------|---------|-------|
| CH High-2480 | Antenna 1 | 2484.21   | -39.686 | < -10 |
| CH High-2480 | Antenna 1 | 2485.172  | -43.891 | < -20 |

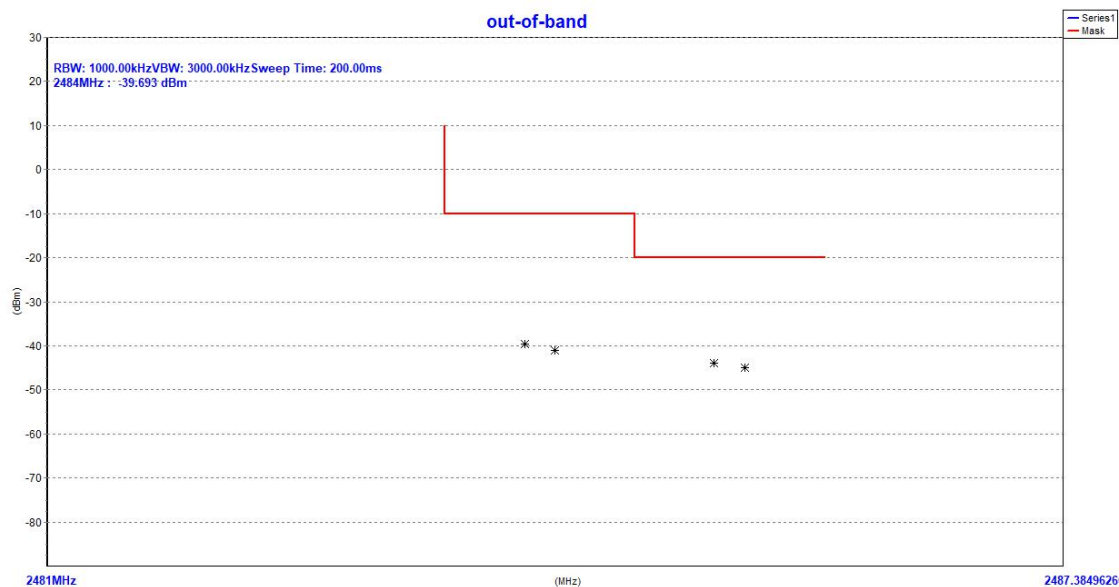



## 8. Transmitter Unwanted Emissions in the Spurious Domain

### 8.1. Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in following table .

| Frequency range     | Maximum power,<br>e.r.p. ( $\leq 1$ GHz)<br>e.i.r.p. ( $> 1$ GHz) | RBW/VBW        |
|---------------------|-------------------------------------------------------------------|----------------|
| 30 MHz to 47 MHz    | -36 dBm                                                           | 100 kHz/300KHz |
| 47 MHz to 74 MHz    | -54 dBm                                                           | 100 kHz/300KHz |
| 74 MHz to 87,5 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 87,5 MHz to 118 MHz | -54 dBm                                                           | 100 kHz/300KHz |
| 118 MHz to 174 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 174 MHz to 230 MHz  | -54 dBm                                                           | 100 kHz/300KHz |
| 230 MHz to 470 MHz  | -36 dBm                                                           | 100 kHz/300KHz |
| 470 MHz to 862 MHz  | -54 dBm                                                           | 100 kHz/300KHz |
| 862 MHz to 1 GHz    | -36 dBm                                                           | 100 kHz/300KHz |
| 1 GHz to 12,75 GHz  | -30 dBm                                                           | 1 MHz/3MHz     |

### 8.2. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.9.



### 8.3. Test Result

| Test Mode: GFSK CH1:2402MHz  |                         |                 |                |                |            |
|------------------------------|-------------------------|-----------------|----------------|----------------|------------|
| Frequency<br>(MHz)           | Antenna<br>polarization | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Conclusion |
| 428.6                        | H                       | -60.54          | -36            | -24.54         | PASS       |
| 482.22                       | H                       | -60.89          | -54            | -6.89          | PASS       |
| 646.34                       | H                       | -61.25          | -54            | -7.25          | PASS       |
| 4804                         | H                       | -40.33          | -30            | -10.33         | PASS       |
| 56.39                        | V                       | -63.56          | -54            | -9.56          | PASS       |
| 597.22                       | V                       | -61.48          | -54            | -7.48          | PASS       |
| 657.9                        | V                       | -60.79          | -54            | -6.79          | PASS       |
| 4804                         | V                       | -42.82          | -30            | -12.82         | PASS       |
| Test Mode: GFSK CH79:2480MHz |                         |                 |                |                |            |
| 428.6                        | H                       | -54.48          | -36            | -18.48         | PASS       |
| 574.8                        | H                       | -70.22          | -54            | -16.22         | PASS       |
| 731.9                        | H                       | -71.36          | -54            | -17.36         | PASS       |
| 4960                         | H                       | -44.45          | -30            | -14.45         | PASS       |
| 488.7                        | V                       | -71.28          | -54            | -17.28         | PASS       |
| 635.4                        | V                       | -71.47          | -54            | -17.47         | PASS       |
| 4960                         | V                       | -42.54          | -30            | -12.54         | PASS       |

Note: The test result belongs to 30MHz-12.75GHz, the other points are too low against the limit.



| Test Mode: 8-DPSK CH1:2402MHz  |                         |                 |                |                |            |
|--------------------------------|-------------------------|-----------------|----------------|----------------|------------|
| Frequency<br>(MHz)             | Antenna<br>polarization | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Conclusion |
| 428.6                          | H                       | -54.48          | -36            | -18.48         | PASS       |
| 574.8                          | H                       | -70.65          | -54            | -16.65         | PASS       |
| 731.9                          | H                       | -69.47          | -54            | -15.47         | PASS       |
| 4804                           | H                       | -43.59          | -30            | -13.59         | PASS       |
| 488.7                          | V                       | -69.38          | -54            | -15.38         | PASS       |
| 635.4                          | V                       | -70.26          | -54            | -16.26         | PASS       |
| 657.9                          | V                       | -70.75          | -54            | -16.75         | PASS       |
| 4804                           | V                       | -42.63          | -30            | -12.63         | PASS       |
| Test Mode: 8-DPSK CH79:2480MHz |                         |                 |                |                |            |
| 428.6                          | H                       | -55.44          | -36            | -19.44         | PASS       |
| 574.8                          | H                       | -69.62          | -54            | -15.62         | PASS       |
| 731.9                          | H                       | -70.57          | -54            | -16.57         | PASS       |
| 4960                           | H                       | -43.46          | -30            | -13.46         | PASS       |
| 488.7                          | V                       | -70.38          | -54            | -16.38         | PASS       |
| 635.4                          | V                       | -70.75          | -54            | -16.75         | PASS       |
| 821.5                          | V                       | -68.63          | -54            | -14.63         | PASS       |
| 4960                           | V                       | -45.59          | -30            | -15.59         | PASS       |

Note: The test result belongs to 30MHz-12.75GHz, the other points are too low against the limit.



## 9. Receiver Spurious Emissions

### 9.1. Limit

The spurious emissions of the receiver shall not exceed the values given in following table .

| Frequency range    | Maximum power,<br>e.r.p. ( $\leq 1$ GHz)<br>e.i.r.p. ( $> 1$ GHz) | RBW/VBW        |
|--------------------|-------------------------------------------------------------------|----------------|
| 30 MHz to 1GHz     | -57 dBm                                                           | 100 kHz/300KHz |
| 1 GHz to 12,75 GHz | -47 dBm                                                           | 1 MHz/3MHz     |

### 9.2. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.10.

### 9.3. Test Result

| Test Mode: GFSK CH1:2402MHz                                                                                                                                     |                         |                 |                |                |            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------|----------------|----------------|------------|
| Frequency<br>(MHz)                                                                                                                                              | Antenna<br>polarization | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Conclusion |
| 428.6                                                                                                                                                           | H                       | -76.67          | -57            | -19.67         | PASS       |
| 574.8                                                                                                                                                           | H                       | -76.35          | -57            | -19.35         | PASS       |
| 731.9                                                                                                                                                           | H                       | -77.46          | -57            | -20.46         | PASS       |
| 2210                                                                                                                                                            | H                       | -62.52          | -47            | -15.52         | PASS       |
| 488.7                                                                                                                                                           | V                       | -77.71          | -57            | -20.71         | PASS       |
| 635.4                                                                                                                                                           | V                       | -76.53          | -57            | -19.53         | PASS       |
| 657.9                                                                                                                                                           | V                       | -78.64          | -57            | -21.64         | PASS       |
| 2210                                                                                                                                                            | V                       | -64.82          | -47            | -17.82         | PASS       |
| Test Mode: GFSK CH79:2480MHz                                                                                                                                    |                         |                 |                |                |            |
| 428.6                                                                                                                                                           | H                       | -77.71          | -57            | -20.71         | PASS       |
| 574.8                                                                                                                                                           | H                       | -76.48          | -57            | -19.48         | PASS       |
| 731.9                                                                                                                                                           | H                       | -76.26          | -57            | -19.26         | PASS       |
| 2210                                                                                                                                                            | H                       | -60.63          | -47            | -13.63         | PASS       |
| 488.7                                                                                                                                                           | V                       | -76.26          | -57            | -19.26         | PASS       |
| 635.4                                                                                                                                                           | V                       | -77.47          | -57            | -20.47         | PASS       |
| 657.9                                                                                                                                                           | V                       | -76.28          | -57            | -19.28         | PASS       |
| 2210                                                                                                                                                            | V                       | -61.87          | -47            | -15.87         | PASS       |
| Note: All the emissions detected are belong to narrowband emissions. The test result belongs to 30MHz-12.75GHz, the other points are too low against the limit. |                         |                 |                |                |            |



## 10. Receiver Blocking

### 10.1. Limit

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

Table 6 contains the Receiver Blocking parameters for Receiver Category 1 equipment.

**Table 6: Receiver Blocking parameters for Receiver Category 1 equipment**

| Wanted signal mean power from companion device (dBm)                                                                                                                                       | Blocking signal frequency (MHz)                                | Blocking signal power (dBm) (see note 2) | Type of blocking signal |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------|-------------------------|
| $P_{\min} + 6 \text{ dB}$                                                                                                                                                                  | 2 380<br>2 503,5                                               | -53                                      | CW                      |
| $P_{\min} + 6 \text{ dB}$                                                                                                                                                                  | 2 300<br>2 330<br>2 360                                        | -47                                      | CW                      |
| $P_{\min} + 6 \text{ dB}$                                                                                                                                                                  | 2 523,5<br>2 553,5<br>2 583,5<br>2 613,5<br>2 643,5<br>2 673,5 | -47                                      | CW                      |
| NOTE 1: $P_{\min}$ is the minimum level of wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. |                                                                |                                          |                         |
| NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.               |                                                                |                                          |                         |

Table 7 contains the Receiver Blocking parameters for Receiver Category 2 equipment.

**Table 7: Receiver Blocking parameters receiver category 2 equipment**

| Wanted signal mean power from companion device (dBm)                                                                                                                                           | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 2) | Type of blocking signal |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------------|-------------------------|
| $P_{\min} + 6 \text{ dB}$                                                                                                                                                                      | 2 380<br>2 503,5                | -57                                      | CW                      |
| $P_{\min} + 6 \text{ dB}$                                                                                                                                                                      | 2 300<br>2 583,5                | -47                                      | CW                      |
| NOTE 1: $P_{\min}$ is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. |                                 |                                          |                         |
| NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.                   |                                 |                                          |                         |

Table 8 contains the Receiver Blocking parameters for Receiver Category 3 equipment.


Table 8: Receiver Blocking parameters receiver category 3 equipment

| Wanted signal mean power from companion device (dBm) | Blocking signal frequency (MHz) | Blocking signal power (dBm) (see note 2) | Type of blocking signal |
|------------------------------------------------------|---------------------------------|------------------------------------------|-------------------------|
| $P_{\min} + 12 \text{ dB}$                           | 2 380<br>2 503,5                | -57                                      | CW                      |
| $P_{\min} + 12 \text{ dB}$                           | 2 300<br>2 583,5                | -47                                      | CW                      |

NOTE 1:  $P_{\min}$  is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

## 10.2. Test Setup

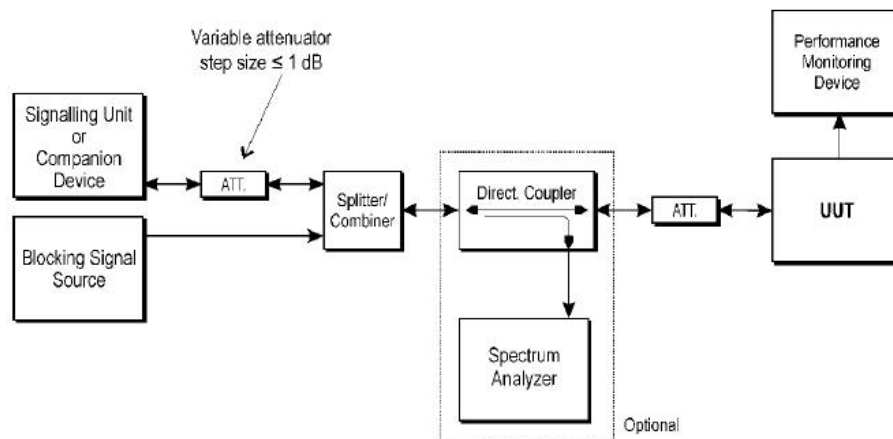

## 10.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.11.

## 10.4. Test Result

| E.R.P. (dBm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Variable attenuator vaule (dB) | Pmin (dBm) | Blocking signal frequency (MHz) | Blocking signal power (dBm) | PER  | PER limit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------|---------------------------------|-----------------------------|------|-----------|
| 1.32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 59                             | -57.68     | 2380                            | -57                         | 2.3% | ≤10%      |
| Test result: conform                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                |            |                                 |                             |      |           |
| <p>Note: 1. The equipment belongs to receiver category 2 and it shall be tested operating at hopping mode. The worst result is recorded.</p> <p>2. <math>P_{\min} = \text{E.R.P.} - \text{Variable attenuator vaule}</math>.<br/>ERP is min conducted power vaule.</p> <p>3. When required blocking signals injected, communication link between the UUT and the associated companion device remains, and the performance still meet the minimum performance criterion <math>\text{PER} \leq 10\%</math>.</p> |                                |            |                                 |                             |      |           |



## 11. Geo-location Capability

### 11.1. Definition

Geo-location capability is a feature of the equipment to determine its geographical location with the purpose to configure itself according to the regulatory requirements applicable at the geographical location where it operates.

The geo-location capability may be present in the equipment or in an external device (temporary) associated with the equipment operating at the same geographical location during the initial power up of the equipment. The geographical location may also be available in equipment already installed and operating at the same geographical location.

### 11.2. Requirements


The geographical location determined by the equipment shall not be accessible to the user.


### 11.3. Test Result

Not apply.



This requirement only applies to equipment with geo-location capability. And this product does not have the Geo-location capability, thus, not apply to this product.


## 12. Photos of Test Setup

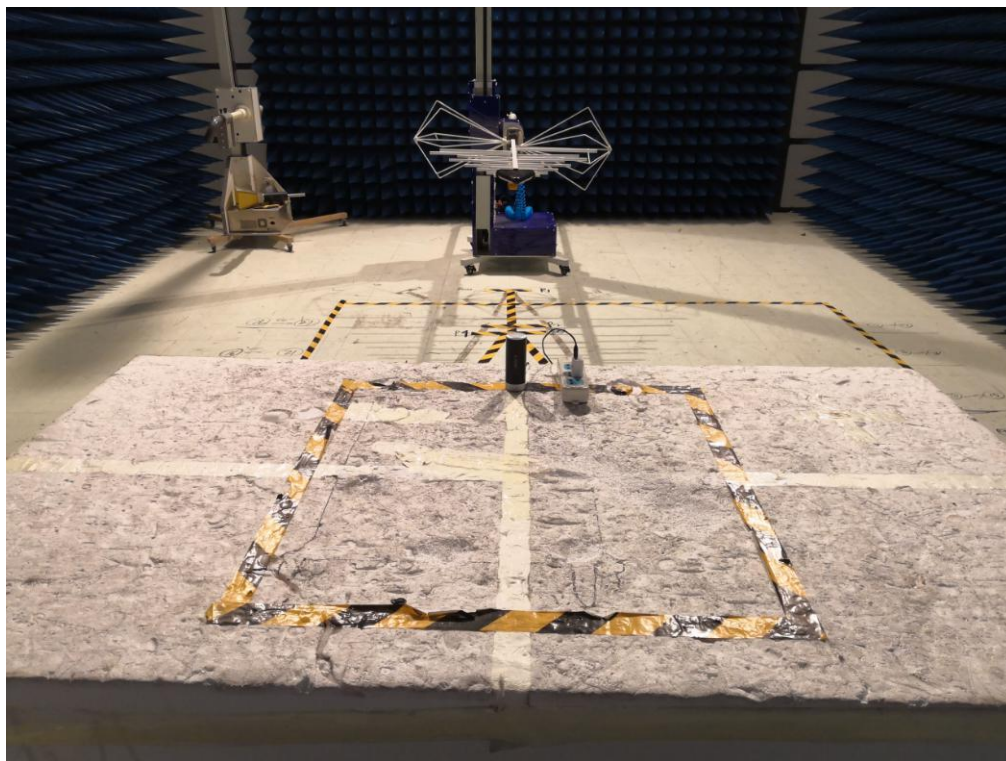

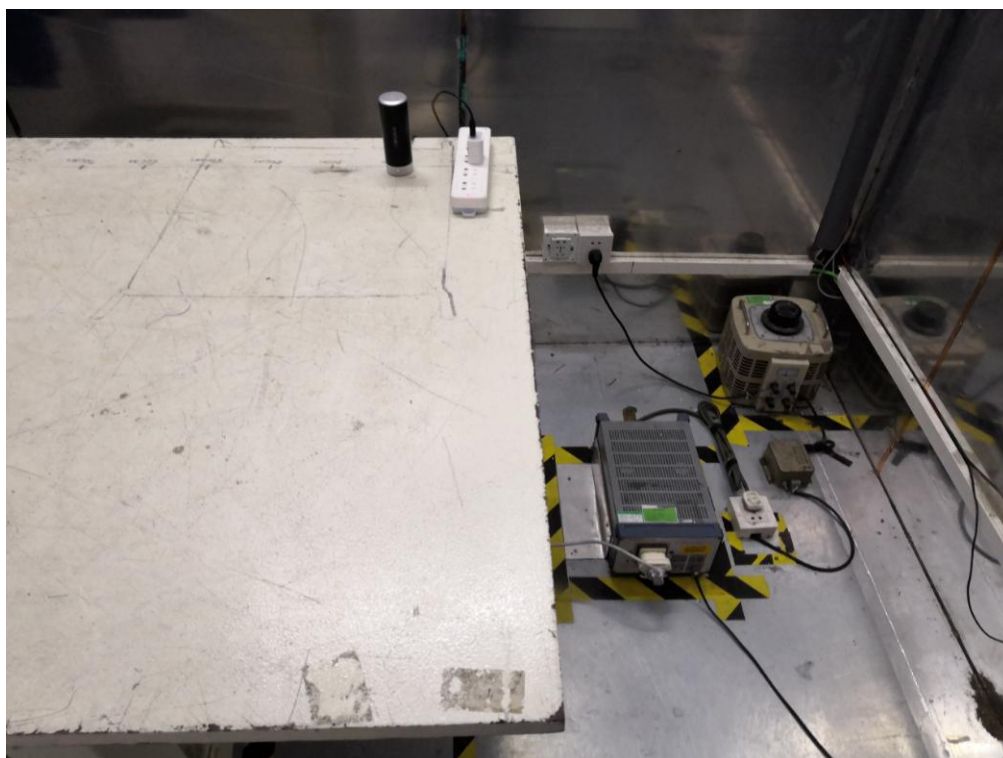

### 13. Photos of EUT

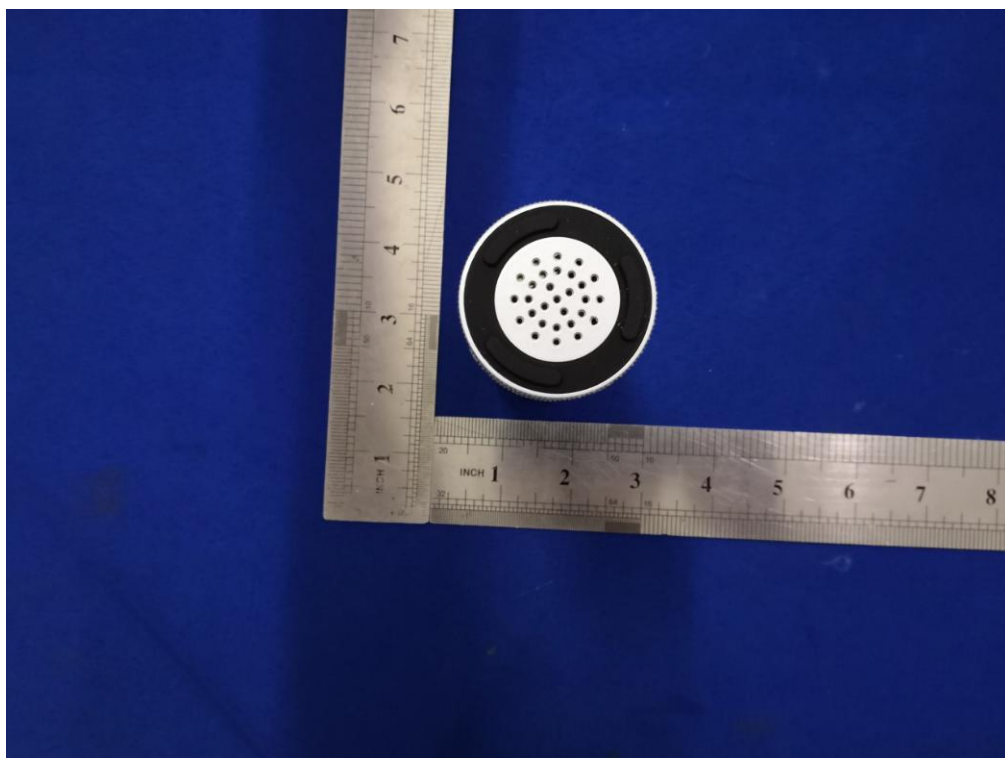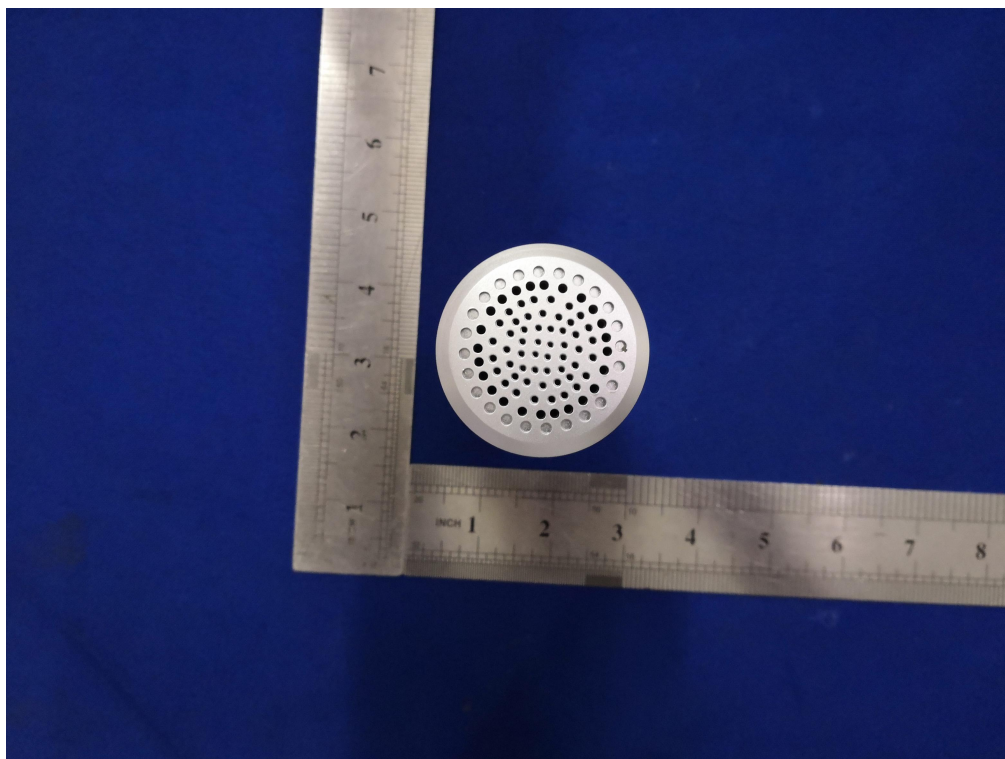

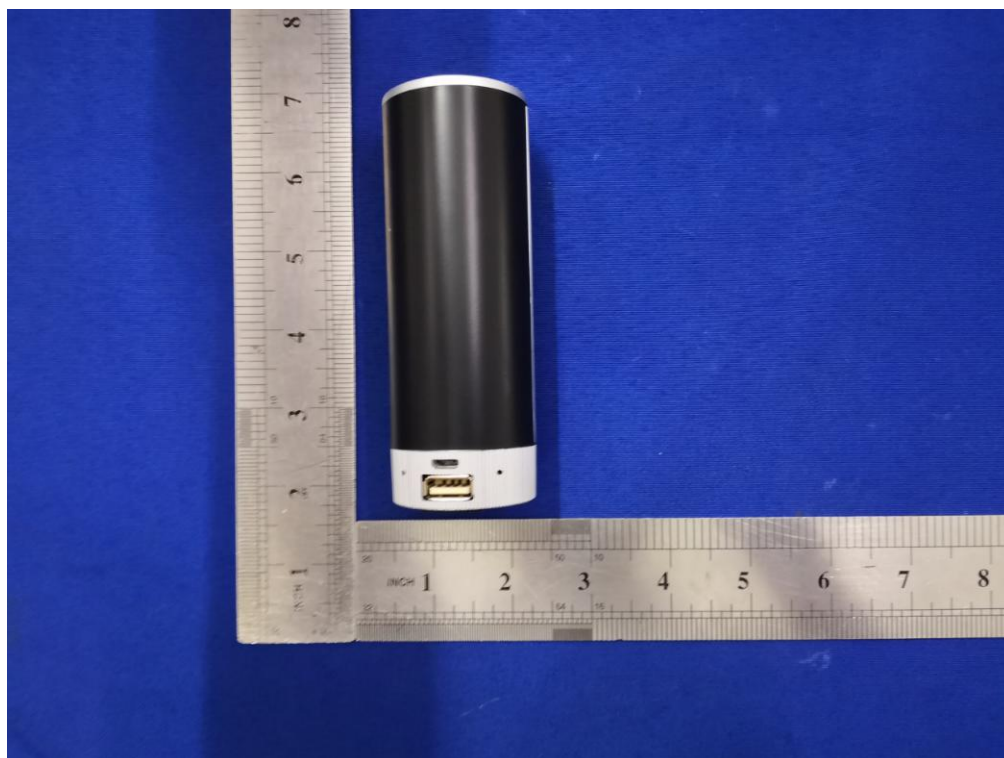

-----THE END OF REPORT-----