

# TECHNICAL REPORT

Report No.: EMC 1907088-02

File reference No.: 2019-07-26

Applicant:

Product: Wireless charger

Model No.:

Trademark: N/A

Test Standards: ETSI EN 303 417 v1.1.1 (2017-09)

Test result:

The RF testing has been performed on the submitted samples and found in compliance with council RE Directive 2014/53/EU

Approved By

*Jack Chung*

Jack Chung

EMC Manager

Dated: July 26, 2019

**Results appearing herein relate only to the sample tested**

**The technical reports is issued errors and omissions exempt and is subject to withdrawal at**

**SHENZHEN TIMEWAY TESTING LABORATORIES.**

**Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong China**

**Tel (+86 755)8344 8688 Fax (+86 755)8344 2996 Email: info@timeway-lab.com**

	Test Report Conclusion	
	Content	
<b>1.0</b>	<b>General Details</b> .....	3
1.1	Notes.....	3
1.2	Test Laboratory.....	3
1.3	Details of Applicant.....	3
1.4	Application Details.....	3
1.5	Test Item.....	3
1.6	Test Standards.....	4
1.7	Configuration of The EUT.....	4
1.8	EUT Modification.....	4
1.9	Test By.....	4
<b>2.0</b>	<b>Technical Test</b> .....	5
2.1	Summary of Test Result.....	5
2.2	Test Report.....	5
	Clause4.3 Transmitter Conformance Requirements.....	6
	Clause4.3.2 Operating frequency ranges.....	6
	Clause4.3.3 Modulation bandwidth.....	7
	Clause4.3.4 Transmitter H-field requirements.....	9
	Clause4.3.5 Transmitter radiated spurious domain emission limits < 30 MHz.....	10
	Clause4.3.6 Transmitter radiated spurious domain emission limits > 30 MHz.....	13
	Clause4.4 Receiver Conformance requirements.....	15
	Clause4.4.2 Receiver spurious emissions.....	15
<b>3.0</b>	<b>Product Labelling</b> .....	17
<b>4.0</b>	<b>Photographs - EUT</b> .....	18
<b>5.0</b>	<b>Test Equipments</b> .....	18

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it , or a certified copy there of prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## 1. General Information

### 1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The TIMEWAY Lab does not assume Responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the TIMEWAY Lab.

### 1.2 Testing Laboratory

#### Shenzhen Timeway Testing Laboratories

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel: +86 755 83448688 Fax :+86 755 83442996

Internet: [www.timeway-lab.com](http://www.timeway-lab.com)

### 1.3 Details of Applicant

Name: Digiview Technology Limited

Address: West of 2/F Building B1, GaoXinJian Industrial Park, FuYuan 1st Road, HePing Vallage, FuYongTown, BaoAn District, ShenZhen, GuangDong, China

### 1.4 Application Details

Date of Receipt of Application: July 15, 2019

Date of Receipt of Test Item: July 15, 2019

Date of Test: July 15, 2019~ July 26, 2019

### 1.5 Test Item

Manufacturer: Digiview Technology Limited

Address: West of 2/F Building B1, GaoXinJian Industrial Park, FuYuan 1st Road, HePing Vallage, FuYongTown, BaoAn District, ShenZhen, GuangDong, China

Brand Name: N/A

Model No.: W21

Additional Model: N/A

Description: Wireless charger

#### Additional Information

Frequency: 111.5-205 kHz

Modulation Type: MSK

Power Supply: DC5V from a power supply

Operation Distance: N/A

Extreme Temp. Tolerance: -20°C to 55°C

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## 1.6 Test Standards

### ETSI EN 303 417 v 1.1.1 (2017-09)

Wireless power transmission systems, using technologies other than radio frequency beam in the 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz ranges;  
Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

## 1.7 Configuration of the EUT

The EUT was configured according to **CISPR16**. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model
Wireless charger	Digiview Technology Limited	W21

### B. Internal Devices

Device	Manufacturer	Model
N/A		

### C. Peripherals

Device	Manufacturer	Model	Cable
N/A			

## 1.8 EUT Modifications

No modification by Shenzhen Timeway Testing Laboratories

## 1.9 Tests or Witness Test Engineering

Test By:

Printing Name: Terry Tang



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## 2. Technical Test

### 2.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "Passed" if all Measurements are "Passed")	<b>Pass</b>

### 2.2 Test Report

#### Test Report Reference

List of Measurements		
Parameter to be measured	Clause	Result
<b>Transmitter Parameters</b>		
Permitted range of operating frequencies	Clause4.3.2	Pass
Operating frequency ranges	Clause4.3.3	Pass
H-field requirements	Clause4.3.4	Pass
Transmitter spurious emissions	Clause4.3.5	Pass
Transmitter out of band (OOB) emissions	Clause4.3.6	Pass
WPT system unwanted conducted emissions	Clause4.3.7	N/A
<b>Receiver Parameters</b>		
Receiver Blocking	Clause4.4.2	Pass

Note: The clause numbers are referenced to ETSI EN 303 417 v 1.1.1 (2017-09).

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## Clause 4.3 Transmitter Conformance Requirements For Transmitter

### Clause 4.3.2 Permitted range of operating frequencies For Transmitter

The permitted range of operating frequencies denotes the frequency ranges set out in Table 1. It likewise denotes the respective frequency range for accommodation of the fundamental WPT frequency of the EUT within its operating frequency range (OFR).

The measuring receiver may be a spectrum analyser, oscilloscope, selective power meter or any measuring receiver which is appropriate to perform the intended measurement of the EUT.

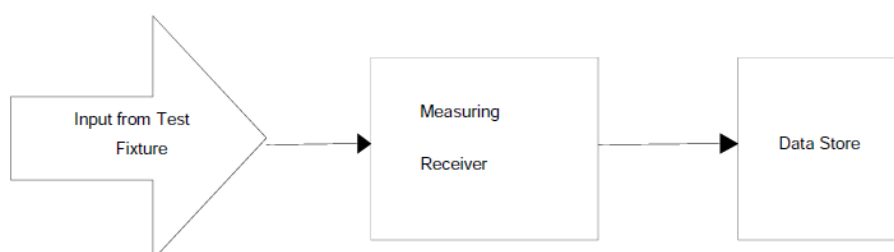


Figure 1: Test set-up for measurement of the operating frequencies

EUT	Wireless charger	Model	W21
Mode	Normal operation	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 4.3.2	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH

Result: the operation frequency range is 111.5-205 kHz. It is fall in the frequency range of 100-300 kHz.

### Limits: EN 303 417, subclause 4.3.2.3

The permitted range of operating frequency range(s) for intentional emissions shall be within 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz, see Table 2.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

### Clause 4.3.3 operating frequency range(s) (OFR)

#### For Transmitter

The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).

The operating frequency range(s) of the WPT system are determined by the lowest ( $f_L$ ) and highest frequency ( $f_H$ ) as occupied by the power envelope.

The WPT system could have more than one operating frequency range.

For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.

For multi-frequency systems the OFR is described in Figures 2 and 3.

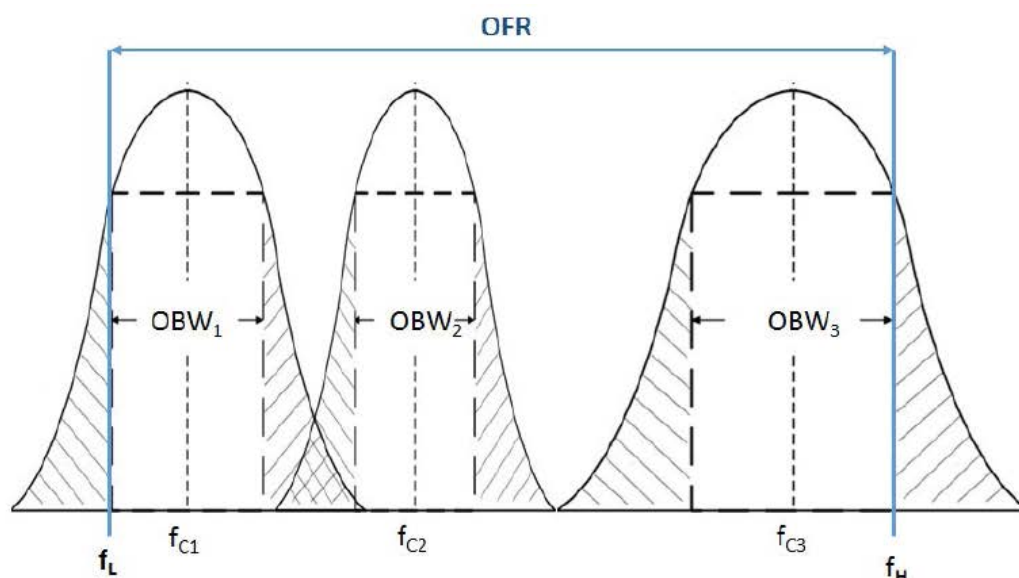


Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



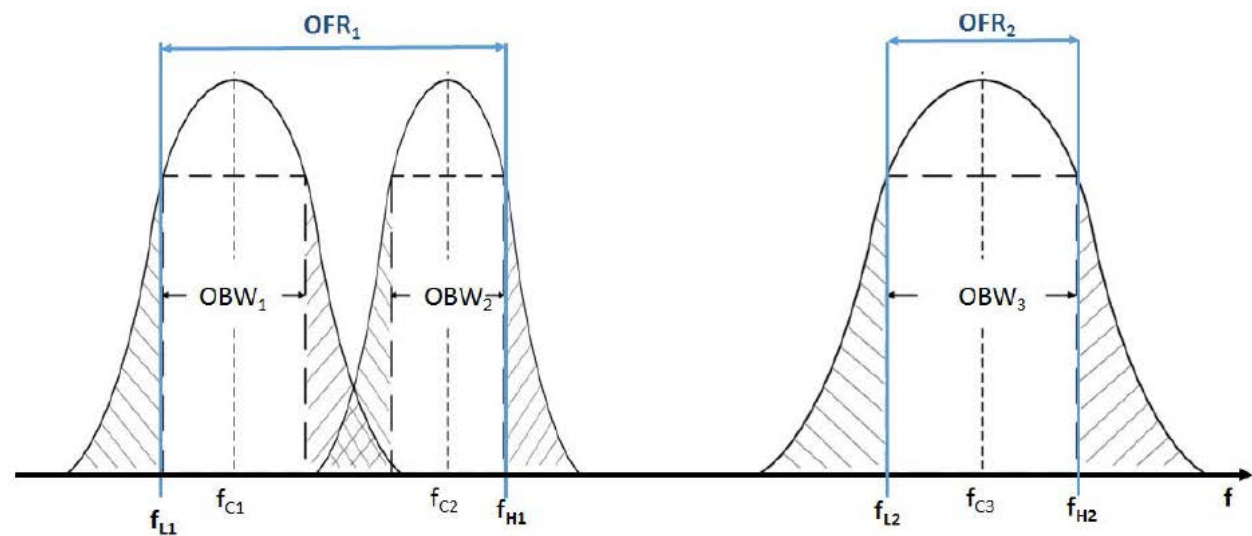


Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time

EUT	Wireless charger	Model	W21
Mode	Normal operation	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 4.3.3	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH

Test Data:

$F_L$ (kHz)	$F_H$ (kHz)	Limit	Result
111.12	205.28	$F_L \geq 100\text{kHz}; F_H \leq 300\text{kHz}$	Pass

Limits: EN 303 417-1, subclause 4.3.3.3

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.

The report refers only to the sample tested and does not apply to the bulk.  
This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.  
In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



### Clause 4.3.4 Transmitter H-field requirements For Transmitter

The radiated H-field is defined in the direction of maximum field strength under specified conditions of measurement.

EUT	Wireless charger	Model	W21
Mode	Normal operation	Input Power	DC5.0V
Subclause	EN303 417 Clause 4.3.4	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH
Result	30.2dBμA/m at 10 m		

Frequency (kHz)	Value (dBuA/m@3m)	Value (dBuA/m@10m)	Limit (dBuA/m@10m)	Result
175	21.78	-9.62	-5.00	Pass

#### Remark:

The H-field limit in dBμA/m at 3 m,  $H_{3m}$ , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 \quad (H.2)$$

where:

$H_{10m}$  is the H-field limit in dBμA/m at 10 m distance according to the present document; and

$C_3$  is a conversion factor in dB determined from figure H.2.

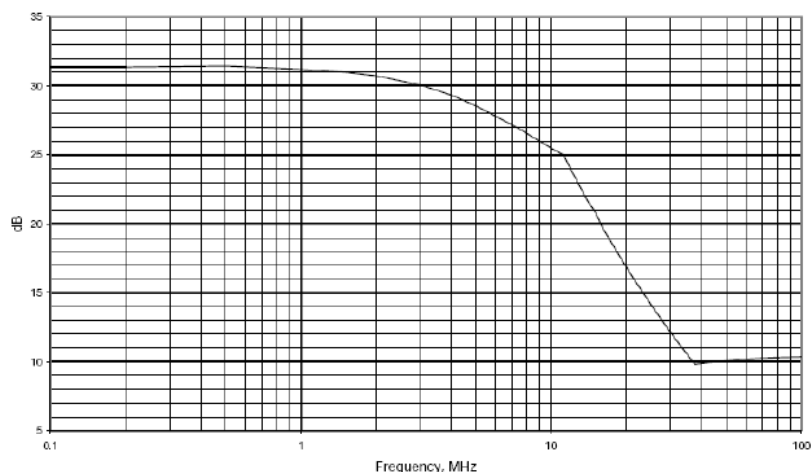


Figure H.2: Conversion factor  $C_3$  versus frequency

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

### Limits: EN 303 417-1, subclause 4.3.4.3

The H-field limits are provided in Table 3.

They have been specified for control of any radiated emissions within the OFR originating from the WPT system (power transmission and accompanying data communication).

The H-field limits in Table 3 are EU wide harmonised according to EC Decision 2013/752/EU [i.2]. Further information is available in CEPT/ERC/REC 70-03 [i.1].

**Table 3: H-field limits**

Frequency range [MHz]	H-field strength limit [dB $\mu$ A/m at 10 m]	Comments
$0,019 \leq f < 0,021$	72	
$0,059 \leq f < 0,061$	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
$0,079 \leq f < 0,090$	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
$0,100 \leq f < 0,119$	42	
$0,119 \leq f < 0,135$	66 descending 10 dB/dec above 0,119 MHz	See note 1
$0,135 \leq f < 0,140$	42	
$0,140 \leq f < 0,1485$	37,7	
$0,1485 \leq f < 0,30$	-5	
$6,765 \leq f < 6,795$	42	
NOTE 1: Limit is 42 dB $\mu$ A/m for the following spot frequencies: 60 kHz $\pm$ 250 Hz and 129,1 kHz $\pm$ 500 Hz.		
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.		


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

### Clause 4.3.5 Transmitter spurious emissions For Transmitter

The transmitter spurious emissions for a single frequency system are to be considered in frequency ranges defined in Figure 4 ( $f < f_{SL}$  and  $f > f_{SH}$ ).

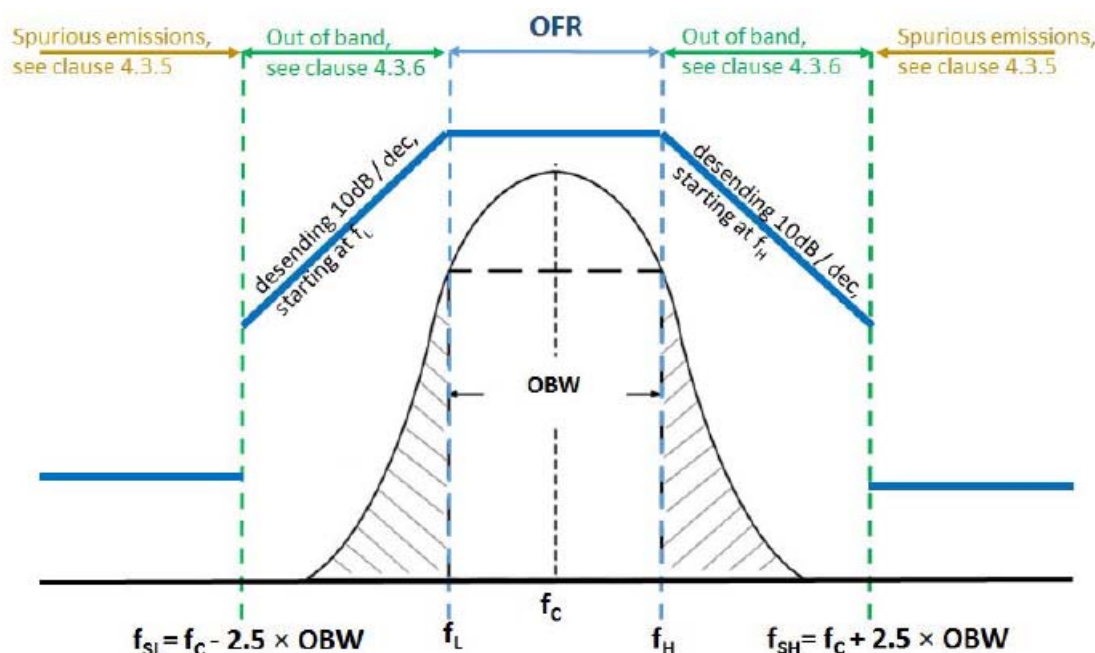

**Figure 4: Out of band and spurious domain of a single frequency WPT system**

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ( $f < f_{SL}$  and  $f > f_{SH}$ ).

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

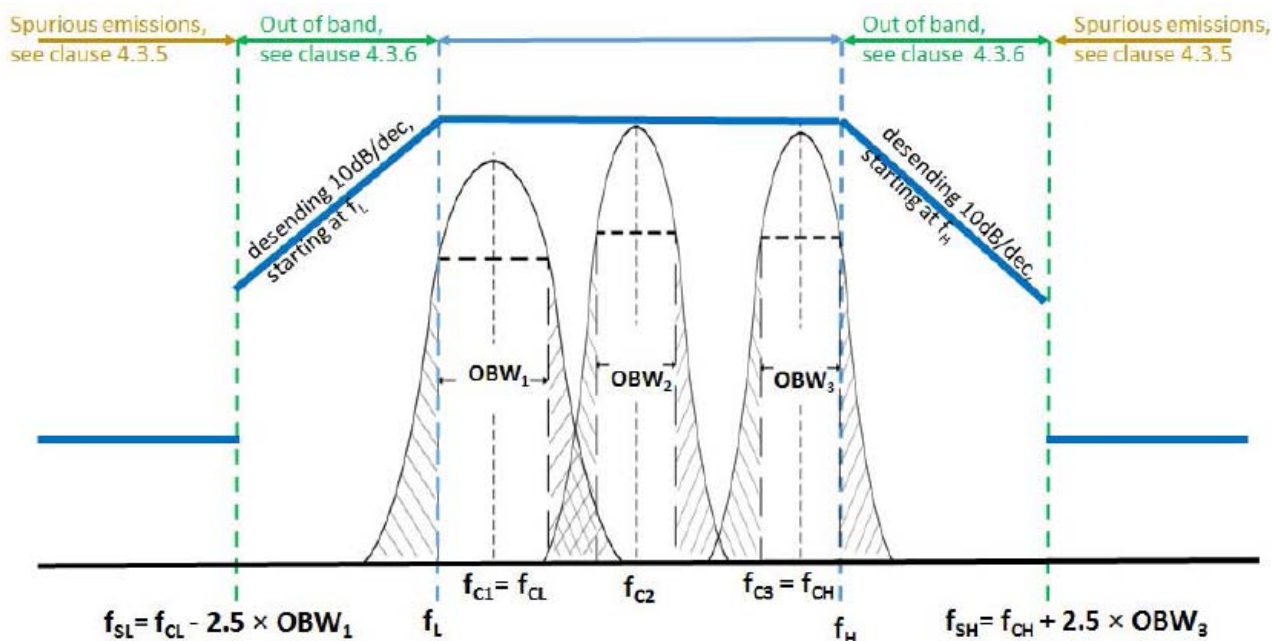


Figure 5: Out of band and spurious domain of a multi - frequency system  
(during one WPT system cycle time)

EUT	Wireless charger	Model	W21
Mode	Operation and Standby	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 4.3.5	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH

#### Operation Mode:

Frequency (MHz)	Polarity	Level (dBm)	Limit (dBm)	Result
192.92	Horizontal	-60.28	-54.00	Pass
97.64	Horizontal	-62.25	-54.00	Pass
49.64	Vertical	-57.06	-54.00	Pass
58.61	Vertical	-62.53	-54.00	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-07-26

**Standby Mode:**

Frequency (MHz)	Polarity	Level (dBm)	Limit (dBm)	Result
NF	Horizontal	--	-57.00	Pass
NF	Vertical	--	-57.00	Pass

Note: NF=No significant peak noise was found

**Limits: EN 303 417, subclause 4.3.5.3**

The radiated field strength of spurious emissions below 30 MHz shall not exceed the generated H-field given in Table 4.

**Table 4**

State (see note)	Frequency $9 \text{ kHz} \leq f < 10 \text{ MHz}$	Frequency $10 \text{ MHz} \leq f < 30 \text{ MHz}$
Operating	27 dB $\mu$ A/m at 9 kHz descending 10 dB/dec	-3,5 dB $\mu$ A/m
Standby	5,5 dB $\mu$ A/m at 9 kHz descending 10 dB/dec	-25 dB $\mu$ A/m
NOTE: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

The power of any radiated spurious emission between 30 MHz and 1 GHz shall not exceed the values given in Table 5.

**Table 5**

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

#### Clause 4.3.6 Transmitter out of band (OOB) emissions For Transmitter

The WPT system out of band emissions are to be considered in frequency ranges defined in Figure 4 and Figure 5 (between  $f_{SL}$  and  $f_L$  and between  $f_H$  and  $f_{SH}$ ).

EUT	Wireless charger	Model	W21
Mode	Operation and Standby	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 4.3.6	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH
Test Result	Pass		

Frequency (kHz)	Value (dBuA/m@3m)	Value (dBuA/m@10m)	Limit (dBuA/m@10m)	Result
104.36	7.82	-23.58	-15.00	Pass
121.12	8.08	-23.32		

#### Limits: EN 303 417, subclause 4.3.6.3

The OOB limits are visualized in Figures 4 and 5; they are descending from the intentional limits from Table 3 at  $f_H/f_L$  with 10 dB/decade.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

#### Clause 4.3.7 WPT system unwanted conducted emissions For Transmitter

This applies to all WPT systems where the cable to the primary coil exceeds a length of 3 m and where the cable is not installed in the ground or any metallic structures.

WPT system unwanted conducted emissions are based on the emissions of the unwanted common mode current on the cable between the off board power supply and the primary coil seen as a monopole radiator driven against the power supply.

EUT	Wireless charger	Model	W21
Mode	Operation and Standby	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 4.3.7	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH
Test Result	N/A		

**Note: the cable to the primary coil not exceeds a length of 3 m. This test item not applicable.**

#### Limits: EN 303 417, subclause 4.3.7.3

The common mode current (ICM) between 1 MHz and 30 MHz shall not exceed the following limit:

$$I_{CM} = 47 - 8 \times \log(f) \text{ dB}\mu\text{A}$$

NOTE: f is the frequency in MHz.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



## Clause4.4 Receiver Conformance requirements

### Clause4.4.2 Receiver blocking

#### For receiver

This requirement applies to all WPT systems operation in Mode 1, Mode 2 and Mode 3.

Blocking is a measure of the capability of the receiver to receive a wanted signal without exceeding a given degradation due to the presence of an unwanted input signal at any frequencies other than those of the receiver spurious responses.

The test shall be performed in the relevant operational modes (see clause 4.2.3).

The wanted performance criteria from clause 4.2.2 shall be used as criterion for the receiver blocking tests.

EUT	Wireless charger	Model	W21
Mode	Normal operation	Input Voltage	DC5.0V
Subclause	EN303 417 Clause 6.3.1	Test Equipments	Refer to Section 6
Temperature	24 deg. C,	Humidity	56% RH
Test Result	N/A		

#### Limits: EN 303 417-1, subclause 4.4.2.3

The receiver blocking limits in Table 6 shall be fulfilled.

Table 6: Receiver blocking limits

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency ( $f_c$ ) of the WPT system (see clause 4.3.3)	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
Signal level field strength at the EUT	72 dBμA/m	72 dBμA/m	82 dBμA/m
NOTE: F = OFR see clause 4.3.3.			

The EUT shall achieve the wanted performance criterion, see clause 4.2.2, in the presence of the blocking signal.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

### 3.0 Product Labelling

#### CE Mark label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.



Mark Location: Rear enclosure

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

#### 4.0 Photographs - EUT

Please see test report EMC1907088-01

#### 5.0 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2018-09-02	2019-09-01
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2018-09-02	2019-09-01
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2018-09-02	2019-09-01
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2018-09-02	2019-09-01
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2018-09-02	2019-09-01
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2018-09-02	2019-09-01
System Controller	CT	SC100	-	2018-08-22	2019-08-21
Oscillator	KENWOOD	AG-203D	3070002	2018-08-22	2019-08-21
Spectrum Analyzer	HAMEG	HM5012	-	2018-08-22	2019-08-21
Power Supply	LW	APS1502	-	2018-08-22	2019-08-21
5K VA AC Power Source	California Instruments	5001iX	56060	2018-09-02	2019-09-01
CDN	EM TEST	CDN M2/M3	-	2018-09-02	2019-09-01
Attenuation	EM TEST	ATT6/75	-	2018-09-02	2019-09-01
Resistance	EM TEST	R100	-	2018-09-02	2019-09-01
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2018-09-02	2019-09-01
Inductive Components	EM TEST	MC2630	-	2018-09-02	2019-09-01
Antenna	EM TEST	MS100	-	2018-09-02	2019-09-01
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2018-08-23	2019-08-22
Power Amplifier	AR	150W1000	300999	2018-08-23	2019-08-22
Field probe	Holaday	HI-6005	105152	2018-08-23	2019-08-22
Bilog Antenna	Chase	CBL6111C	2576	2018-08-23	2019-08-22
Loop Antenna	EMCO	6502	00042960	2018-08-23	2019-08-22
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2018-08-22	2019-08-21

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

3m OATS	--	--	N/A	2018-08-24	2019-08-23
Vector Signal Generator	AGILENT	E4438C	MY49070163	2019.01.20	2020.01.19
Splitter	Mini-Circuits	ZAP-50W	NN256400424	2019.01.20	2020.01.19
Directional Coupler	AGILENT	87300C	MY44300299	2019.01.20	2020.01.19
vector Signal Generator	AGILENT	E4438C	US44271917	2019.01.20	2020.01.19
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	AGILENT	U2531A	TW54063507	2019.01.20	2020.01.19
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	AGILENT	U2531A	TW54063513	2019.01.20	2020.01.19
Splitter	Mini	PS3-7	4463	2019.01.20	2020.01.19
Spectrum Analyzer	AGILENT	E7405A	US44210471	2019.01.20	2020.01.19
Attenuator	Resnet	20dB	(n.a)	2019.01.20	2020.01.19
Signal Analyzer	AGILENT	N9010A	MY48030494	2019.01.20	2020.01.19
Horn Antenna	ROHDE&SCHWARZ	BBHA 9120D	9120D-631	2018-08-24	2019-08-23

## End of the Report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Testing Laboratories. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen Timeway Testing Laboratories to his customer. Supplier or other persons directly concerned. Shenzhen Timeway Testing Laboratories will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, Shenzhen Timeway Testing Laboratories reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.