

# RED-EMC Test Report

For

Shenzhen PuSou Electronic Manufactory

Wireless charger

Model No.: PWC12

Prepared For :

Address :

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited

Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei  
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,  
China.518102

Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW181121001-01E

Date of Receipt : Nov. 21, 2018

Date of Test : Nov. 21~Dec. 07, 2018

Date of Report : Dec. 07, 2018

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Test Equipment List.....	6
1.6. Description of Test Facility.....	7
2. Summary of Test Results.....	8
3. Emission Test.....	9
3.1. Conducted Emission Test at Main Ports.....	9
3.1.1. Test Standard and Limit.....	9
3.1.2. Test Setup.....	9
3.1.3. Test Procedure.....	10
3.1.4. Test Data.....	10
3.2. Radiated Emission Test.....	15
3.2.1. Test Standard and Limit.....	15
3.2.2. Test Setup.....	16
3.2.3. Test Procedure.....	16
3.2.4. Test Data.....	17
4. Immunity Test.....	22
4.1. Electrostatic Discharge Test.....	23
4.1.1. Test Standard and Specification.....	23
4.1.2. Test Setup.....	23
4.1.3. Test Procedure.....	24
4.1.4. Test Data.....	24
4.2. Radiated, RF Electromagnetic Fields Test.....	25
4.2.1. Test Standard and Specification.....	25
4.2.2. Test Setup.....	25
4.2.3. Test Procedure.....	25
4.2.4. Test Data.....	26
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	27
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	29
APPENDIX III -- INTERNAL PHOTOGRAPH.....	32

# TEST REPORT

Applicant :  
Manufacturer :  
Product Name : Wireless charger  
Model No. :  
Trade Mark : N.A.  
Rating(s) : Input: DC 5V, 1.5A  
Output: 5W

Test Standard(s) : ETSI EN 301 489-1 V2.2.0 (2017-03)  
ETSI EN 301 489-3 V2.1.1 (2017-03)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 301 489-1, EN 301 489-3 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Nov. 21~Dec. 07, 2018

Prepared By



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)



## 1. General Information

### 1.1. Client Information

Applicant	:	
Address	:	
Manufacturer	:	
Address	:	
Factory	:	
Address	:	

### 1.2. Description of Device (EUT)

Product Name	:	Wireless charger	
Model No.	:		
Trade Mark	:	N.A.	
Test Power Supply	:	AC 230V, 50Hz for adapter/ AC 110V, 50Hz for adapter	
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
Product Description	:	Operation Frequency:	111-205KHz
		Modulation Type:	MSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Samsung M/N: ETA-U90CBC S/N: RT6FB17ZS/B-E Input: 100-240V~ 50-60Hz, 0.35A Output: DC 5V, 2A
Mobile Phone	:	Samsung

#### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mod e(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charge Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charge Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charge Mode

## 1.5. Test Equipment List

### Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 26, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

### Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A
5.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 20, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
7.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year

### Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3Ctest	ESD-30T	ES0131505	Nov. 05, 2018	1 Year

### R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
2	Amplifier	Amplifier Research	150W1000M3	309410	N/A	N/A
3	Amplifier	Amplifier Research	60S1G3	309433	N/A	N/A
4	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	Aug. 17, 2018	3 Year
5	Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	3 Year
6	Power Sensor	Agilent	E9301A	MY41498906	Nov. 05, 2018	1 Year
7	Power Sensor	Agilent	E9301A	MY41498088	Nov. 05, 2018	1 Year
8	Power Meter	Agilent	E4419B	GB40202909	Nov. 05, 2018	1 Year
9	Field Probe	ETS-Lindgren	HI-6006	00212747	Apr. 20, 2017	3 Year
10	software	EMtrace	EM 3	N/A	N/A	N/A



## 1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results

EMC Emission				
Test Items	Standard	Basic Standard	Limit	Results
Conducted Emission	ETSI EN 301 489-1 V2.2.0 Clause 8.3 & 8.4	EN 55032: 2015	Class B	PASS
Radiated Emission	ETSI EN 301 489-1 V2.2.0 Clause 8.2	EN 55032: 2015	Class B	PASS
Harmonic Current Emission	ETSI EN 301 489-1 V2.2.0 Clause 8.5	EN 61000-3-2: 2014	Class A	N/A
Voltage Fluctuations& Flicker	ETSI EN 301 489-1 V2.2.0 Clause 8.6	EN 61000-3-3: 2013	/	N/A
EMC Immunity				
Test Items	Standard	Basic Standard	Performance Criteria	Results
Electrostatic Discharge	ETSI EN 301 489-1 V2.2.0 Clause 9.3	EN 61000-4-2: 2009	B	PASS
RF Electromagnetic Field	ETSI EN 301 489-1 V2.2.0 Clause 9.2	EN 61000-4-3: 2006 +A1: 2008+A2: 2010	A	PASS
Fast transients, common mode	ETSI EN 301 489-1 V2.2.0 Clause 9.4	EN 61000-4-4: 2012	B	N/A
Surges	ETSI EN 301 489-1 V2.2.0 Clause 9.8	EN 61000-4-5: 2014+A1: 2017	B	N/A
Radio frequency, common mode	ETSI EN 301 489-1 V2.2.0 Clause 9.5	EN 61000-4-6: 2014	A	N/A
Volt. Interruptions Volt. Dips	ETSI EN 301 489-1 V2.2.0 Clause 9.7	EN 61000-4-11: 2004	B / C / C NOTE (3)	N/A
NOTE:				
	(1) "N/A" denotes test is not applicable in this Test Report			
	(2) Alternatively, for equipment intended to be used exclusively in an industrial environment or a telecommunication centre, the class A limits may be used.			
	(3) Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 70% reduction – Performance Criteria C			
	Voltage Interruption: 0% Interruption – Performance Criteria C			



### 3. Emission Test

### 3.1. Conducted Emission Test at Main Ports

### 3.1.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.2.0 Clause 8.3 & 8.4
Basic Standard	EN 55032: 2015

## Limits for conducted emissions


Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** \*Decreasing linearly with logarithm of the frequency.

Limits for conducted emissions of equipment  
intended to be used in telecommunication centres and industrial environment

Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	79	66
	500kHz~30MHz	73	60

### 3.1.2. Test Setup

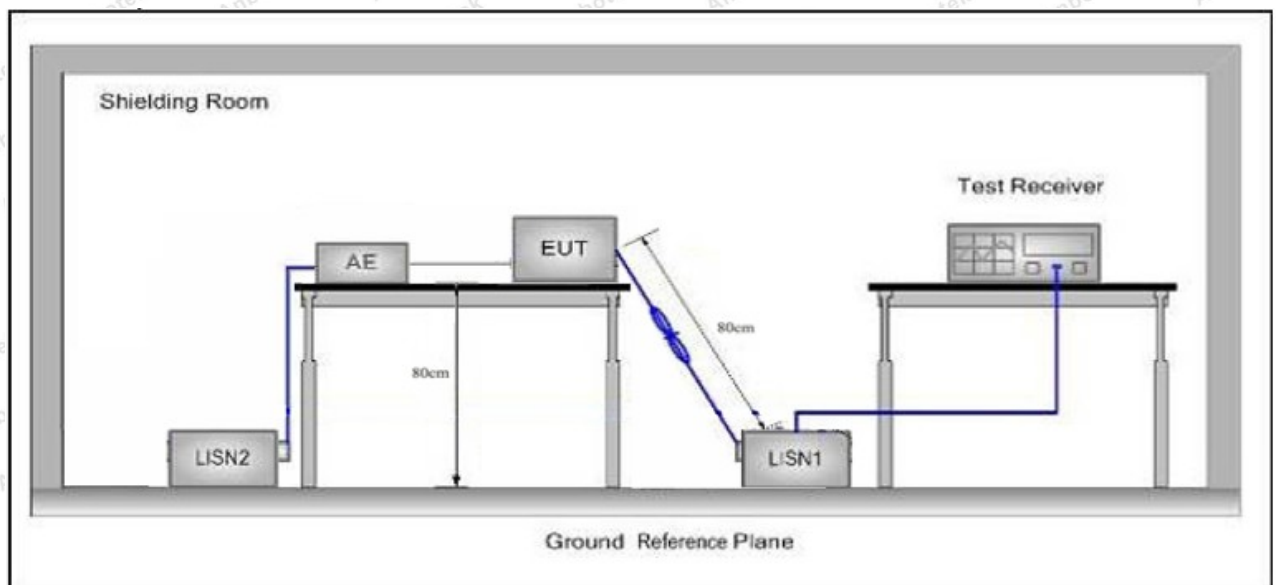

### 3.1.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ETSI EN 301 489-1 V2.2.0 & EN 55032: 2015 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

For the actual test configuration, please refer to the related Item EUT Test Photos.

### 3.1.4. Test Data


PASS

The EUT should be compliance to the limit of Class B

Only the worst case data was showed in the report, please to see the following pages

## Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Mode 1  
Test Specification: AC 230V, 50Hz for adapter  
Comment: Live Line  
Tem.: 22.3°C Hum.: 51%

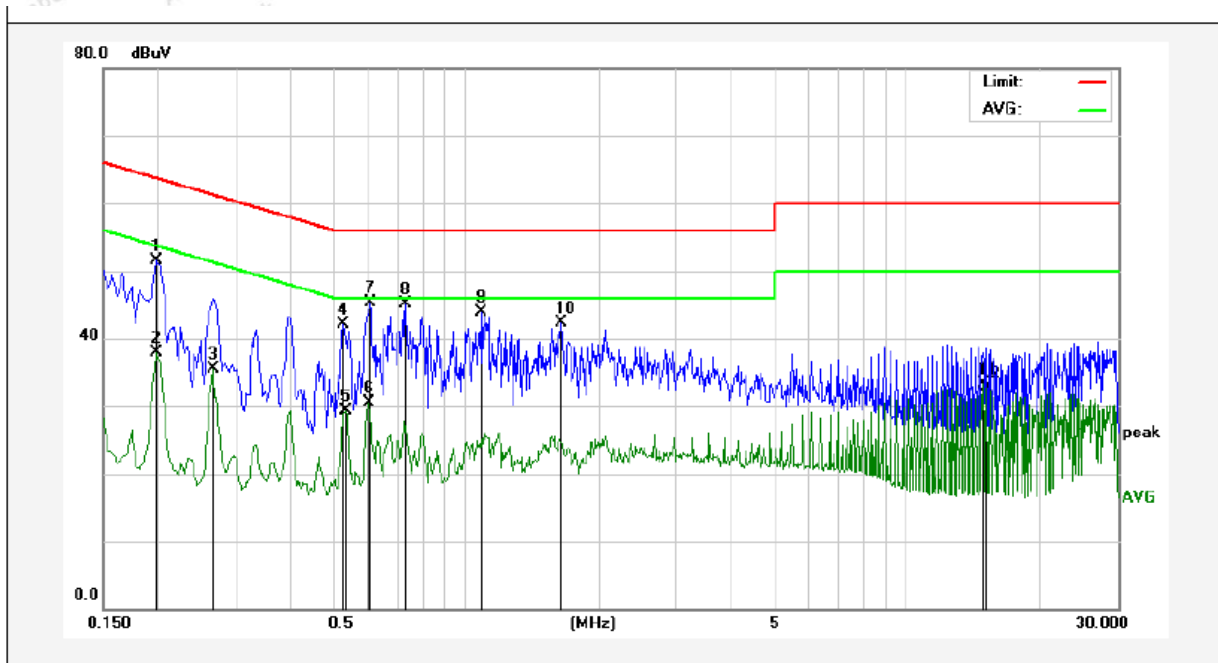


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1980	31.56	19.90	51.46	63.69	-12.23	QP	
2	0.1980	18.05	19.90	37.95	53.69	-15.74	AVG	
3	0.2660	15.59	19.89	35.48	51.24	-15.76	AVG	
4	0.5260	22.04	19.99	42.03	56.00	-13.97	QP	
5	0.5340	9.32	19.99	29.31	46.00	-16.69	AVG	
6	0.6020	10.51	20.01	30.52	46.00	-15.48	AVG	
7	0.6060	25.27	20.01	45.28	56.00	-10.72	QP	
8	0.7300	25.10	20.05	45.15	56.00	-10.85	QP	
9	1.0780	23.74	20.12	43.86	56.00	-12.14	QP	
10	1.6420	22.09	20.13	42.22	56.00	-13.78	QP	
11	14.8300	13.00	20.26	33.26	50.00	-16.74	AVG	
12	15.1260	12.36	20.26	32.62	50.00	-17.38	AVG	



## Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: Mode 1  
Test Specification: AC 230V, 50Hz for adapter  
Comment: Neutral Line  
Tem.: 22.3°C Hum.: 51%

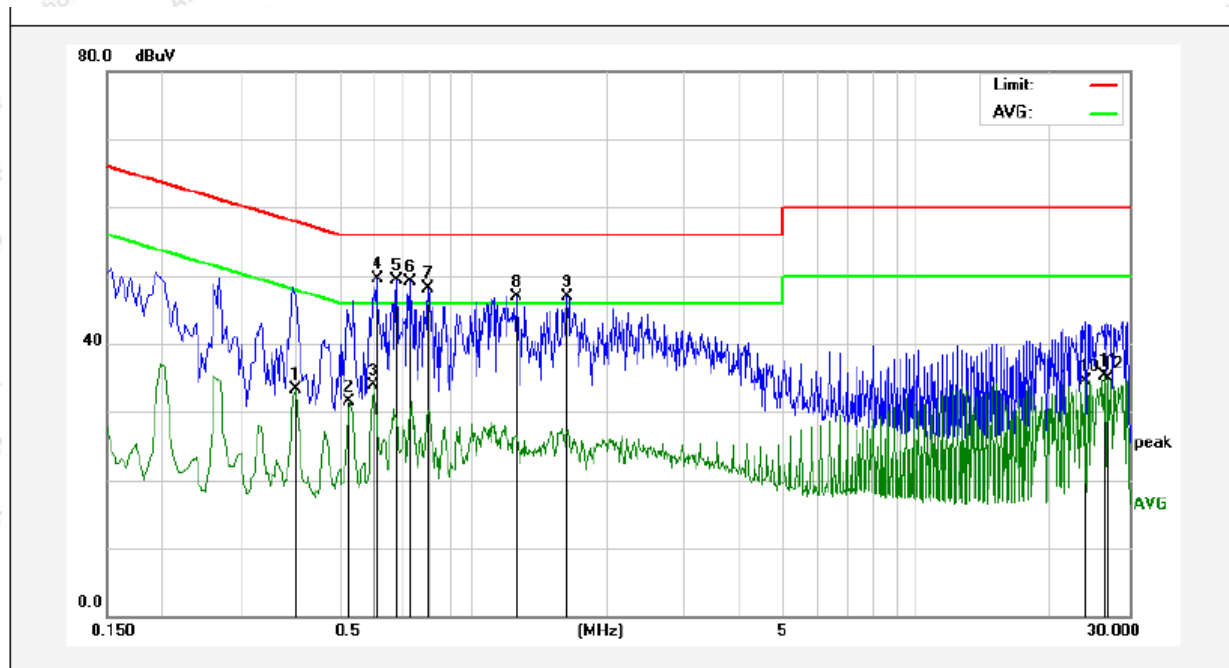

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3980	13.28	19.93	33.21	47.89	-14.68	AVG	
2	0.5299	11.55	19.99	31.54	46.00	-14.46	AVG	
3	0.5980	13.93	20.01	33.94	46.00	-12.06	AVG	
4	0.6100	29.50	20.01	49.51	56.00	-6.49	QP	
5	0.6740	29.29	20.03	49.32	56.00	-6.68	QP	
6	0.7220	29.09	20.05	49.14	56.00	-6.86	QP	
7	0.7940	28.11	20.06	48.17	56.00	-7.83	QP	
8	1.2579	26.82	20.13	46.95	56.00	-9.05	QP	
9	1.6300	26.84	20.13	46.97	56.00	-9.03	QP	
10	23.8660	14.25	20.29	34.54	50.00	-15.46	AVG	
11	26.3940	15.07	20.28	35.35	50.00	-14.65	AVG	
12	26.9780	14.57	20.28	34.85	50.00	-15.15	AVG	

## Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: Mode 1  
Test Specification: AC 110V, 50Hz for adapter  
Comment: Live Line  
Tem.: 22.3°C Hum.: 51%

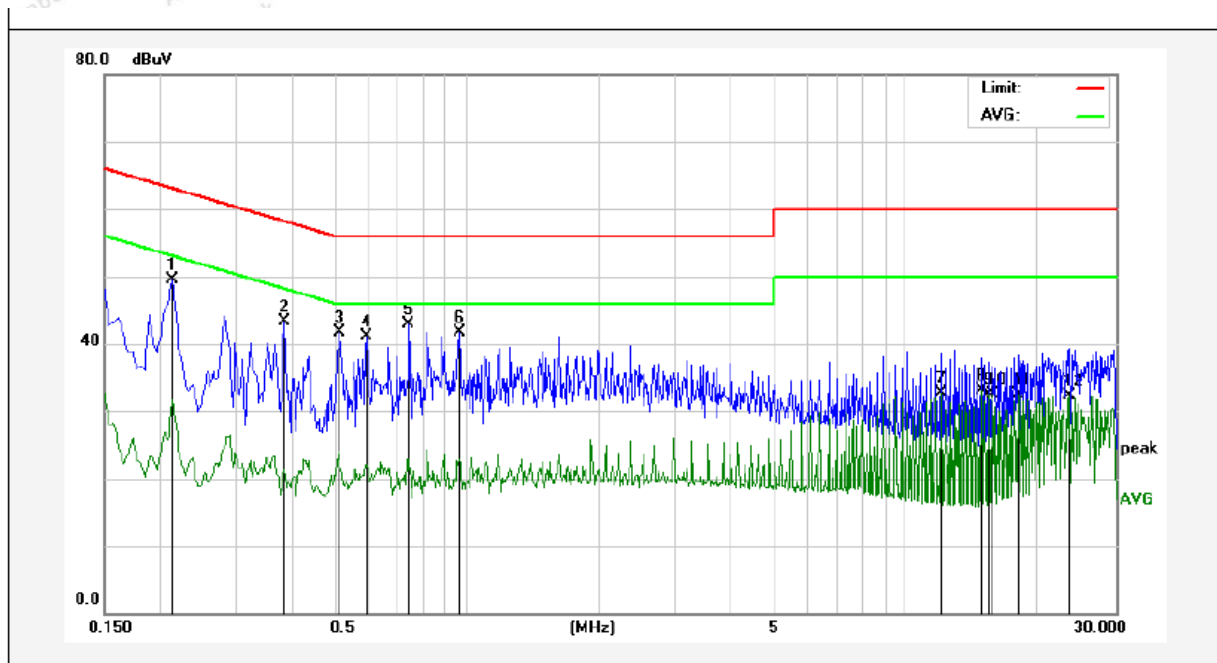

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2140	29.54	19.90	49.44	63.04	-13.60	QP	
2	0.3860	23.44	19.93	43.37	58.15	-14.78	QP	
3	0.5180	21.72	19.99	41.71	56.00	-14.29	QP	
4	0.5940	21.17	20.01	41.18	56.00	-14.82	QP	
5	0.7420	22.92	20.05	42.97	56.00	-13.03	QP	
6	0.9660	21.69	20.11	41.80	56.00	-14.20	QP	
7	12.0140	12.45	20.31	32.76	50.00	-17.24	AVG	
8	14.8380	12.92	20.26	33.18	50.00	-16.82	AVG	
9	15.4300	12.21	20.27	32.48	50.00	-17.52	AVG	
10	15.7260	12.20	20.27	32.47	50.00	-17.53	AVG	
11	17.9540	12.10	20.31	32.41	50.00	-17.59	AVG	
12	23.5900	12.07	20.30	32.37	50.00	-17.63	AVG	

## Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Mode 1  
Test Specification: AC 110V, 50Hz for adapter  
Comment: Neutral Line  
Tem.: 22.3℃ Hum.: 51%

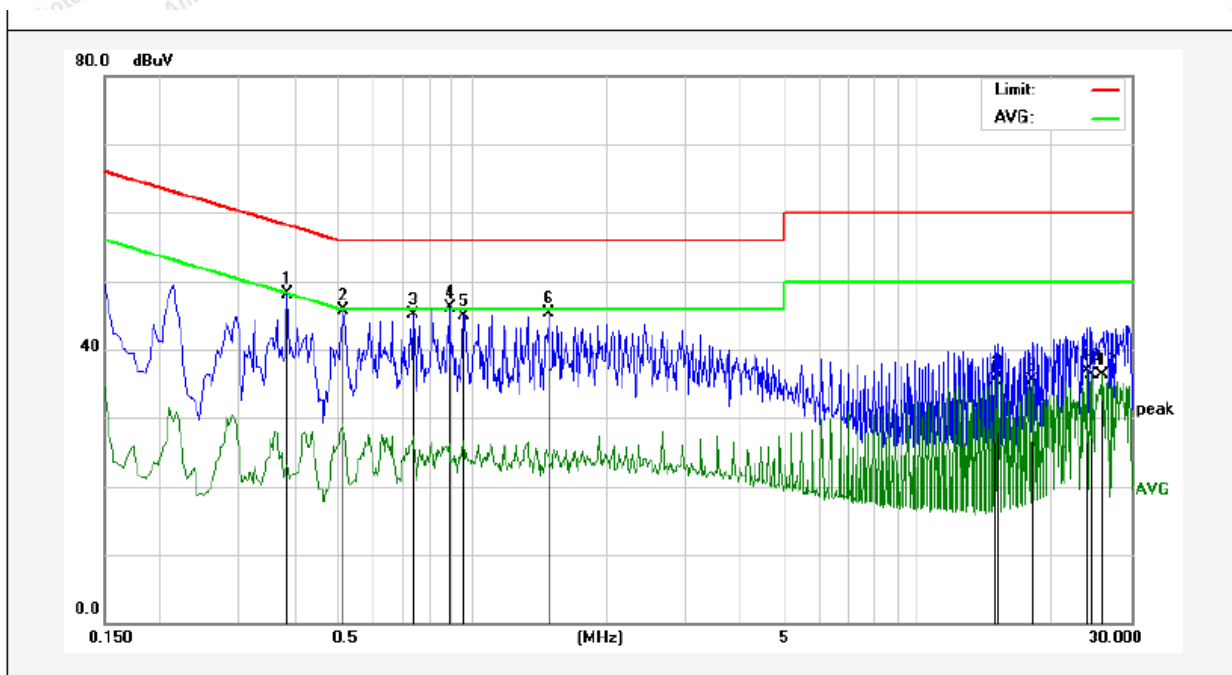

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3860	28.11	19.93	48.04	58.15	-10.11	QP	
2	0.5180	25.64	19.99	45.63	56.00	-10.37	QP	
3	0.7380	25.08	20.05	45.13	56.00	-10.87	QP	
4	0.8900	26.05	20.09	46.14	56.00	-9.86	QP	
5	0.9620	24.88	20.11	44.99	56.00	-11.01	QP	
6	1.4819	25.27	20.13	45.40	56.00	-10.60	QP	
7	14.8380	15.34	20.26	35.60	50.00	-14.40	AVG	
8	15.1380	15.76	20.26	36.02	50.00	-13.98	AVG	
9	17.9580	15.19	20.31	35.50	50.00	-14.50	AVG	
10	23.8940	16.62	20.29	36.91	50.00	-13.09	AVG	
11	24.4860	15.97	20.29	36.26	50.00	-13.74	AVG	
12	25.8260	15.98	20.28	36.26	50.00	-13.74	AVG	



## 3.2. Radiated Emission Test

### 3.2.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.2.0 Clause 8.2
Basic Standard	EN 55032: 2015

Radiated Emission Test Limit (Below 1000MHz)

Frequency (MHz)	Limit (dB $\mu$ V/m)	
	Quasi-peak Level	
	Class B	Class A
30MHz~230MHz	40	50
230MHz~1000MHz	47	57
<b>Remark:</b> 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.		

Radiated Emission Test Limit (Above 1000MHz)

Frequency (MHz)	Limit (dB $\mu$ V/m)			
	Class B		Class A	
	Peak	Average	Peak	Average
1000 MHz -3000 MHz	70	50	76	56
3000 MHz -6000 MHz	74	54	80	60
<b>Remark:</b> 1. The lower limit applies at the transition frequency. 2. The test distance is 3m.				

Radiated Emission Test Limit for FM Receivers

Frequency (MHz)	Limit (dB $\mu$ V/m)	
	Quasi-peak Level	
	Fundamental	Harmonics
30MHz~230MHz	60	52
230MHz~300MHz	60	52
300MHz~1000MHz	60	56
<b>Remark:</b> 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.		

Frequency Range of Radiated Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 6 GHz, whichever is lower

### 3.2.2. Test Setup

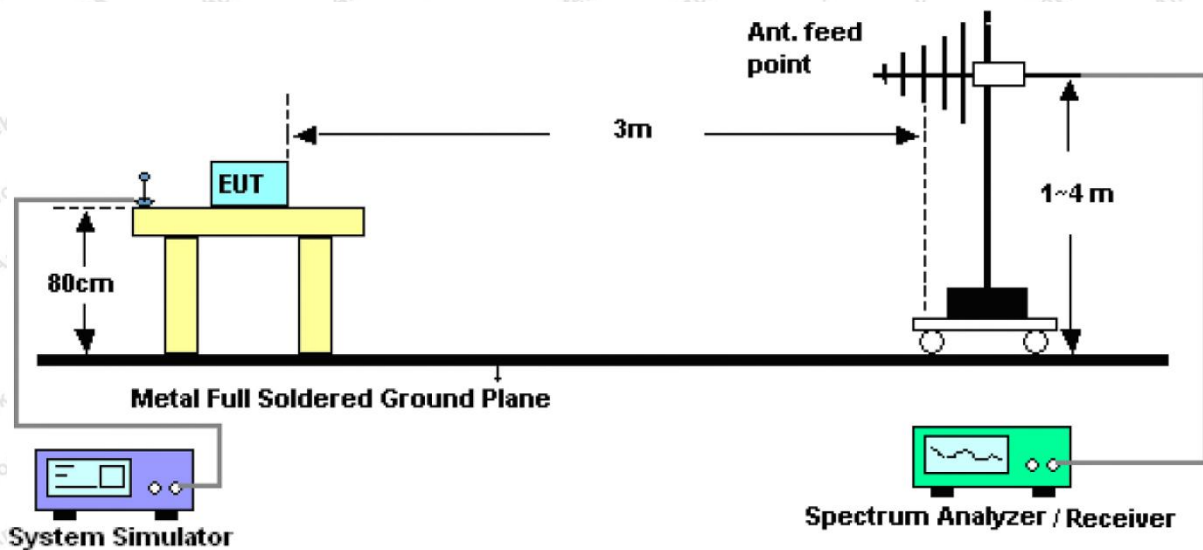


Figure 1. 30MHz to 1GHz

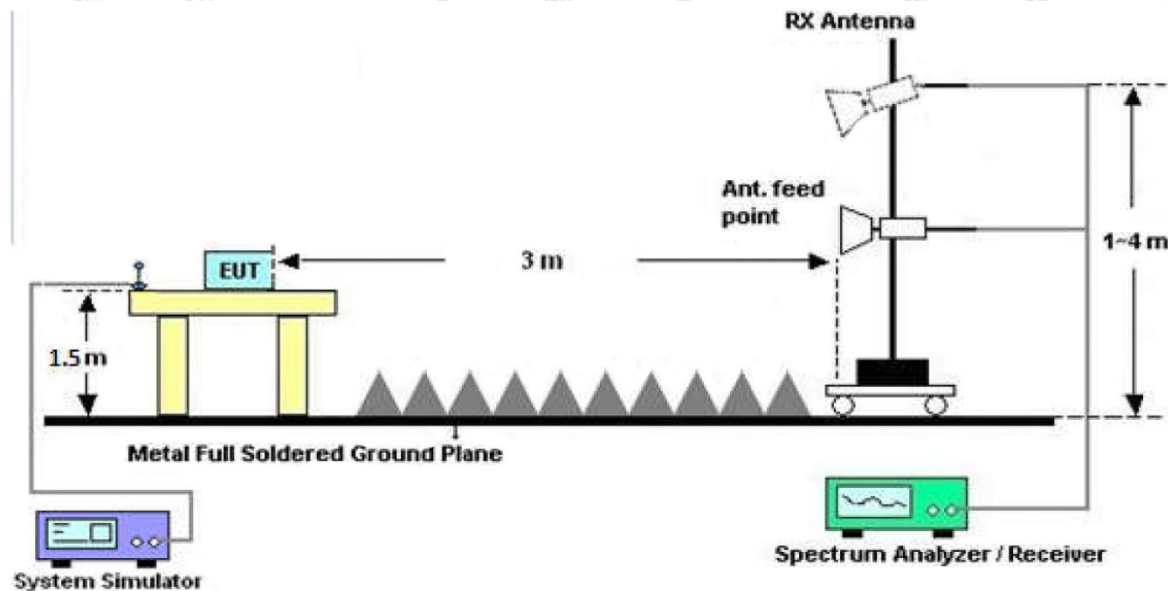


Figure 2. Above 1 GHz

### 3.2.3. Test Procedure

- 1) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- 2) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 3) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold

mode when the test frequency is below 1GHz.

The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.

6) For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak/Average detection at frequency above 1GHz.

### 3.2.4. Test Data

PASS


The EUT should be compliance to the limit of Class B

Only the worst case data was showed in the report, please to see the following pages



### Test Results (30~1000MHz)


Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 24.5°C/53%RH  
Standard: EN301489\_Class B\_3m Power Source: AC 230V, 50Hz for adapter  
Test Mode: Mode 1 Polarization: Horizontal

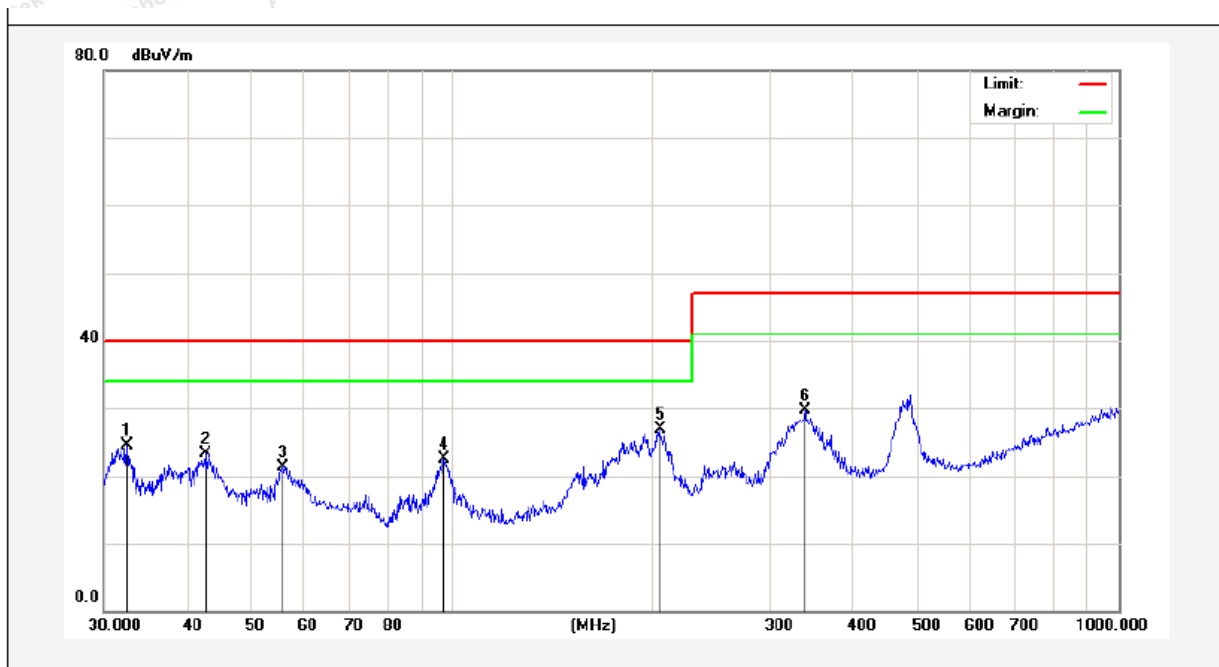

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.5198	42.40	-17.82	24.58	40.00	-15.42	peak			
2	42.7496	38.45	-15.17	23.28	40.00	-16.72	peak			
3	55.6094	39.08	-17.76	21.32	40.00	-18.68	peak			
4	97.1148	44.58	-22.02	22.56	40.00	-17.44	peak			
5	204.9551	46.81	-19.98	26.83	40.00	-13.17	peak			
6	338.4001	44.60	-14.99	29.61	47.00	-17.39	peak			

### Test Results (30~1000MHz)


Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 24.5°C/53%RH  
Standard: EN301489\_Class B\_3m Power Source: AC 230V, 50Hz for adapter  
Test Mode: Mode 1 Polarization: Vertical

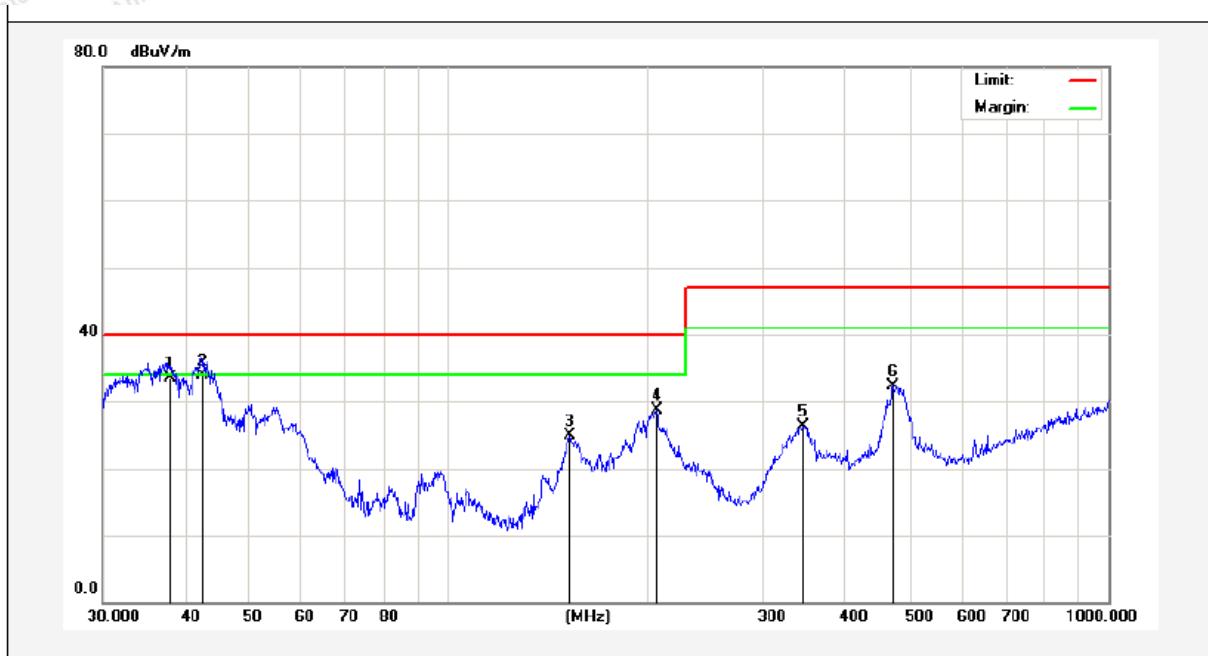

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9365	48.02	-14.50	33.52	40.00	-6.48	QP	100	360	
2	42.5322	48.07	-14.11	33.96	40.00	-6.04	QP	100	0	
3	152.6641	43.05	-18.22	24.83	40.00	-15.17	peak			
4	207.1226	44.31	-15.67	28.64	40.00	-11.36	peak			
5	344.3855	40.11	-13.73	26.38	47.00	-20.62	peak			
6	472.1760	44.02	-11.76	32.26	47.00	-14.74	peak			

### Test Results (30~1000MHz)

Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 24.5°C/53%RH  
Standard: EN301489\_Class B\_3m Power Source: AC 110V, 50Hz for adapter  
Test Mode: Mode 1 Polarization: Horizontal

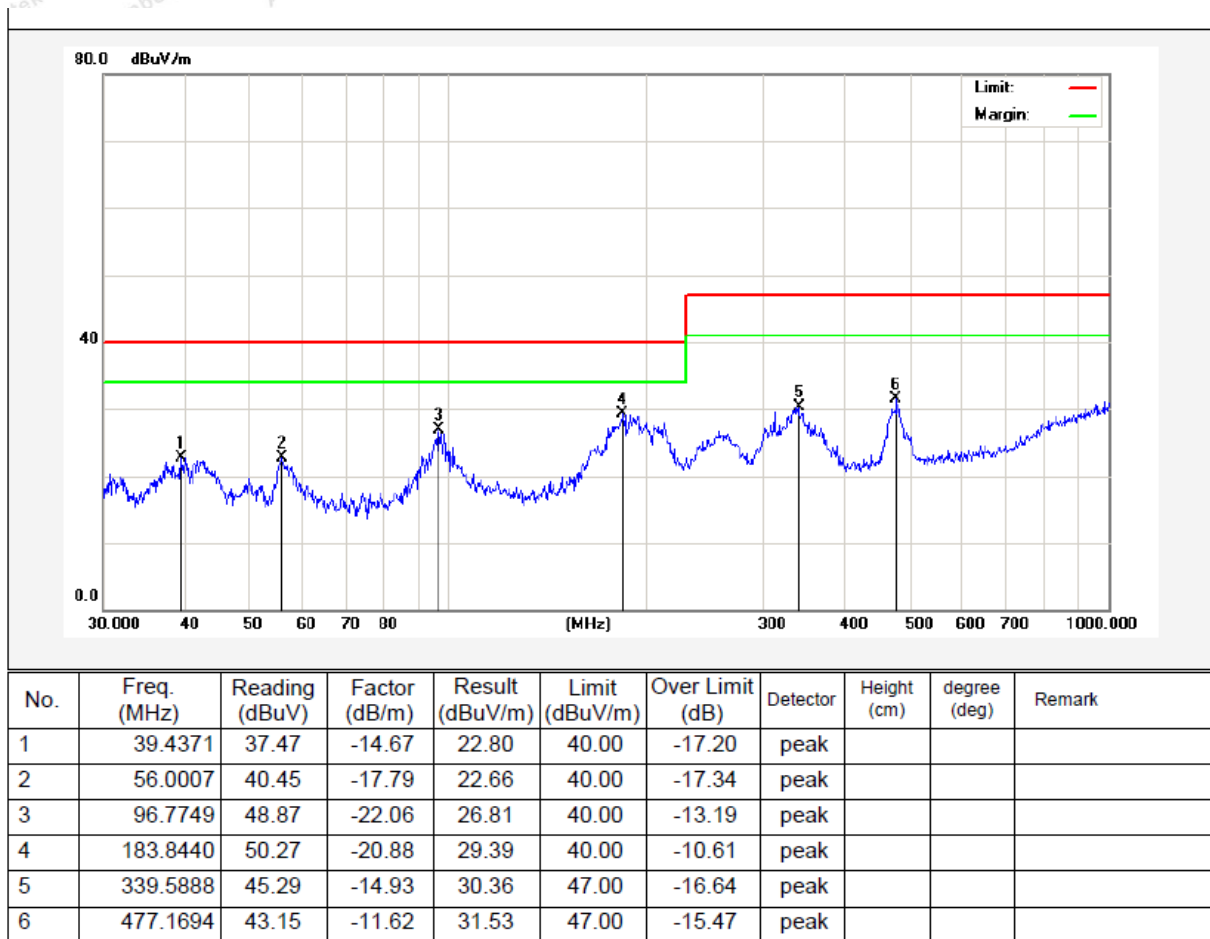



# Test Results (30~1000MHz)

Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 24.5°C/53%RH  
Standard: EN301489\_Class B\_3m Power Source: AC 110V, 50Hz for adapter  
Test Mode: Mode 1 Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.4165	48.69	-14.77	33.92	40.00	-6.08	QP	100		
2	41.2765	47.19	-13.74	33.45	40.00	-6.55	QP	100		
3	49.8814	47.96	-16.52	31.44	40.00	-8.56	peak			
4	103.0800	39.56	-15.72	23.84	40.00	-16.16	peak			
5	207.8501	47.68	-15.65	32.03	40.00	-7.97	peak			
6	482.2156	44.84	-11.47	33.37	47.00	-13.63	peak			

## 4. Immunity Test

### General Performance Criteria

◆ Performance criteria for continuous phenomena applied to transmitters and receivers (CT/CR)

During and after the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for transient phenomena applied to transmitters and receivers (TT/TR)

After the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for equipment which does not provide a continuous communication link

For radio equipment which does not provide a continuous communication link, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.

The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

◆ Performance criteria for ancillary equipment tested on a stand alone basis

If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.


The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

## 4.1. Electrostatic Discharge Test

### 4.1.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.2.0 Clause 9.3
Basic Standard	EN 61000-4-2: 2009
Discharge Impedance:	330 ohm / 150 pF
Performance Criterion:	CT/CR
Discharge Voltage:	Air Discharge: 2kV/4kV/8kV Contact Discharge: 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

### 4.1.2. Test Setup

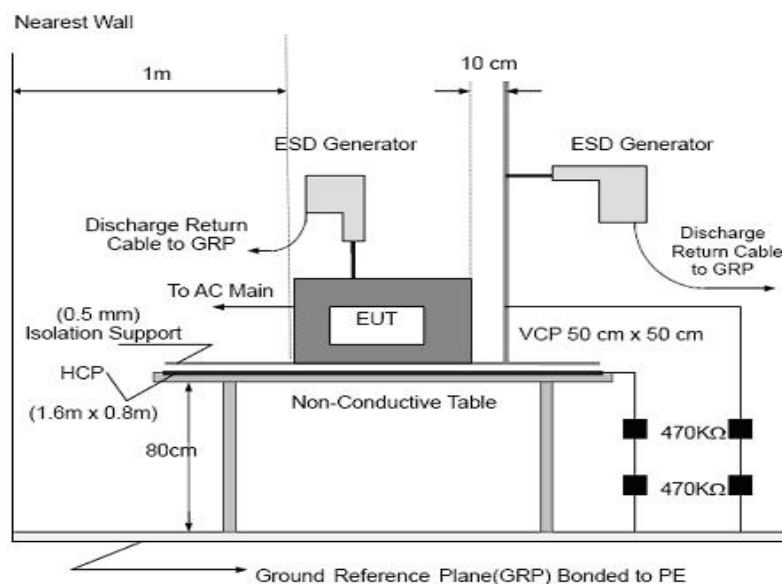

Note:

#### TABLE-TOP EQUIPMENT:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940kohm total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.



#### FLOOR-STANDING EQUIPMENT:

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

#### 4.1.3. Test Procedure

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- 1) Contact discharge was applied to conductive surfaces and coupling planes of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- 2) Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

- 3) For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.4. Test Data

Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
Standard: EN 61000-4-2 Power Source: AC 230V, 50Hz for adapter  
Test Mode: Mode 1

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+6kV	-	-	n.r.r. PASS
-6kV	-	-	n.r.r. PASS
+8kV	-	-	n.r.r. PASS
-8kV	-	-	n.r.r. PASS

Remarks: n.r.r. = no reaction recognized


Performance Criteria B observed and No any function degraded during the tests.

## 4.2. Radiated, RF Electromagnetic Fields Test

### 4.2.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.2.0 Clause 9.2
Basic Standard	EN 61000-4-3: 2006+A1: 2008+A2: 2010
Required Performance	A
Frequency Range	80MHz to 6GHz
Field Strength	3 V/m
Modulation	1kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of preceding frequency value
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.5 m
Dwell Time	at least 0.5 seconds

### 4.2.2. Test Setup

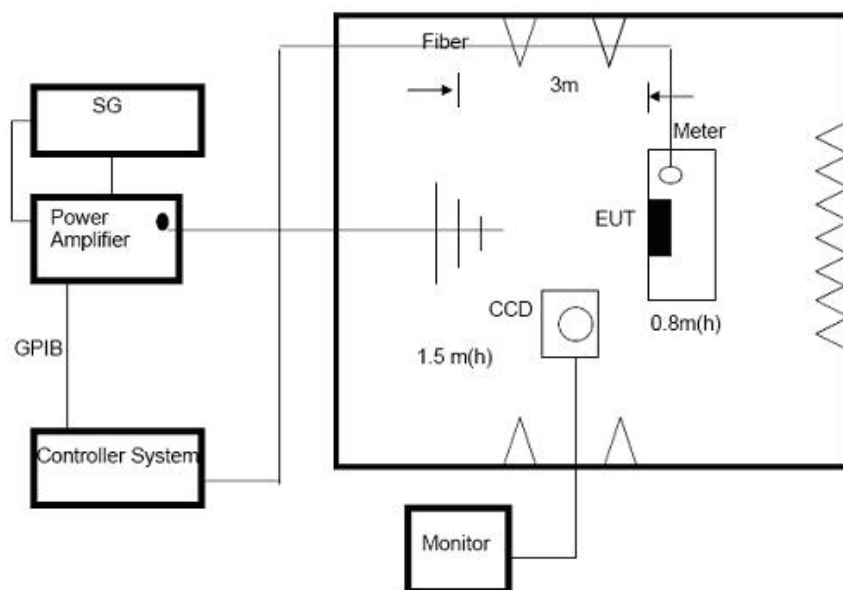

### 4.2.3. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) The field strength level was 3V/m
- 2) The frequency range is swept from 80 MHz to 6000 MHz with the signal 80%amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.

4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

#### 4.2.4. Test Data

Job No.: SZAWW181121001-01E Temp.(°C)/Hum.(%RH): 21.4°C/52.2%RH  
Standard: EN 61000-4-3 Power Source: AC 230V, 50Hz for adapter  
Test Mode: Mode 1

Frequency Range (MHz)	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	<div><input checked="" type="checkbox"/> A    <input type="checkbox"/> B</div> <div><input type="checkbox"/> C    <input type="checkbox"/> D</div>
			Rear	
			Left	
			Right	



## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test

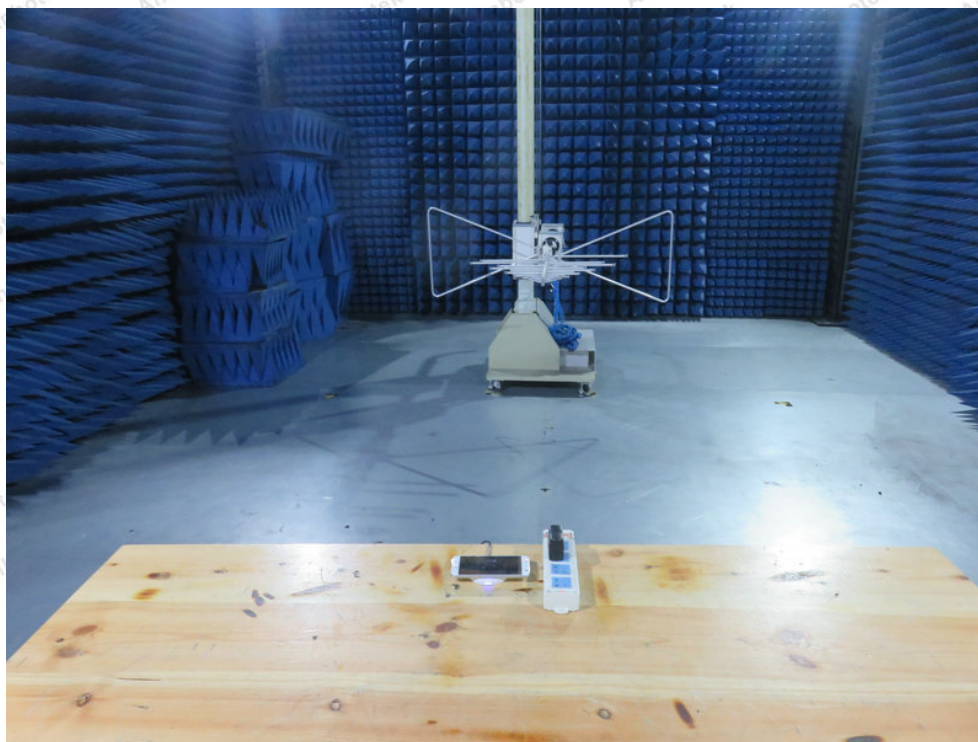




Photo of Electrostatic Discharge Test



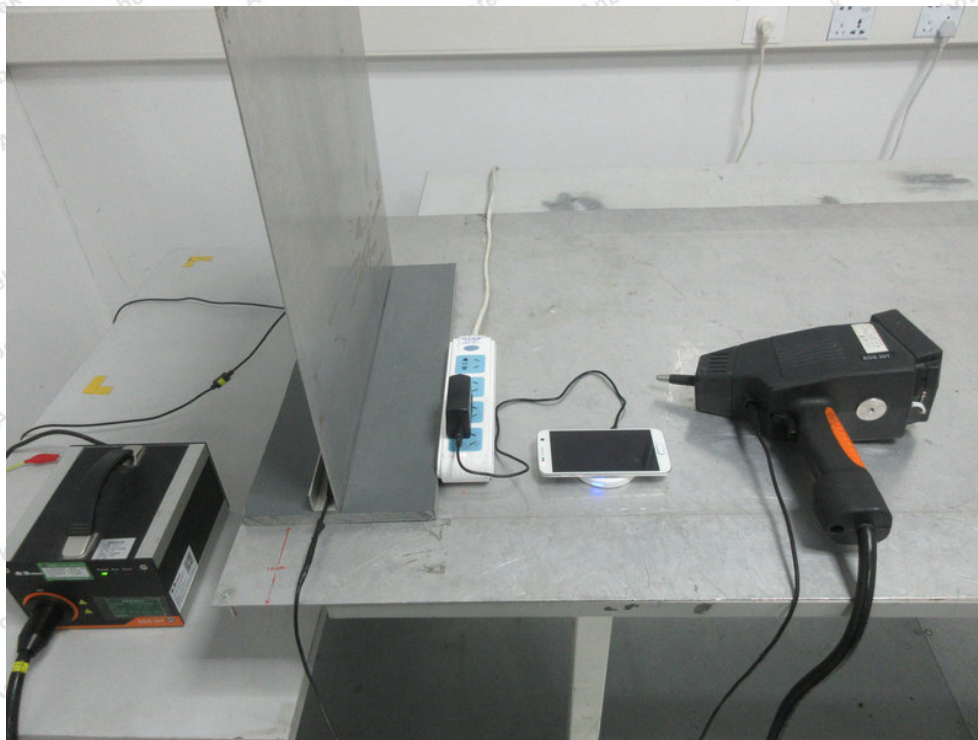


Photo of RF Field Strength Susceptibility Test



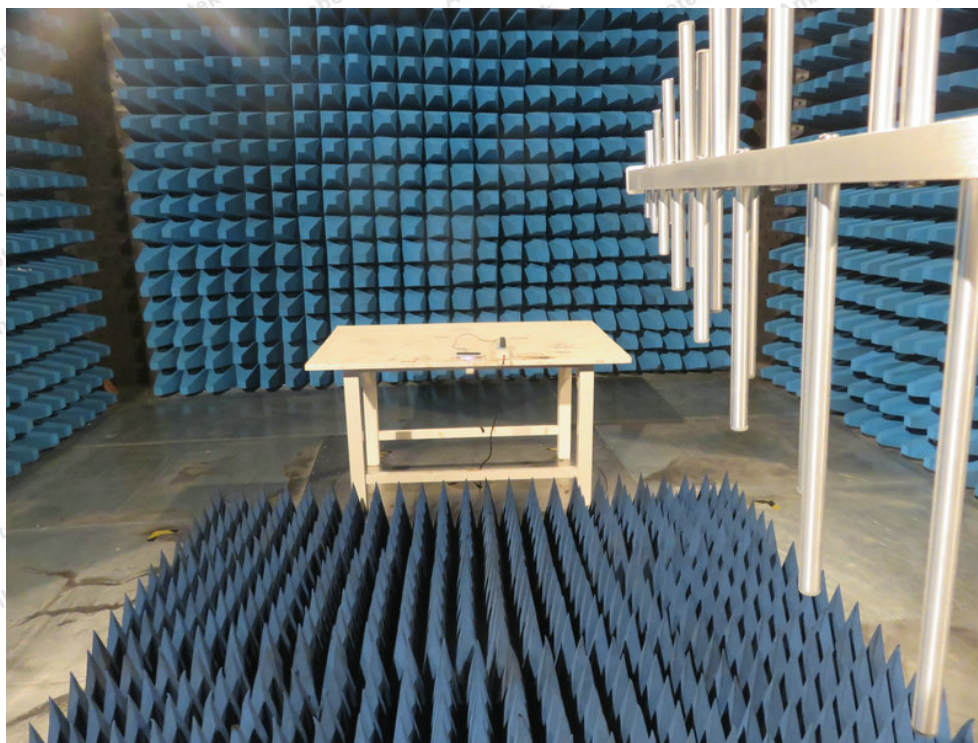

## APPENDIX II -- EXTERNAL PHOTOGRAPH

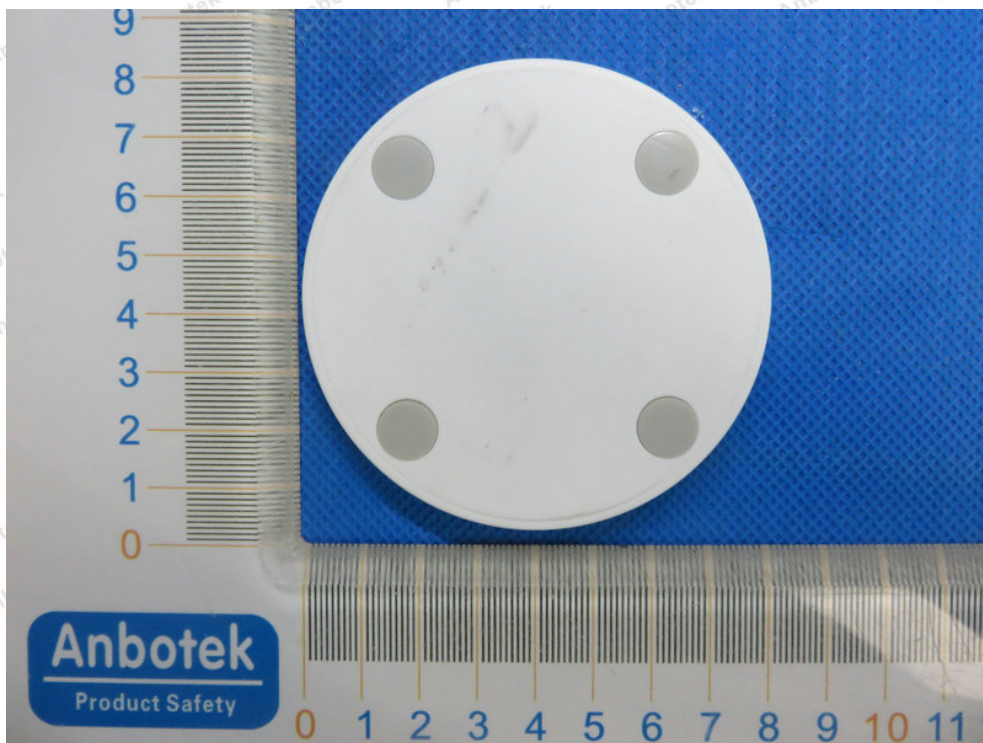
















## APPENDIX III -- INTERNAL PHOTOGRAPH

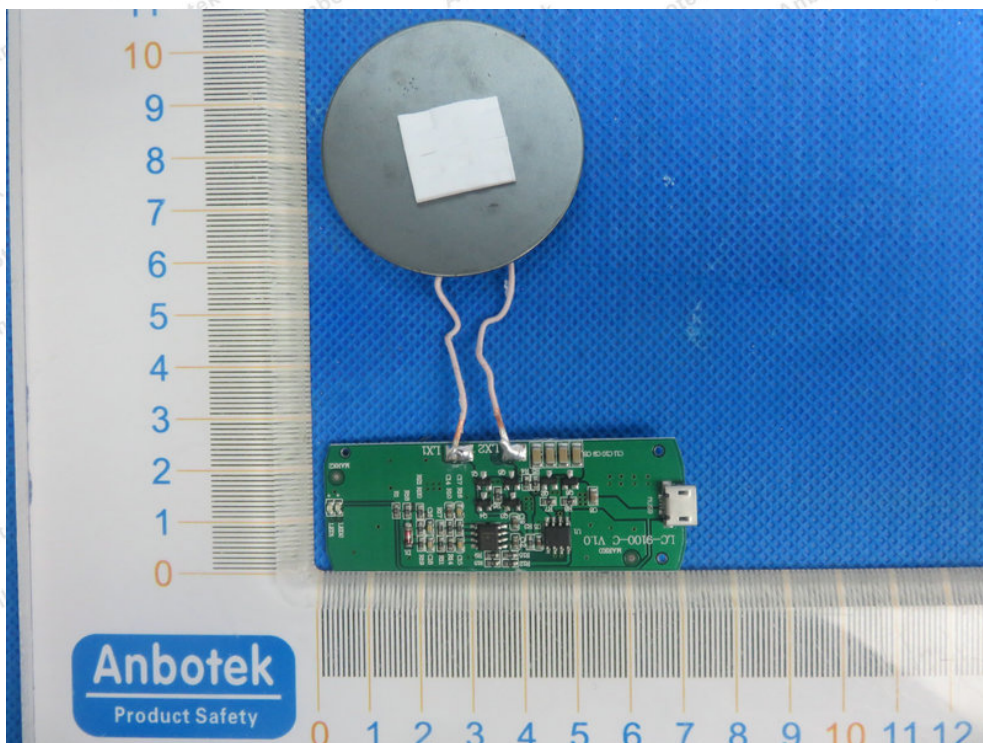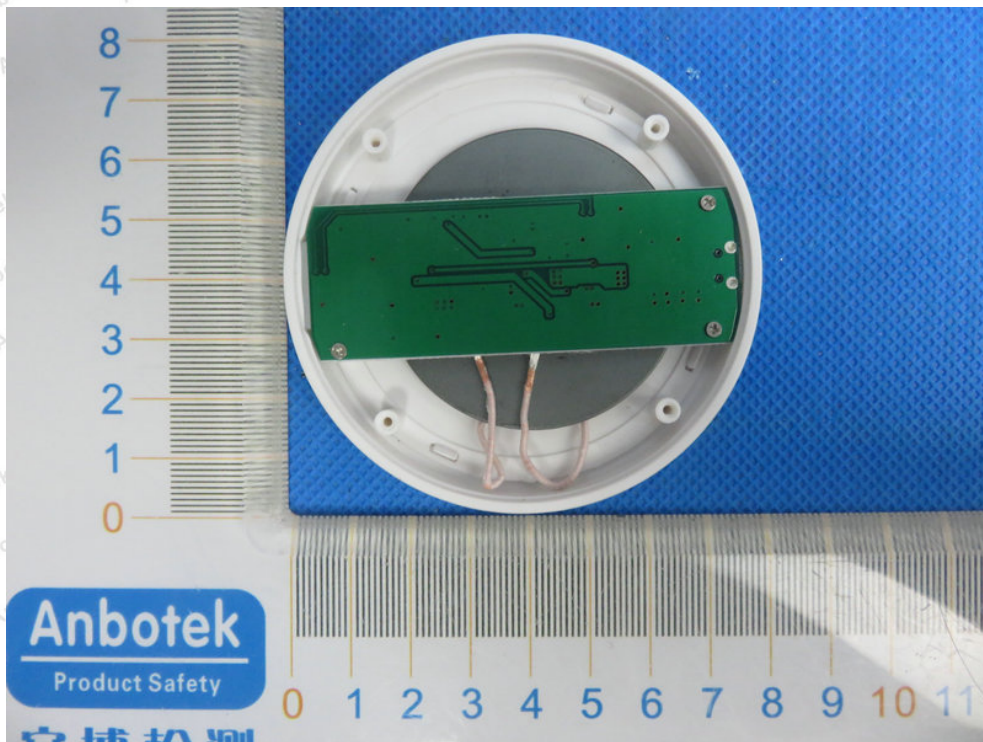



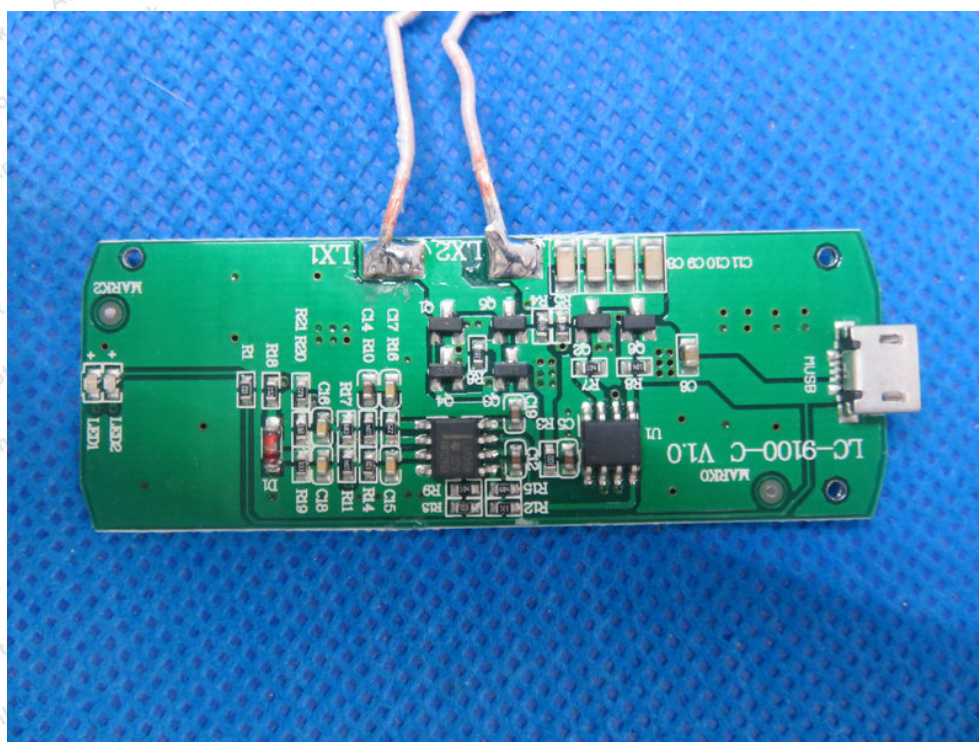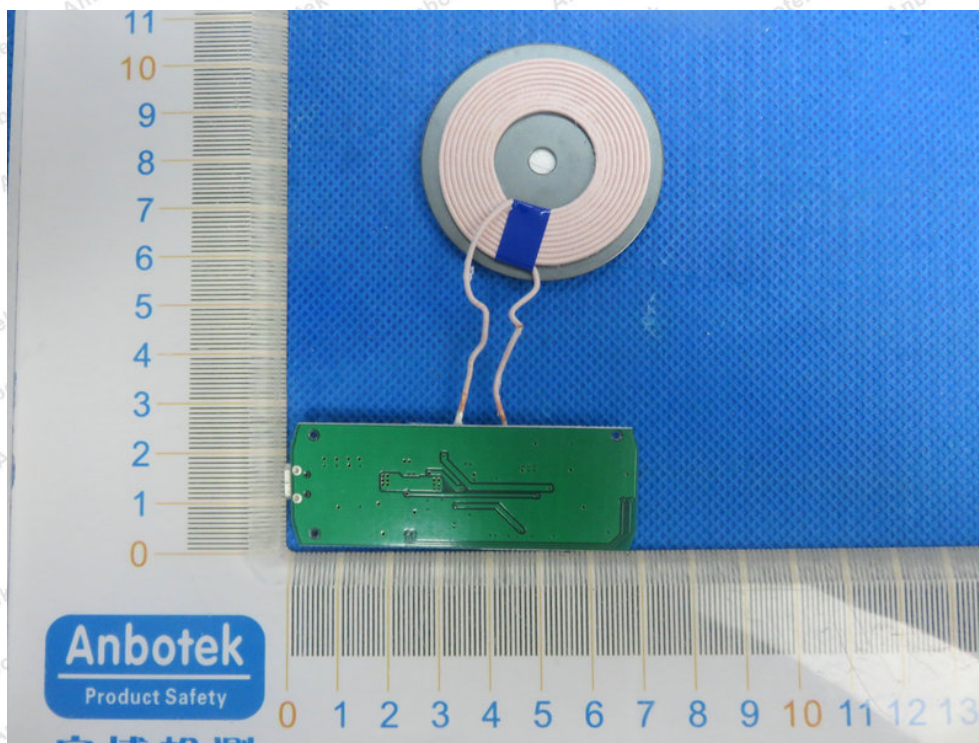



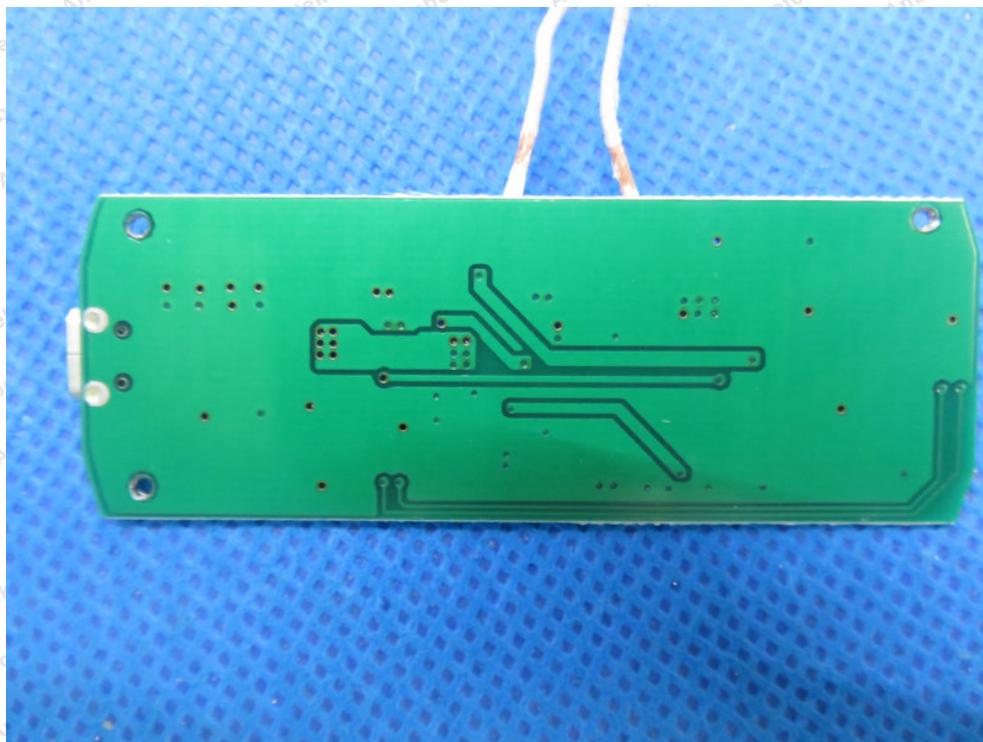

-----End of Report-----