

EMC Test Report

Client Name :

Address :

Product Name : Power Bank

Date : Aug. 01, 2019

Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Code: AB-EMC-02-a



Hotline

400-003-0500

www.anbotech.com

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Test Summary.....	5
1.6. Test Equipment List.....	6
1.7. Description of Test Facility.....	7
1.8. EMS Performance Criteria.....	7
2. Radiated Emission Test.....	8
2.1. Test Standard and Limit.....	8
2.2. Test Setup.....	8
2.3. EUT Configuration on Measurement.....	8
2.4. Operating Condition of EUT.....	9
2.5. Test Procedure.....	9
2.6. Test Results.....	9
3. Electrostatic Discharge Immunity Test.....	16
3.1. Test Standard and Level.....	16
3.2. Test Setup.....	16
3.3. EUT Configuration on Measurement.....	16
3.4. Operating Condition of EUT.....	16
3.5. Test Procedure.....	17
3.6. Test Results.....	17
4. RF Field Strength Susceptibility Test.....	19
4.1. Test Standard and Level.....	19
4.2. Test Setup.....	19
4.3. EUT Configuration on Measurement.....	20
4.4. Operating Condition of EUT.....	20
4.5. Test Procedure.....	20
4.6. Measuring Results.....	20
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	22
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	24
APPENDIX III -- INTERNAL PHOTOGRAPH.....	26

TEST REPORT

Applicant :
Manufacturer :
Product Name : Power Bank
Model No. : PW33
Trade Mark : N.A.
Rating(s) : Input: 5V \equiv 1.5A
Output: 5V \equiv 2A
Test Standard(s) : EN 55032: 2015;
EN 55024: 2010+A1: 2015;
(IEC 61000-4-2; IEC 61000-4-3)

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55032 and EN 55024 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt: Jun. 19, 2019

Date of Test: Jun. 19~26, 2019

Prepared By:

Oliay Yang
(Engineer / Oliay Yang)

Reviewer:

Well Wang
(Supervisor / Well Wang)

Approved & Authorized Signer:

Sally Zhang
(Manager / Sally Zhang)




Shenzhen Anbotech Compliance Laboratory Limited

Code:AB-EMC-02-a

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

 Hotline
400-003-0500
www.anbotech.com

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

1. General Information

1.1. Client Information

Applicant	:	
Address	:	
Manufacturer	:	
Address	:	
Factory	:	
Address	:	

1.2. Description of Device (EUT)

Product Name	:	Power Bank
Model No.	:	PW33
Trade Mark	:	N.A.
Test Power Supply	:	DC 5V for adapter / DC 3.7V by battery
Test Sample No.	:	1-1-1
Product Description	:	Adapter: N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

N/A	:	
-----	---	--

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

1.4. Description of Test Modes

Pretest Modes	Descriptions
Mode 1	Micro Charging
Mode 2	Type-C Charging
Mode 3	Full Load

For Mode 1 & Mode 2 Block Diagram of Test Setup



For Mode 3 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Test Modes	Status
Power Line Conducted Emission Test (150KHz To 30MHz)	/	N
Radiated Emission Test (30MHz To 1000MHz)	All Mode	P
Electrostatic Discharge immunity Test	All Mode	P
RF Field Strength susceptibility Test	All Mode	P
Electrical Fast Transient/Burst Immunity Test	/	N
Surge Immunity Test	/	N
Injected Currents Susceptibility Test	/	N
Magnetic Field Susceptibility Test	/	N
Voltage Dips and Interruptions Test	/	N
P) Indicates "PASS". N) Indicates "Not applicable".		

1.6. Test Equipment List

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
2.	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	May. 05, 2019	1 Year
3.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	EMEC-3A1	N/A	N/A	N/A

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3Ctest	EDS-30T	ES0131505	Nov. 26, 2018	1 Year

R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
2	Amplifier	Micotoop	MPA-80-1000-250	MPA1903096	N/A	N/A
3	Amplifier	Micotoop	MPA-1000-6000-100	MPA1903122	N/A	N/A
4	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	Aug. 17, 2018	3 Year
5	Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	3 Year
6	Power Sensor	Agilent	E9301A	MY41498906	Nov. 05, 2018	1 Year
7	Power Sensor	Agilent	E9301A	MY41498088	Nov. 05, 2018	1 Year
8	Power Meter	Agilent	E4419B	GB40202909	Nov. 05, 2018	1 Year
9	Field Probe	ETS-Lindgren	HI-6006	00212747	Apr. 20, 2017	3 Year
10	software	EMtrace	EM 3	N/A	N/A	N/A

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2018.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

1.8. EMS Performance Criteria

- ✓ A: Normal performance within the specification limits
- ✓ B: Temporary degradation or loss of function or performance which is self-recoverable
- ✓ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- ✓ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

2. Radiated Emission Test


2.1. Test Standard and Limit

Test Standard	EN 55032
---------------	----------

Radiated Emission Test Limit

Test Limit	Frequency (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dBμV/m)
	30 ~ 230	3	40
	230 ~ 1000	3	47
Remark: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT. (3) $3M \text{ Limit} = 10M \text{ Limit} + k$ $k = 20\log(D1/D2) = 10$ $3M \text{ Limit} = 10M \text{ Limit} + 10$ ($D1 = 10M$ $D2 = 3M$)			

2.2. Test Setup

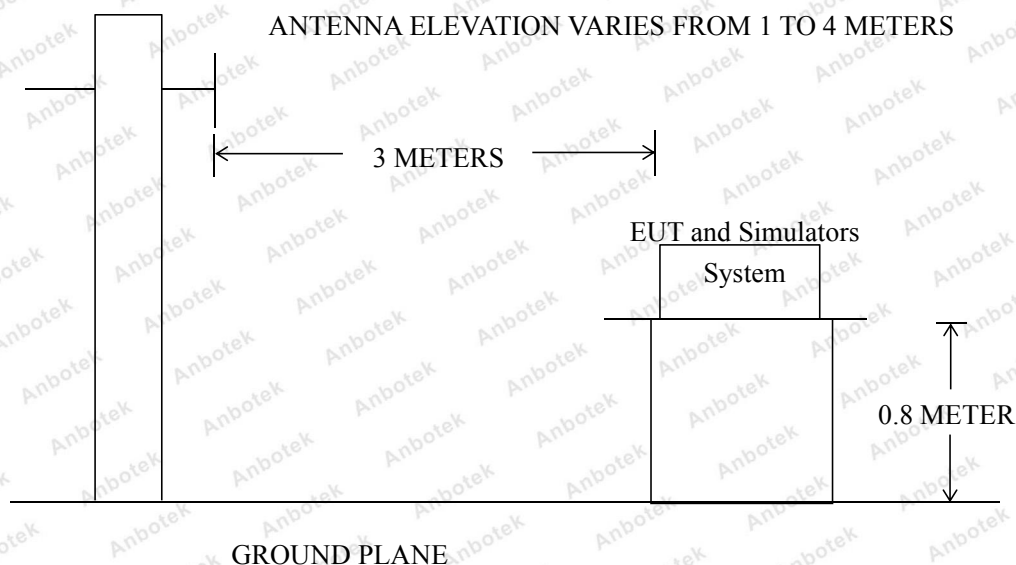

2.3. EUT Configuration on Measurement

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

2.4. Operating Condition of EUT

2.4.1. Setup the EUT as shown in Section 2.2.

2.4.2. Turn on the power of all equipments.

2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 2.6.

2.6. Test Results

PASS

The frequency range from 30MHz to 1000MHz is investigated.

The test curves are shown in the following pages.



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test item:	Radiation Test	Polarization:	Horizontal
Standard:	(RE)EN 55032	Power Source:	DC 5V for adapter
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.6(°C)/57%RH
Test Mode:	Micro Charging		




No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.3681	35.30	-12.43	22.87	40.00	-17.13	peak			
2	93.7685	48.19	-23.43	24.76	40.00	-15.24	peak			
3	150.5378	58.76	-25.01	33.75	40.00	-6.25	peak			
4	239.5670	52.50	-20.60	31.90	47.00	-15.10	peak			
5	293.0842	46.93	-20.38	26.55	47.00	-20.45	peak			
6	384.6055	37.30	-15.89	21.41	47.00	-25.59	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)EN 55032	Power Source:	DC 5V for adapter
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.6(°C)/57%RH
Test Mode:	Micro Charging		

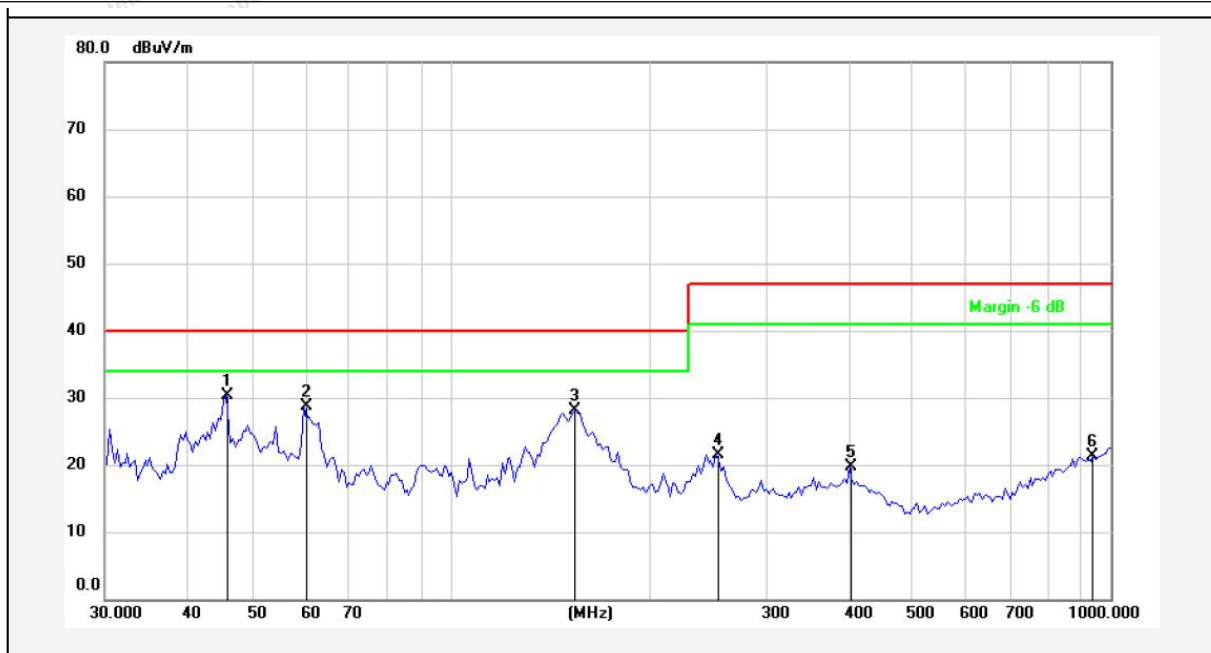


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.6948	43.62	-13.35	30.27	40.00	-9.73	peak			
2	59.9639	44.56	-15.93	28.63	40.00	-11.37	peak			
3	154.5493	48.95	-20.76	28.19	40.00	-11.81	peak			
4	252.5051	38.00	-16.43	21.57	47.00	-25.43	peak			
5	401.8385	34.29	-14.63	19.66	47.00	-27.34	peak			
6	940.4801	32.76	-11.41	21.35	47.00	-25.65	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test item:	Radiation Test	Polarization:	Horizontal
Standard:	(RE)EN 55032	Power Source:	DC 5V for adapter
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.6(°C)/57%RH
Test Mode:	Type-C Charging		

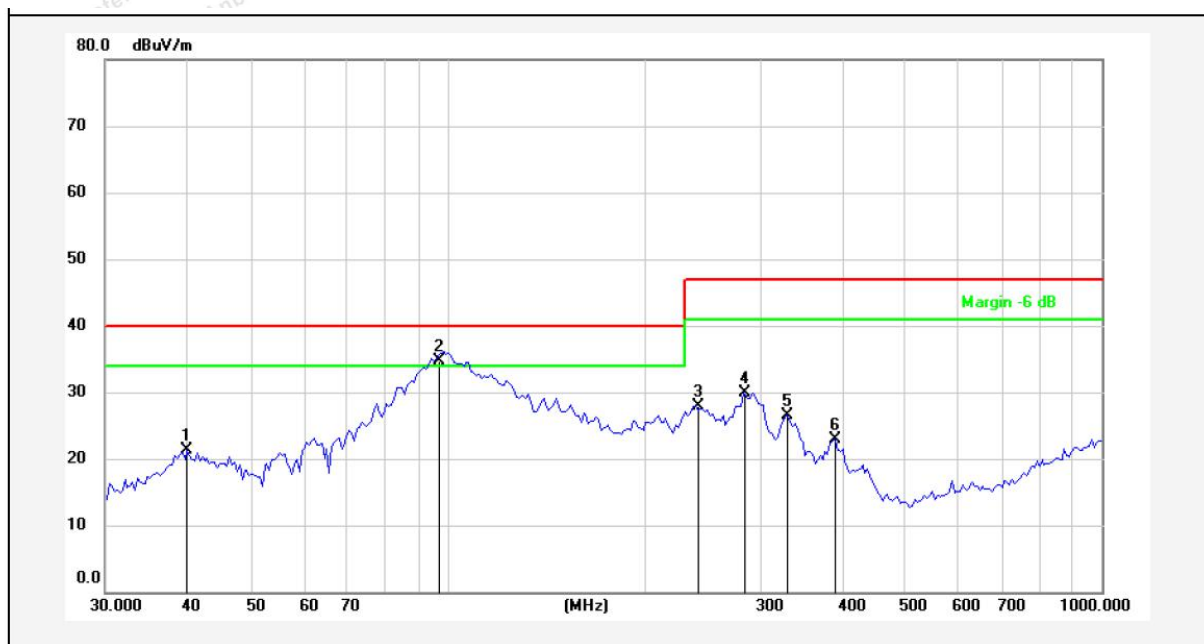


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.0644	33.20	-11.96	21.24	40.00	-18.76	peak			
2	96.5826	57.97	-23.19	34.78	40.00	-5.22	QP	300	0	
3	239.5670	48.60	-20.60	28.00	47.00	-19.00	peak			
4	282.9852	50.51	-20.63	29.88	47.00	-17.12	peak			
5	331.3546	43.85	-17.35	26.50	47.00	-20.50	peak			
6	391.4082	38.70	-15.75	22.95	47.00	-24.05	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)EN 55032	Power Source:	DC 5V for adapter
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.6(°C)/57%RH
Test Mode:	Type-C Charging		

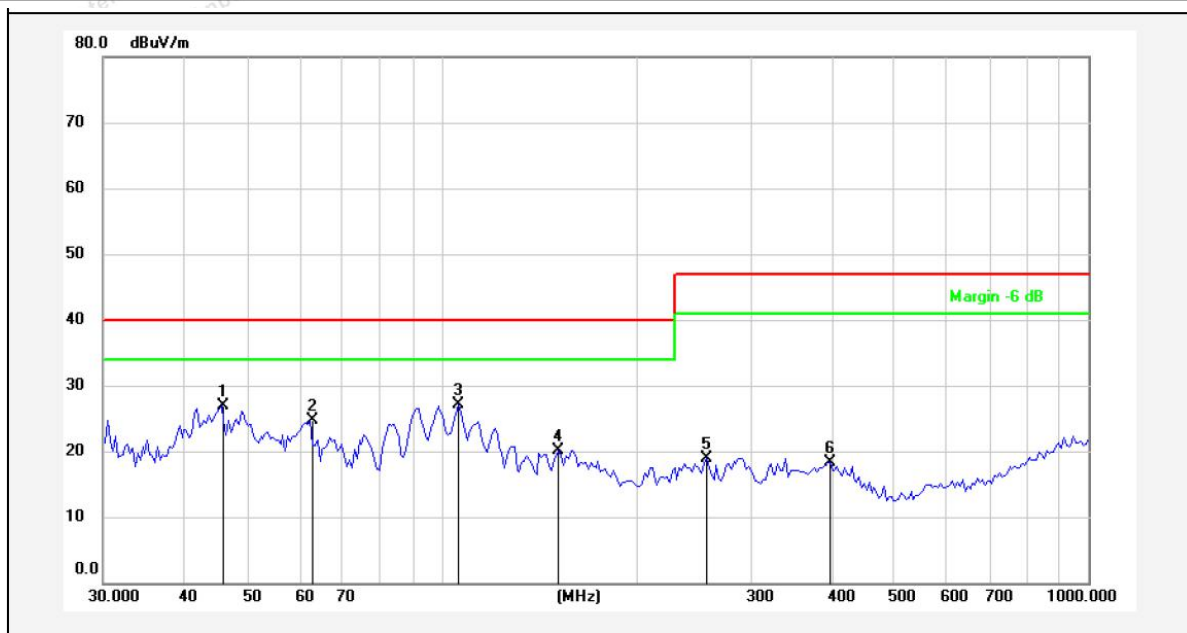


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.6948	40.31	-13.35	26.96	40.00	-13.04	peak			
2	62.6507	41.66	-17.05	24.61	40.00	-15.39	peak			
3	106.0126	44.70	-17.63	27.07	40.00	-12.93	peak			
4	151.8632	41.08	-20.92	20.16	40.00	-19.84	peak			
5	256.9712	35.32	-16.41	18.91	47.00	-28.09	peak			
6	398.3312	32.93	-14.63	18.30	47.00	-28.70	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN 55032 **Power Source:** DC 3.7V by battery
Distance: 3m **Temp.(°C)/Hum.(%RH):** 22.6(°C)/57%RH
Test Mode: Full Load

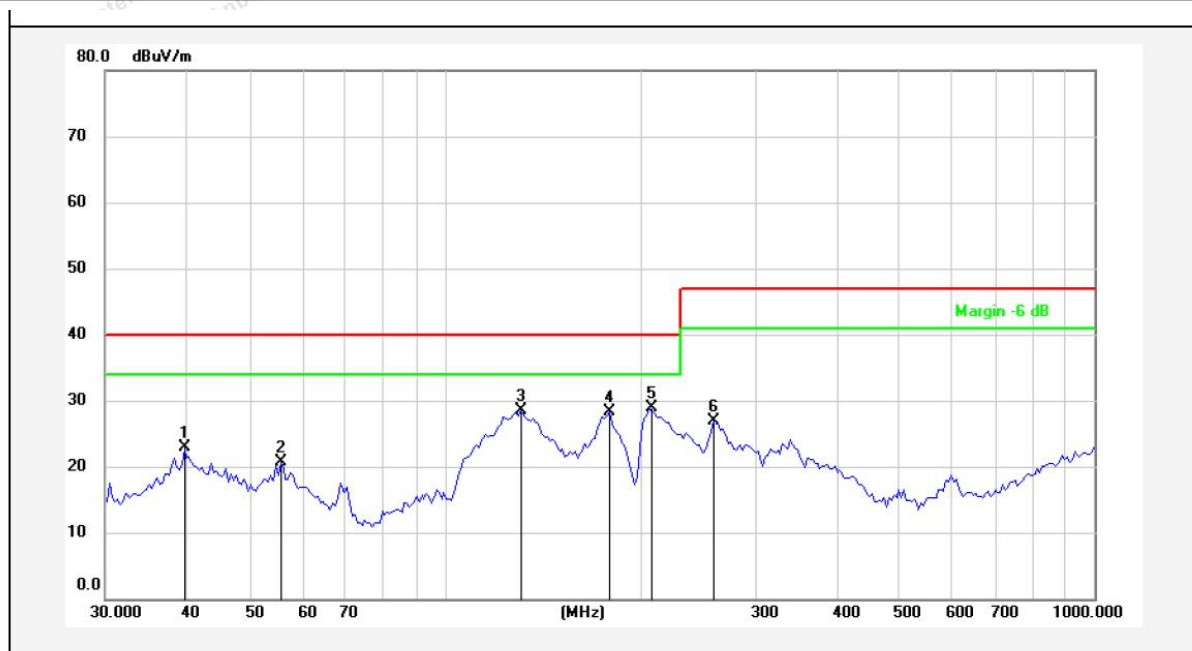


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.7146	35.01	-12.15	22.86	40.00	-17.14	peak			
2	55.9026	37.18	-16.52	20.66	40.00	-19.34	peak			
3	130.8369	54.00	-25.45	28.55	40.00	-11.45	peak			
4	179.3863	51.72	-23.49	28.23	40.00	-11.77	peak			
5	206.3976	51.64	-22.66	28.98	40.00	-11.02	peak			
6	259.2338	48.21	-21.37	26.84	47.00	-20.16	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)EN 55032	Power Source:	DC 3.7V by battery
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.6(°C)/57%RH
Test Mode:	Full Load		

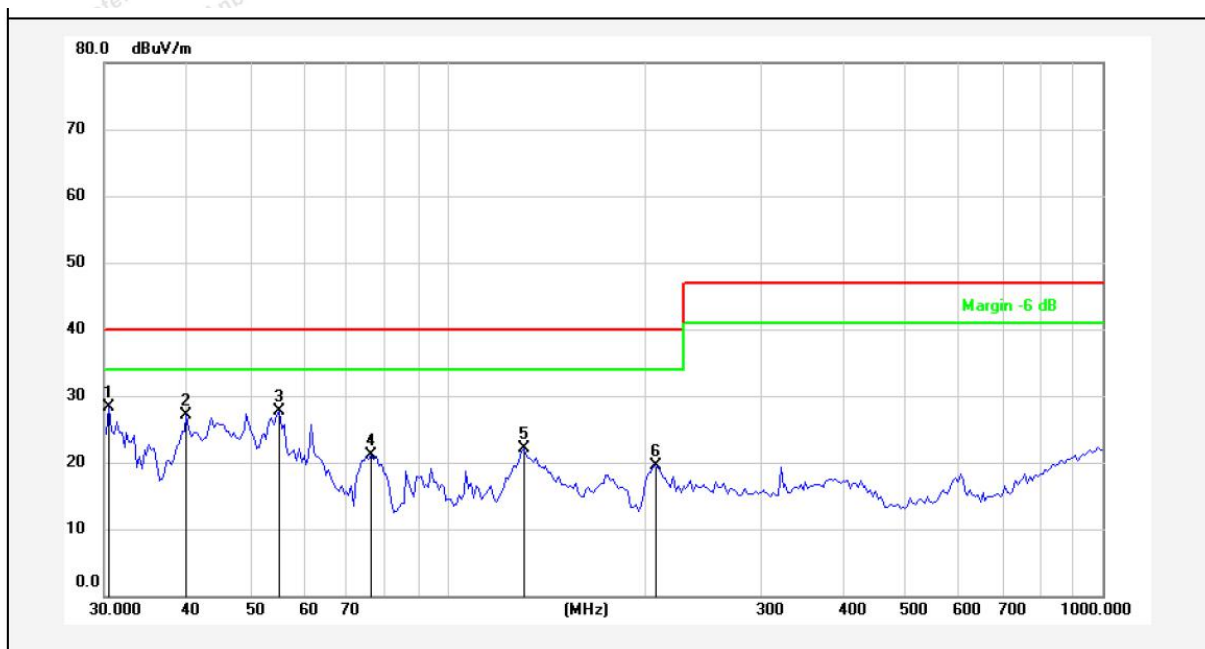

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.5306	45.64	-17.34	28.30	40.00	-11.70	peak			
2	40.0644	38.04	-10.96	27.08	40.00	-12.92	peak			
3	55.4147	43.11	-15.47	27.64	40.00	-12.36	peak			
4	76.6463	42.17	-21.03	21.14	40.00	-18.86	peak			
5	130.8369	42.69	-20.62	22.07	40.00	-17.93	peak			
6	206.3976	37.91	-18.34	19.57	40.00	-20.43	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

3. Electrostatic Discharge Immunity Test


3.1. Test Standard and Level

Test Standard:	EN 55024 (IEC 61000-4-2)
Performance Criterion:	B
Severity Level: 3 / Air Discharge: $\pm 8\text{kV}$, Level: 2 / Contact Discharge: $\pm 4\text{kV}$	

Test Level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X.	Special	Special

3.2. Test Setup

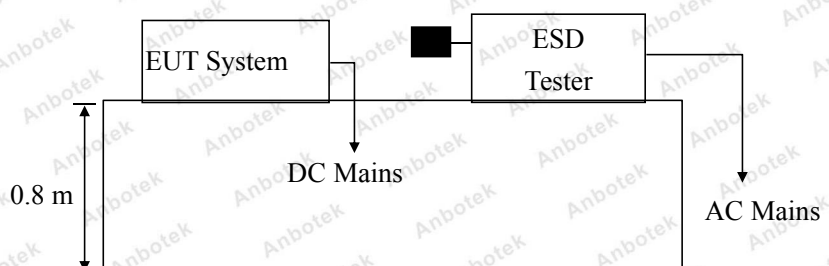

3.3. EUT Configuration on Measurement

The following equipments are installed on electrostatic discharge immunity measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT as shown on Section 3.2.

3.4.2. Turn on the power of all equipments.

3.4.3. After that, let the EUT work in test mode measure it.

3.5. Test Procedure

3.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 25 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

3.5.2. Contact Discharge:

All the procedure shall be same as Section 3.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

3.5.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

3.5.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

3.6. Test Results

PASS

Please refer to the following page.

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

Electrostatic Discharge Test Results

Air discharge :	±8.0kV	Temperature :	23.5℃
Contact discharge :	±4.0kV	Humidity :	52%
Power Supply :	DC 5V for adapter / DC 3.7V by battery	Expert conclusion :	B
Number of discharge :	25	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Location		Kind A-Air Discharge C-Contact Discharge	Result
Slot of the EUT	6 points	A	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Discharging Port	3 points	A	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Charging Port	2 points	A	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the front	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the rear	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the left	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the right	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).			

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

4. RF Field Strength Susceptibility Test


4.1. Test Standard and Level

Test Standard:	EN 55024 (IEC 61000-4-3)
Required Performance:	A
Frequency Range:	80MHz to 1000MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 0.5s

Test Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

4.2. Test Setup

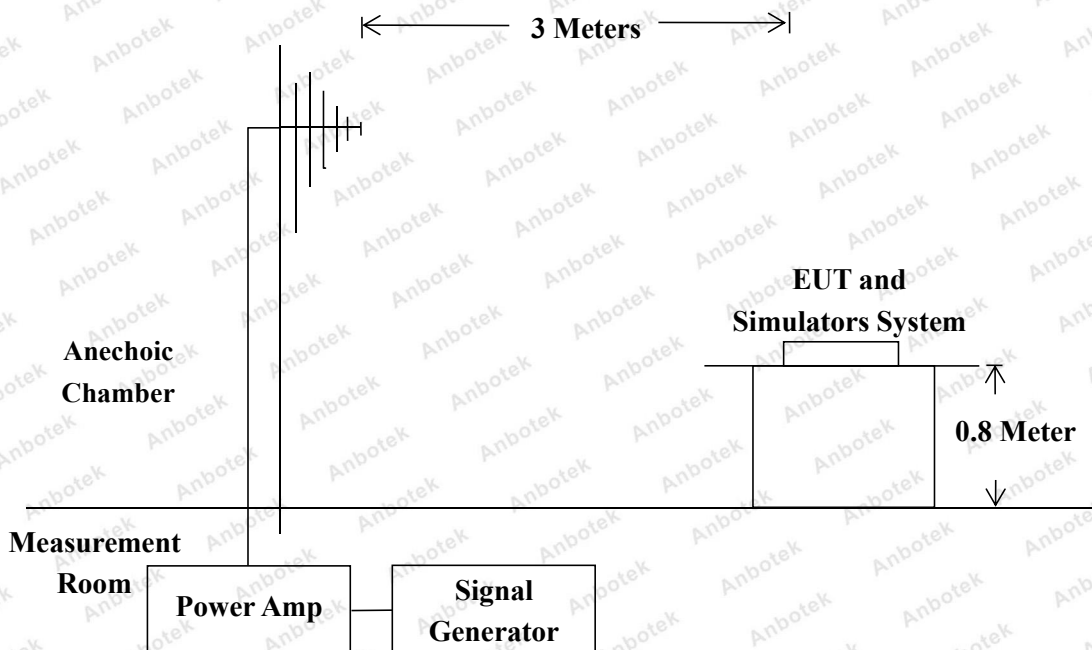

4.3. EUT Configuration on Measurement

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown on Section 4.2.

4.4.2. Turn on the power of all equipments.

4.4.3. After that, let the EUT work in test mode measure it.

4.5. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) The field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.6. Measuring Results

PASS

Please refer to the following page.

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

RF Field Strength Susceptibility Test Results

Field Strength :	3V/m	Temperature :	23.5℃
Expert conclusion :	A	Humidity :	52%
Power Supply :	DC 5V for adapter / DC 3.7V by battery	Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Dwell Time:	1s		

Frequency Range (MHz)	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80~1000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	<div><input checked="" type="checkbox"/> A <input type="checkbox"/> B</div> <div><input type="checkbox"/> C <input type="checkbox"/> D</div>
			Rear	
			Left	
			Right	

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiated Emission Test



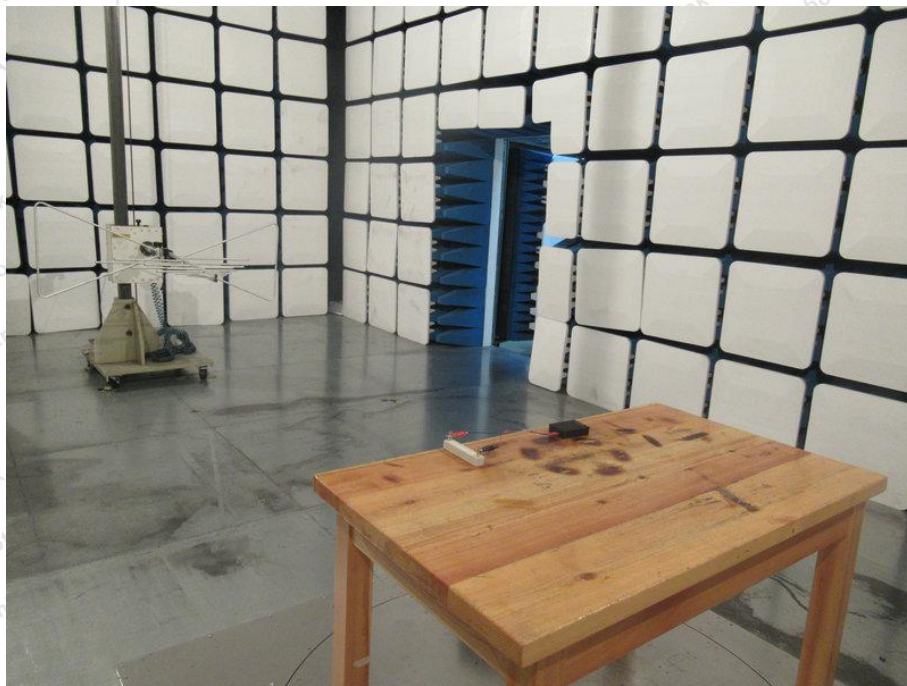



Photo of Electrostatic Discharge Immunity Test

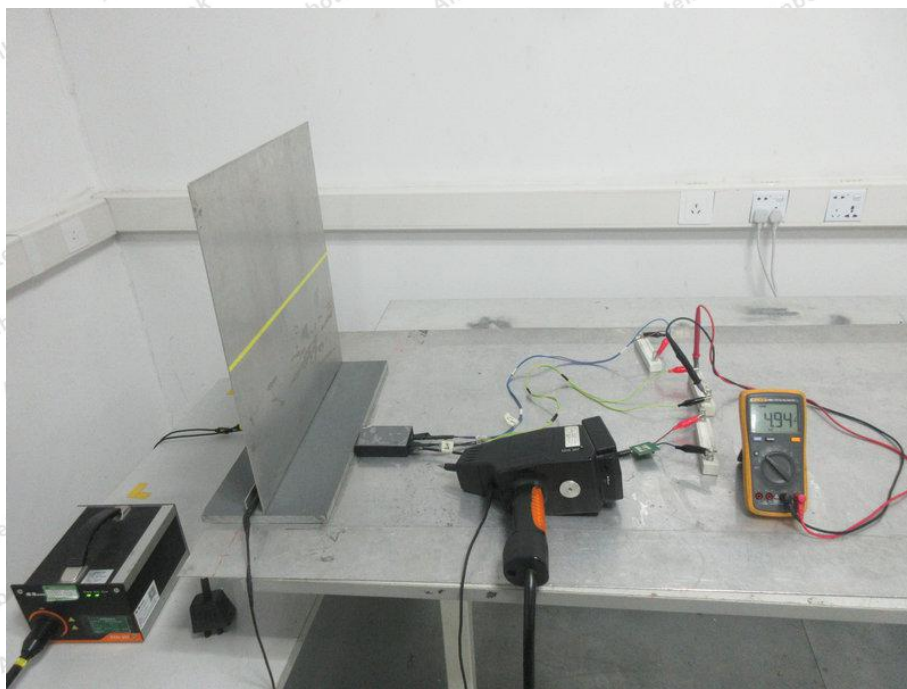


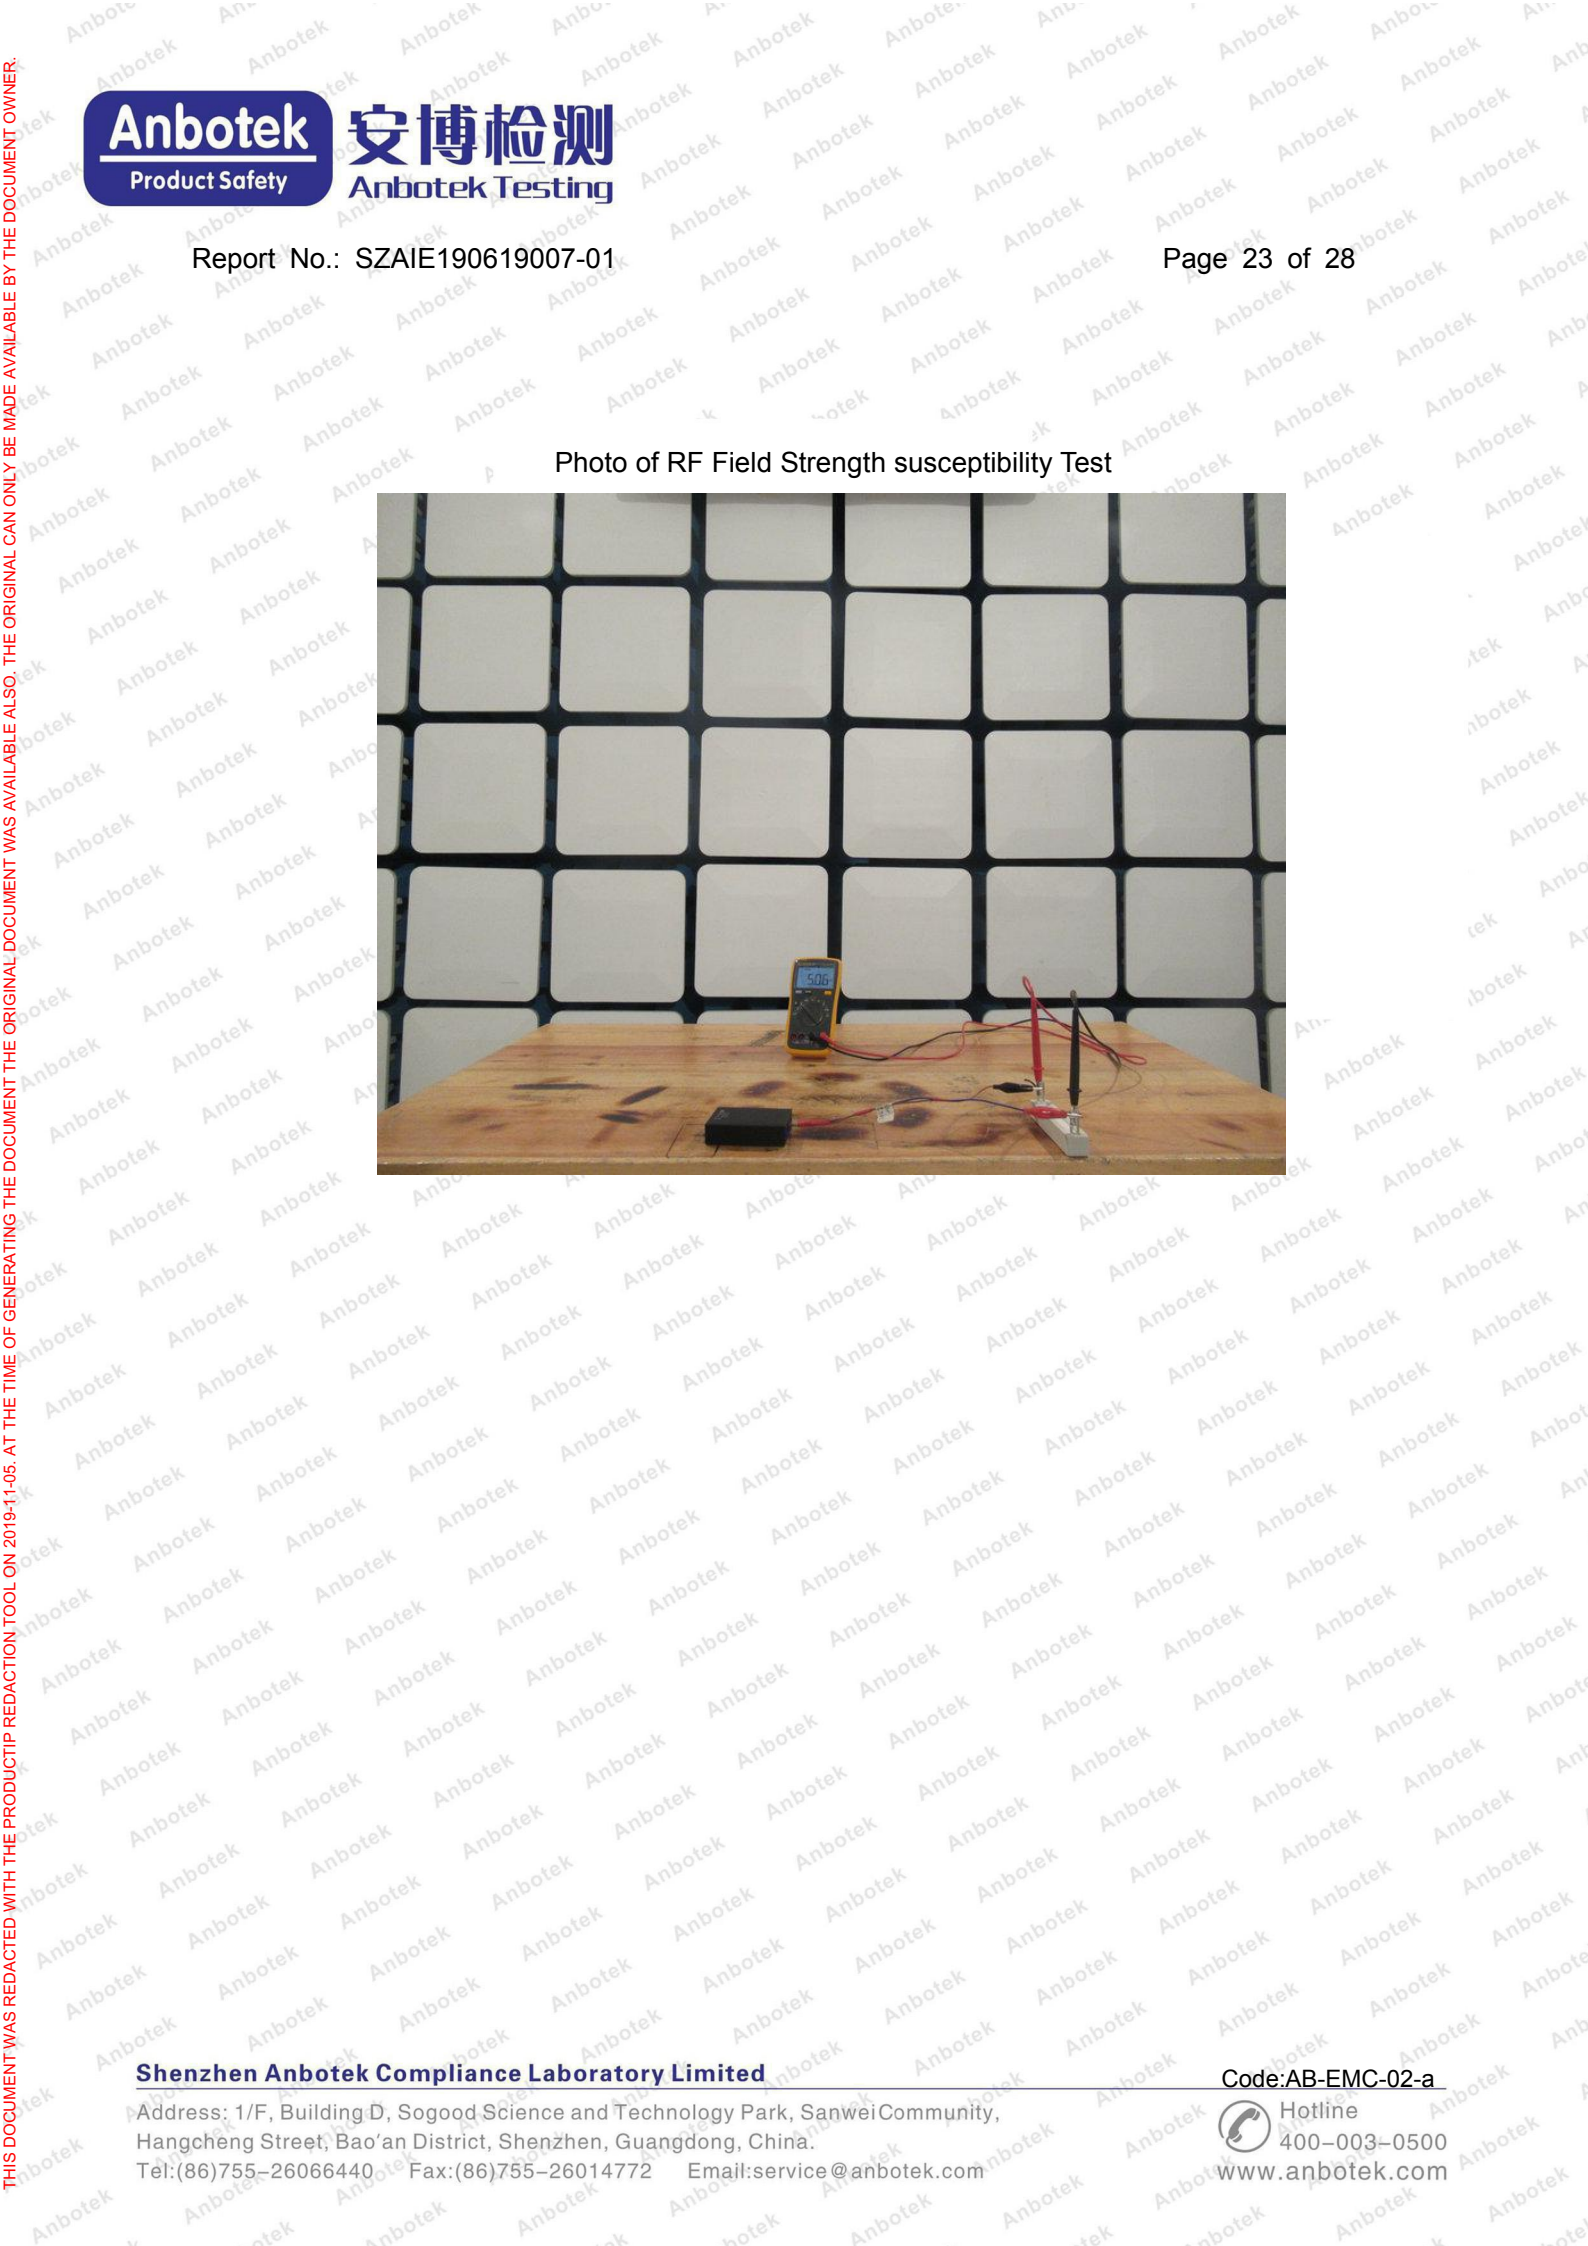



THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.

Photo of RF Field Strength susceptibility Test

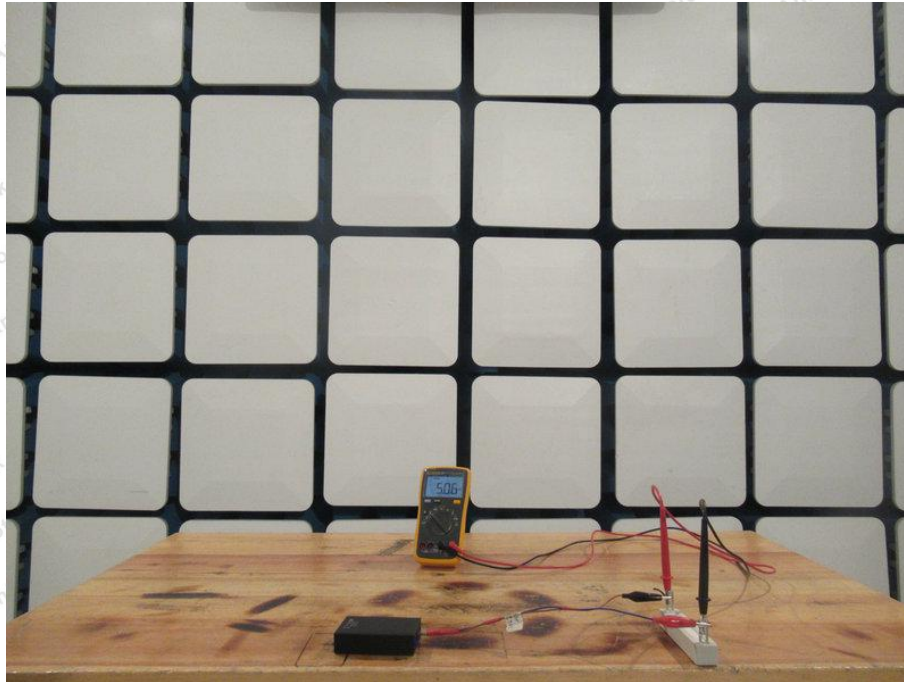



APPENDIX II -- EXTERNAL PHOTOGRAPH

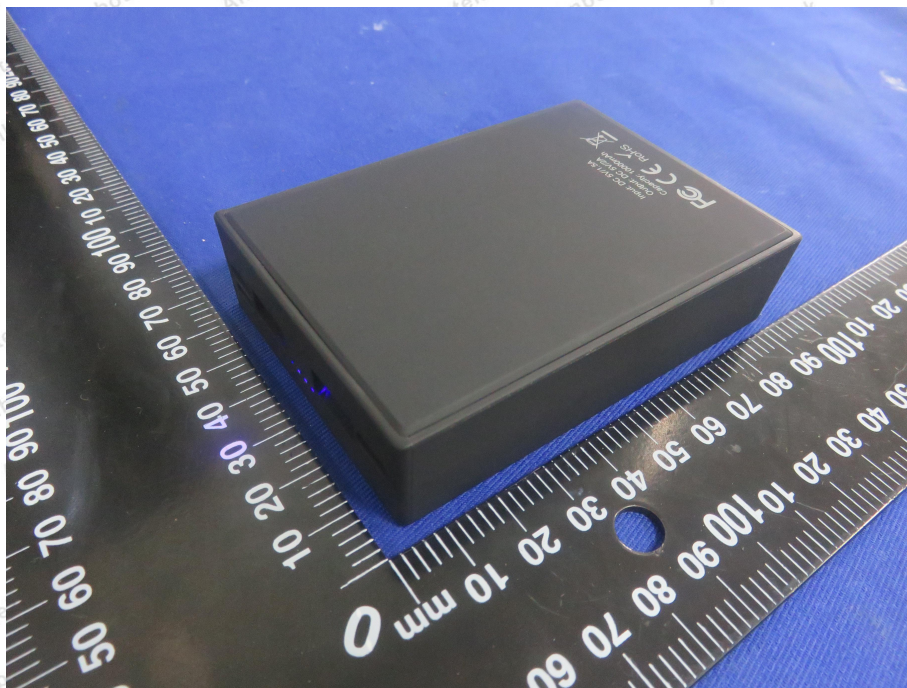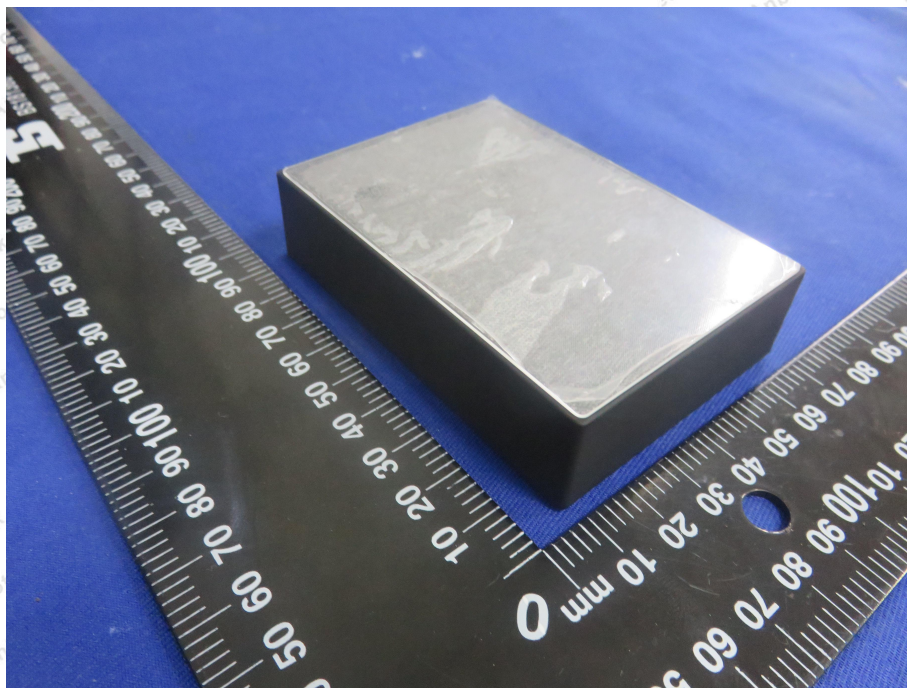


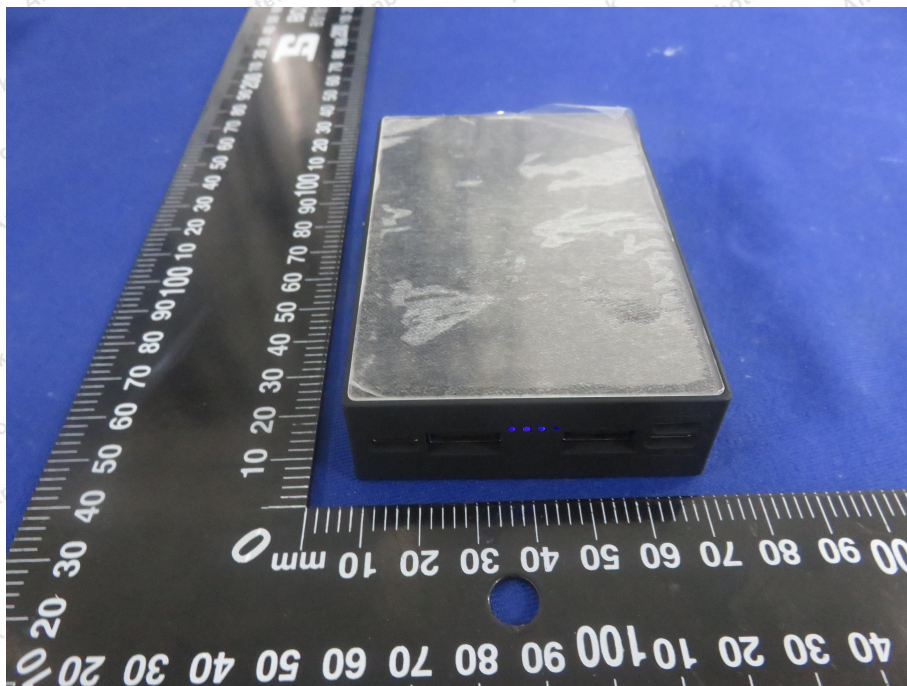

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2019-11-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.

APPENDIX III -- INTERNAL PHOTOGRAPH

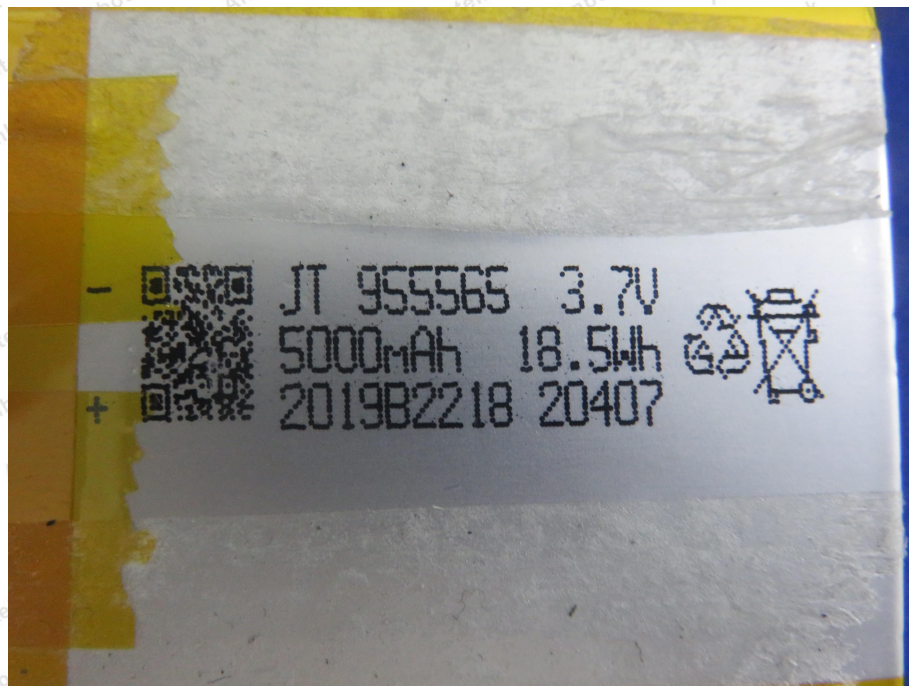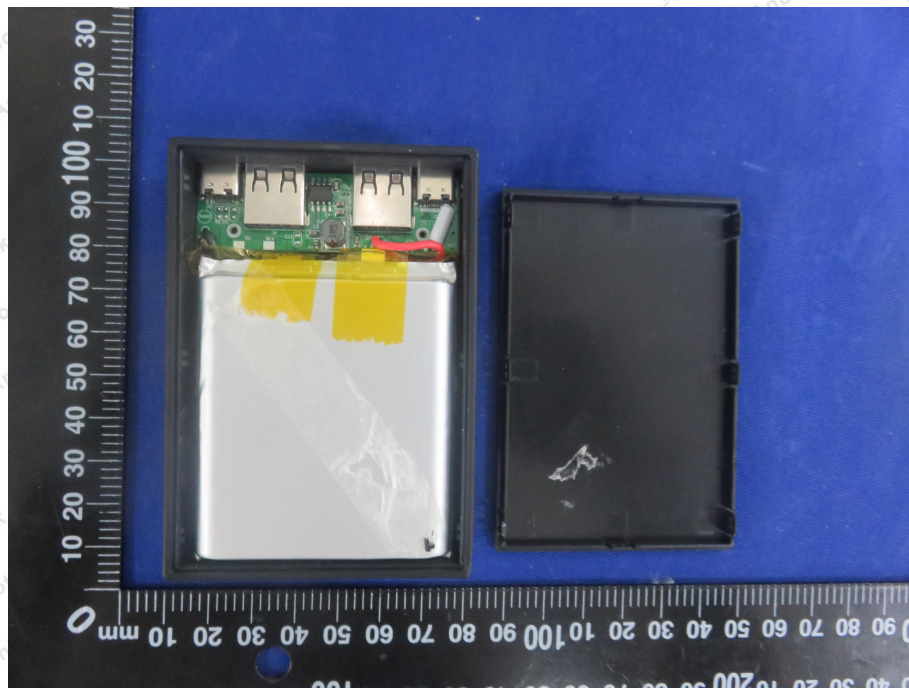

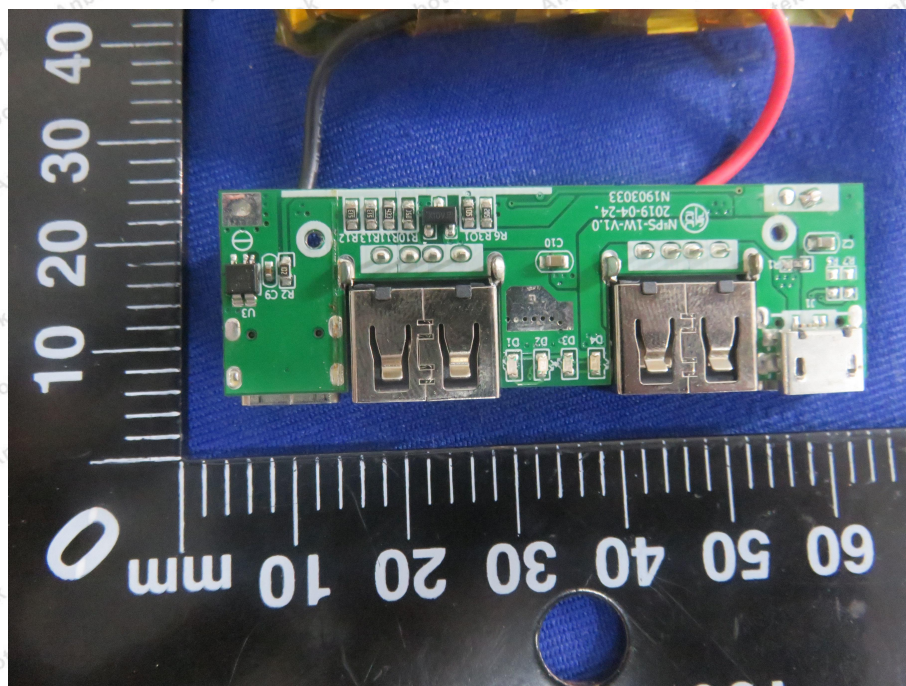

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----

