

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 1 of 34

TEST REPORT

**Draft ETSI EN 301 489-1 V2.2.1 (2019-03)/ ETSI EN 301 489-3 V2.1.1 (2019-03)/
EN 55032:2015/EN 55035:2017**

Applicant's name.....:

Address.....:

Test specification:Standard: **Draft ETSI EN 301 489-1 V2.2.1 (2019-03)/ ETSI EN 301 489-3
V2.1.1 (2019-03) /EN 55032:2015/EN 55035:2017**

TRF Originator: Shen Zhen UONE Test Co., LTD.

Test item description: 5000 mAh notebook with wireless
charging, black Trade Mark

Model/Type reference.....: P772.51

Listed Models: N/A

Hardware Version.....: V2.0

Software Version: V2.0

Rating: Input: DC 5V/2A
Output : DC 5V/2A
Wireless Output: DC 5V/1A

Result.....: **Positive**

Signed for and on behalf of Shen Zhen UONE Test Co., LTD.

Prepared by



Anna Li

Checked by



Nora Deng

Approved by



Pascal Shi

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 2 of 34

Equipment under Test : 5000 mAh notebook with wireless

charging, black Model /Type : P772.51

Listed Models : N/A

Applicant :

Address :

Manufacturer :

Address :

Test Result according to the standards on page 5:**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 3 of 34

Contents

目录

1. TES T STANDARDS.....	4
2. S U MMARY.....	4
21.General Remarks.....	4
22.Product Description.....	4
23.Equipment under Test Power supply system utilised.....	5
DC 5V From Adapter.....	5
24.Short description of the Equipment under Test (EUT).....	5
27.Performance level.....	6
28.Modifications.....	7
3. TES T ENVIRONM ENT.....	8
31.Address of the test laboratory.....	8
32.Environmental conditions.....	8
33.Configuration of Tested System.....	8
34.Test Description.....	9
35.Statement of the measurement uncertainty.....	9
36.Equipments Used during the Test.....	10
4. TES T CONDI T ION S AND RESULTS.....	12
4.1.REQUIREMENTS.....	12
5. Tes t Set-u p Photo s o f th e EUT.....	30
6. PHOTO S O F TH E EUT.....	31

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 4 of 34

1. TEST STANDARDS

The tests were performed according to following standards:

Draft ETSI EN 301 489-1 V2.2.1 (2019-03)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU

ETSI EN 301 489-3 V2.1.1 (2019-03)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

EN 55032:2015 Electromagnetic compatibility of multimedia equipment – Emission Requirements

EN 55035:2017 Electromagnetic compatibility of multimedia equipment – Immunity requirements

2. SUMMARY

21. General Remarks

Date of receipt of test sample	:	2019/09/02
Testing commenced on	:	2019/09/02
Testing concluded on	:	2019/09/10

22 Product Description

Name of EUT	5000 mAh notebook with wireless charging, black
Model(s) Number	P772.51
List Models	N/A
Difference description	N/A
Hardware version	V2.0
Software version	V2.0
Antenna Type	Coil Antenna

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 5 of 34

23. Equipment under Test Power supply system utilised

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V From Adapter

24. Short description of the Equipment under Test (EUT)

For details, refer to the user's manual of EUT.

25. EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

Test Item	
EMI	
Mode 1	Running
EMS	
Mode 1	Running

26. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- ☒ - supplied by the manufacturer
- ☐ - Supplied by the lab

- ☒ Adapter information
N/A

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 6 of 34

27. Performance level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test relative to a performance criteria defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product. Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access(hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution
- quality of data display and transmission
- quality of speech transmission

General performance criteria

- based on the used product standard
- based on the declaration of the manufacturer, requestor or purchaser
- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time. The equipment shall meet the minimum performance criteria as specified in the following clauses.

Performance table

Table 1: Performance criteria

Criteria	During test	After test
A	Shall operate as intended. May show degradation of performance (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 2). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2).
NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.		
NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.		

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 7 of 34

Performance criteria for Continuous phenomena applied to Transmitters (CT)

The performance criteria A shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK)

or Not ACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Transient phenomena applied to Transmitters (TT)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Continuous phenomena applied to Receivers (CR)

The performance criteria A shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Transient phenomena applied to Receivers (TR)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

28. Modifications

No modifications were implemented to meet testing criteria.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 8 of 34

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2014) and CISPR Publication 22.

3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C
Humidity: 30-60 %
Atmospheric pressure: 950-1050mbar

3.3 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	FCC ID
1	Adapter	HUAWEI	HW-051000CHQ	/

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 9 of 34

34. Test Description

ETSI EN 301 489-1/-3 requirements		
Radiated Emission	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1 EN 55032: 2015 Annex A.2	PASS
Conducted Emission(AC Mains)	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1	PASS
Conducted Emission(Telcommunication Ports)	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1 EN 55032: 2015 Annex A.3	N/A
Harmonic Current Emissions	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1 EN 61000-3-2: 2014	N/A
Voltage Fluctuations and Flicker	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1 EN 61000-3-3: 2013	N/A
Conducted Emission (telecommunication)	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.1	N/A
Electrostatic Discharge	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	PASS
RF Electromagnetic Field	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	PASS
Fast Transients Common Mode	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	N/A
RF Common Mode 0,15 MHz to 80 MHz	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	N/A
Transients and Surges	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	N/A
Voltage Dips and Interruptions	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	N/A
Surges, Line to Line and Line to Ground	Draft ETSI EN 301 489-1 V2.2.1 (2019-03) Clause 7.2	N/A

Remark: The measurement uncertainty is not included in the test result.

35. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Dongguan Dongdian Testing Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Dongguan Dongdian Testing Service Co.,Ltd is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 10 of 34

a coverage factor of $k=2$.

3.6. Equipments Used during the Test

CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	HKE-002	Dec. 27, 2018	Dec. 26, 2019	1 year
2	LISN	R&S	ENV216	HKE-029	Dec. 27, 2018	Dec. 26, 2019	1 year
3	EMI Test Receiver	R&S	ESCI-7	HKE-010	Dec. 27, 2018	Dec. 26, 2019	1 year

RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	roadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 27, 2018	Dec. 26, 2019	1 year
2	EMI Test Receiver	R&S	ESCI-7	HKE-010	Dec. 27, 2018	Dec. 26, 2019	1 year
3	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	Dec. 26, 2019	1 year
4	Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 27, 2018	Dec. 26, 2019	1 year
5	amplifier	EMCI	EMC051845SE	HKE-015	Dec. 27, 2018	Dec. 26, 2019	1 year
6	amplifier	Agilent	83051A	HKE-016	Dec. 27, 2018	Dec. 26, 2019	1 year
7	Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2018	Dec. 26, 2019	1 year

HARMONICS AND FILCK

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	harmonic flicker tester	California Instruments	5001ix	HKE-037	Dec. 27, 2018	Dec. 26, 2019	1 year

ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD device	Schloder	SESD 216	HKE-023	Dec. 27, 2018	Dec. 26, 2019	1 year

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 11 of 34

RS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Signal generator	Agilent	83630A	HKE-028	Dec. 27, 2018	Dec. 26, 2019	1 year
2	Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 27, 2018	Dec. 26, 2019	1 year
3	Power amplifier	R&S	NTWPA-1060040E	HKE-035	Dec. 27, 2018	Dec. 26, 2019	1 year
4	roadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 27, 2018	Dec. 26, 2019	1 year
5	Power amplifier	R&S	5225F	HKE-058	Dec. 27, 2018	Dec. 26, 2019	1 year

SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Full-featured immunity tester	HTEC	HV1P16T	HKE-017	Dec. 27, 2018	Dec. 26, 2019	1 year
2	Group pulse coupling clamp	HTEC	H3C	HKE-024	Dec. 27, 2018	Dec. 26, 2019	1 year

INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Integrated Conduction Sensitivity Test System	Schloder	CDG6000	HKE-033	Dec. 27, 2018	Dec. 26, 2019	1 year

PFMF

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Power frequency induction coil	HTEC Instruments Ltd.	HPFMF	HKE-049	Dec. 27, 2018	Dec. 26, 2019	1 year

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 12 of 34

4. TEST CONDITIONS AND RESULTS

4.1. REQUIREMENTS

4.1.1. Radiated Emission

LIMIT

Please refer to ETSI EN 301 489-1 Clause 8.2.3


The ancillary equipment shall meet the class B limits given in CENELEC EN 55032 [1], annex A tables A.4 and A.5.

Alternatively, for ancillary equipment intended to be used exclusively in an industrial environment or telecommunication centres, the class A limits given in CENELEC EN 55032 [1], annex A tables A.2 and A.3 may be used.

If EUT is also a FM Receiver, it shall meet CENELEC EN 55032 [3], annex A tables A.6

TEST CONFIGURATION

(a) Radiated Emission Test Set-Up, Frequency below 1000MHz

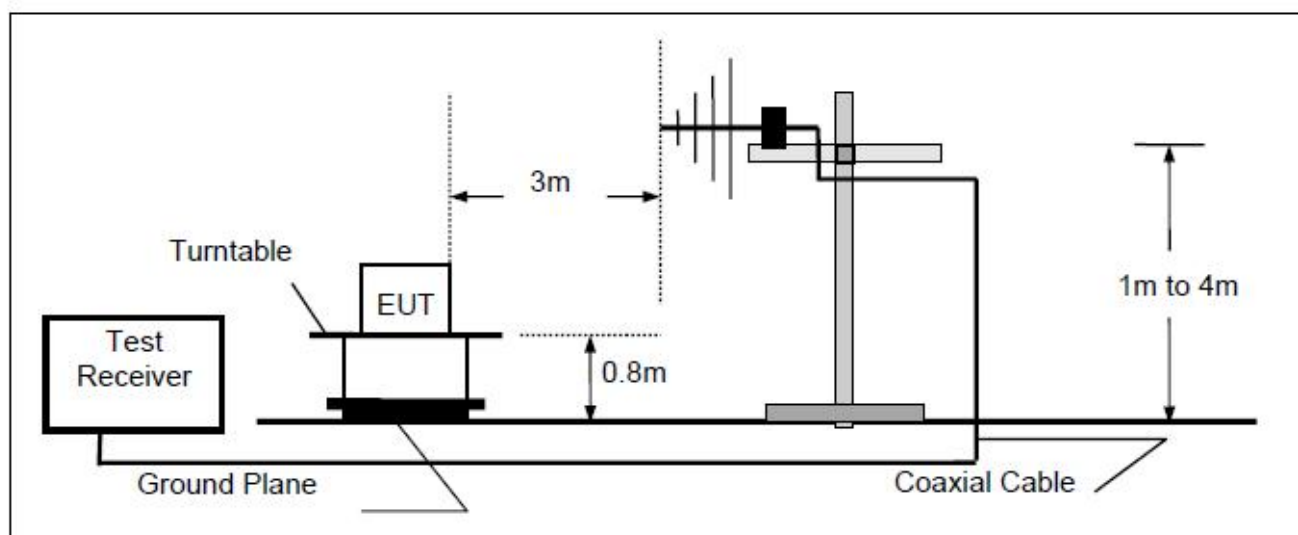

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report


Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 13 of 34

(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

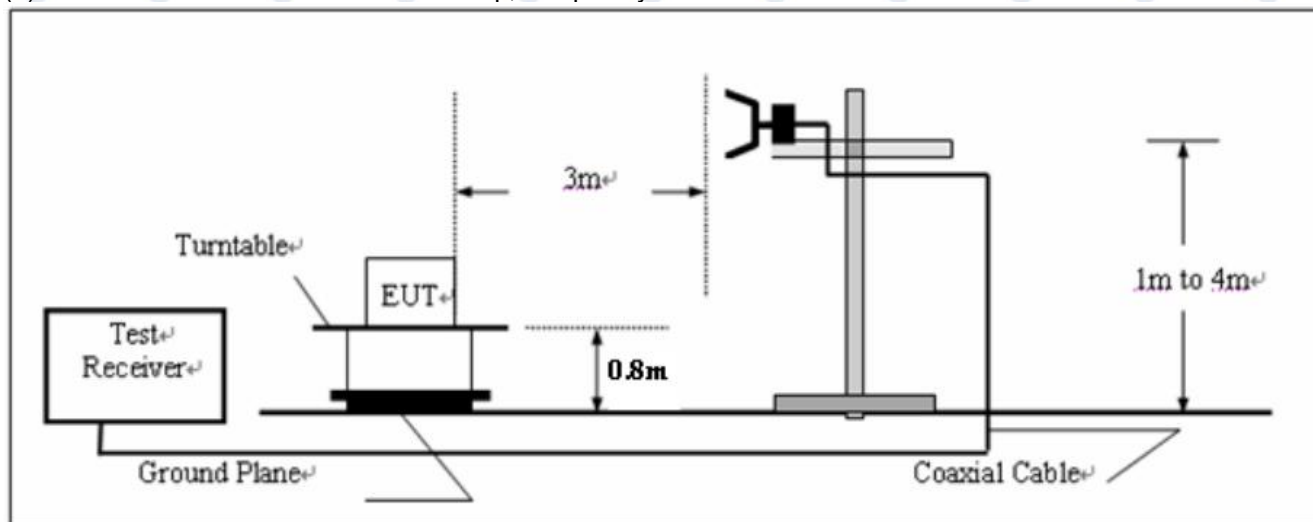

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 8.2.2 and The test method shall be in accordance with CENELEC EN 55032 [1], annex A.2. for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E


Query Password: QW0153

Date: Nov. 18, 2019

Page 14 of 34

TEST RESULTS

Below 1000MHz

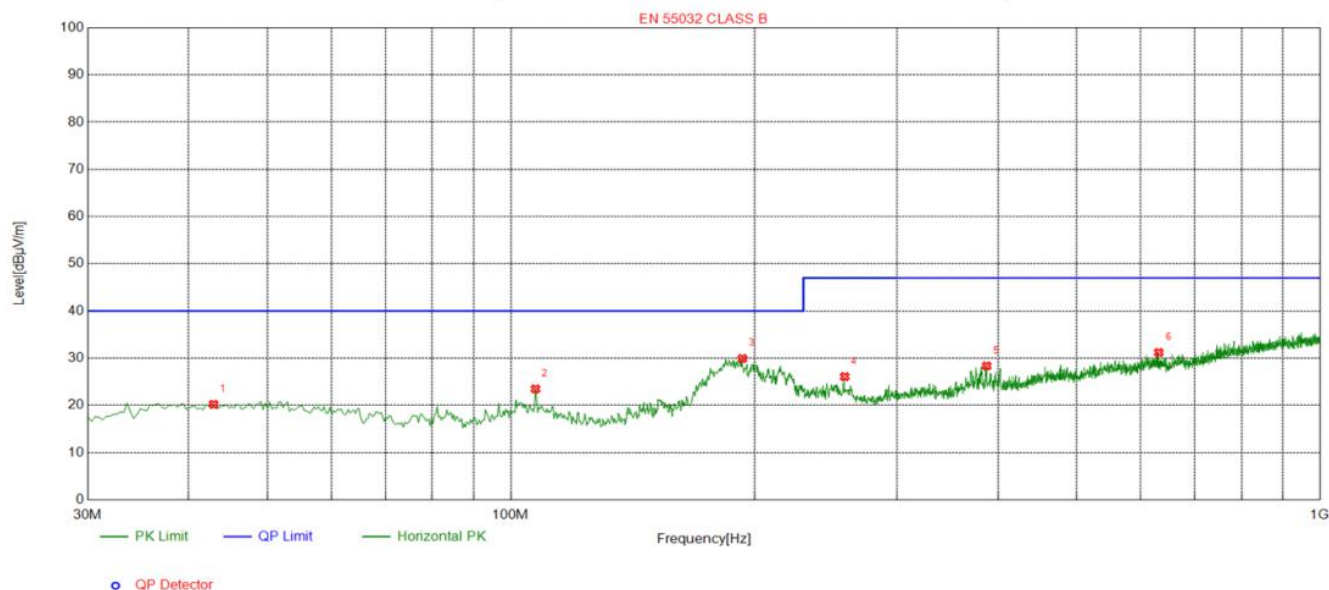

Suspected List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.9376	20.21	-14.02	40.00	19.79	100	316	Horizontal
2	107.302	23.48	-15.42	40.00	16.52	100	134	Horizontal
3	193.337	29.93	-15.69	40.00	10.07	100	270	Horizontal
4	258.672	26.08	-13.51	47.00	20.92	100	270	Horizontal
5	387.402	28.35	-10.70	47.00	18.65	100	38	Horizontal
6	632.247	31.20	-5.52	47.00	15.80	100	262	Horizontal

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.


Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 15 of 34

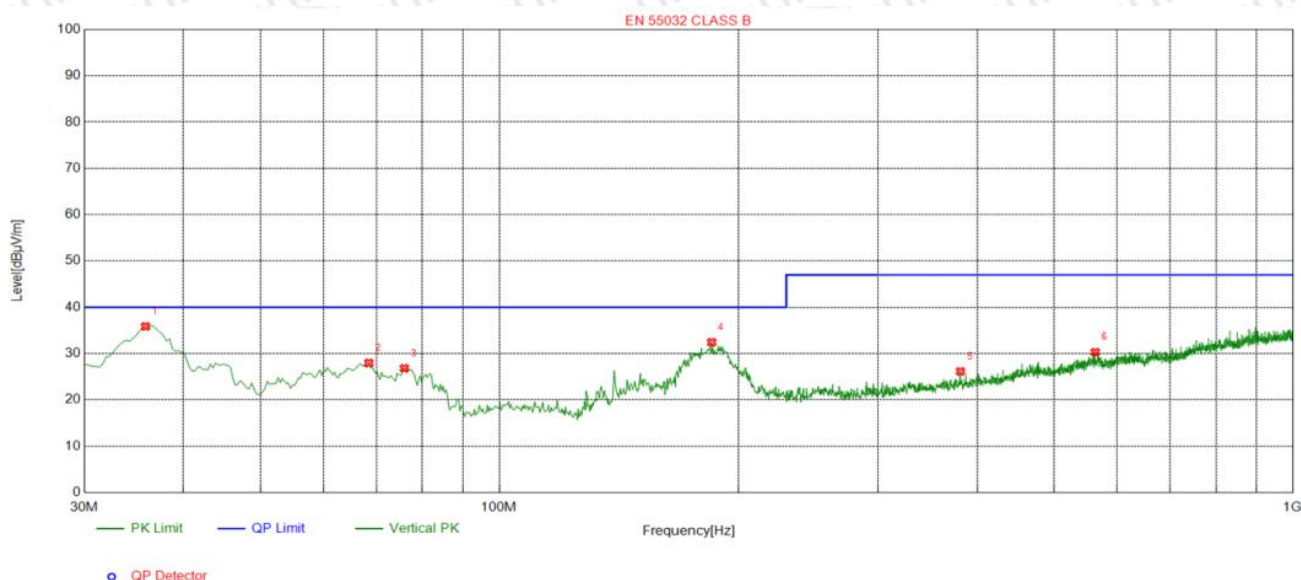

Suspected List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.8219	35.85	-15.88	40.00	4.15	100	320	Vertical
2	68.4895	27.97	-17.29	40.00	12.03	100	143	Vertical
3	75.9286	26.80	-18.74	40.00	13.20	100	80	Vertical
4	185.251	32.43	-16.41	40.00	7.57	100	175	Vertical
5	381.257	26.13	-10.80	47.00	20.87	100	358	Vertical
6	563.677	30.28	-6.58	47.00	16.72	100	355	Vertical

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission From 1 GHz to 6 GHz

EUT highest frequency is less than 108MHz, so this test report is not applicable.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 16 of 34

4.1.2 Conducted Emission (AC Mains)

LIMIT


Please refer to ETSI EN 301 489-1 Clause 8.4.3

The equipment shall meet the class B limits given in CENELEC EN 55032 [1], annex A table A.10.

Alternatively, for equipment intended to be used in an industrial environment or a telecommunication centre, the class A limits given in CENELEC EN 55032 [1], annex A table A.9 can be used.

If EUT is also a FM Receiver, it shall meet CENELEC EN 55032 [3], annex A tables A.13

TEST CONFIGURATION

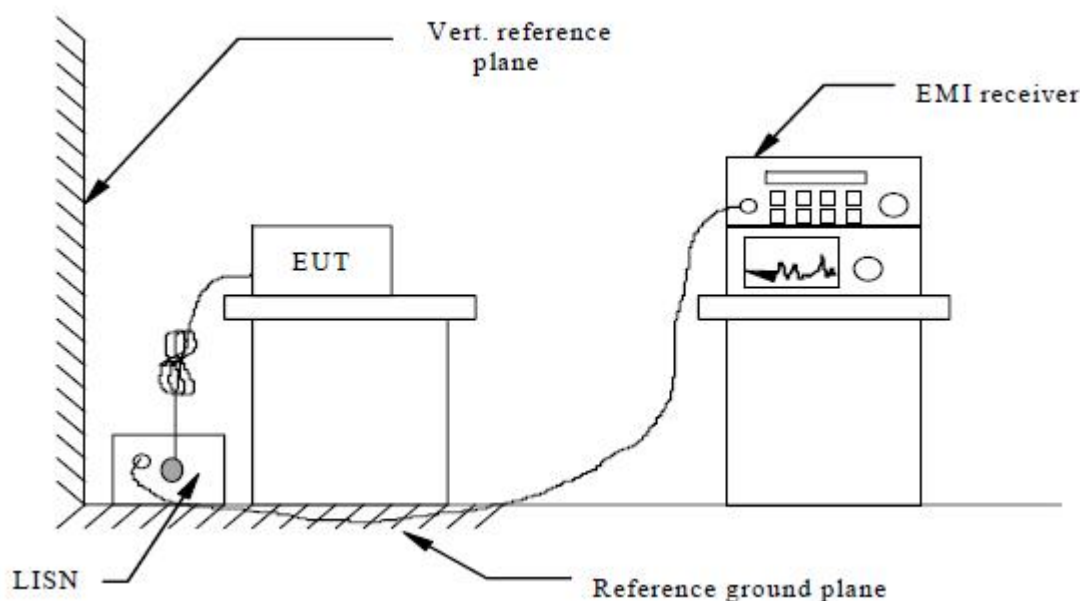

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 17 of 34


TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 8.4.3 and EN 55032 Clause 5 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

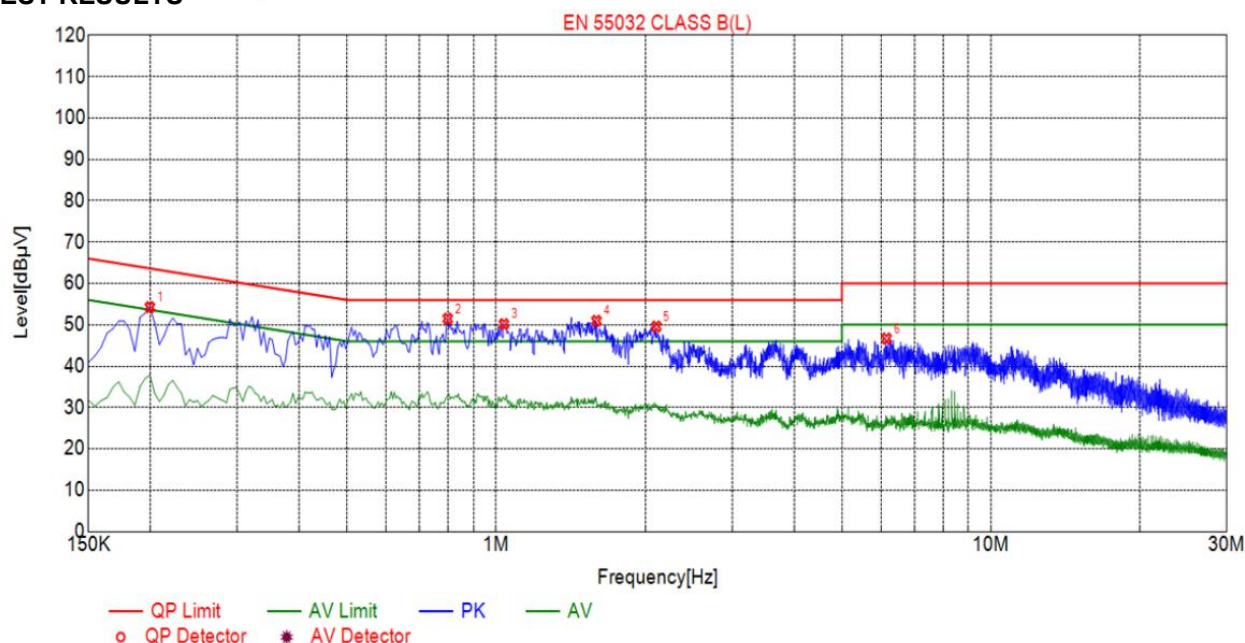

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1995	54.25	10.03	63.63	9.38	PK
2	0.7980	51.48	10.06	56.00	4.52	PK
3	1.0365	50.16	10.07	56.00	5.84	PK
4	1.5945	50.97	10.11	56.00	5.03	PK
5	2.1075	49.58	10.15	56.00	6.42	PK
6	6.1530	46.68	10.23	60.00	13.32	PK

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.


Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 18 of 34

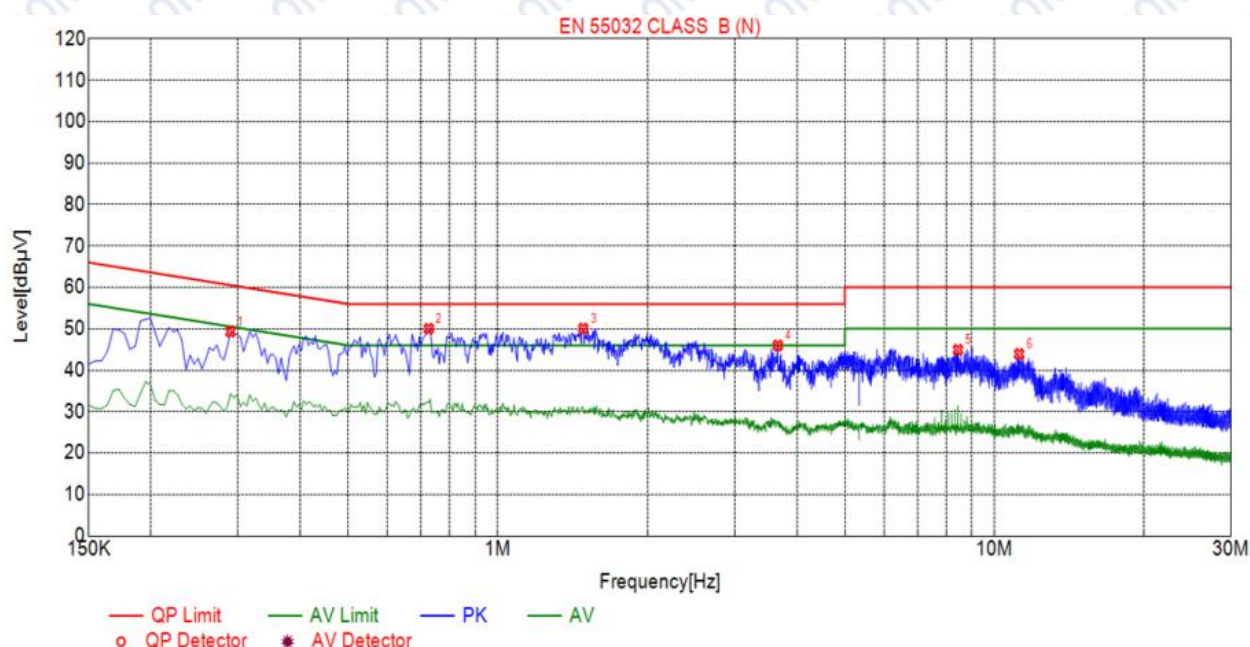

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.2895	49.33	10.03	60.54	11.21	PK
2	0.7260	50.01	10.06	56.00	5.99	PK
3	1.4865	50.07	10.10	56.00	5.93	PK
4	3.6645	45.97	10.25	56.00	10.03	PK
5	8.4525	44.93	10.13	60.00	15.07	PK
6	11.2200	43.91	10.01	60.00	16.09	PK

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 19 of 34

4.1.3. Conducted Emission (Telecommunication Ports)


LIMIT

Please refer to ETSI EN 301 489-1 Clause 8.7.3

The wired network ports shall meet the class B limits given in CENELEC EN 55032 [1], annex A table A.12.

Alternatively, for equipment intended to be used exclusively in an industrial environment or a telecommunication centre, the class A limits given in CENELEC EN 55032 [1] annex A table A.11 can be used.

TEST CONFIGURATION

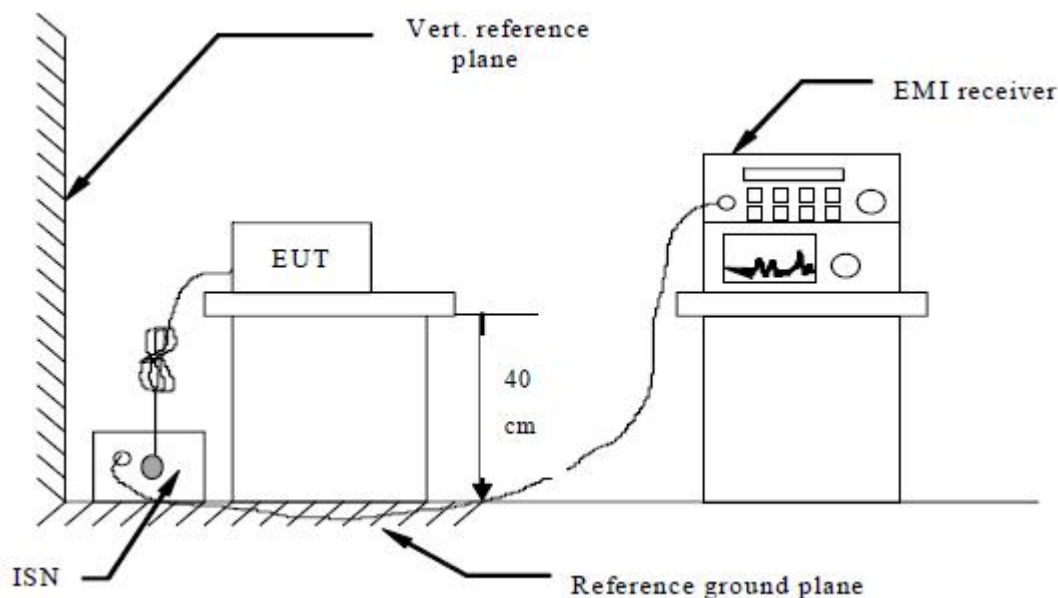

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 8.7.2 and The test method shall be in accordance with CENELEC EN 55032 [1], annex A.3. for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Not applicable

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 20 of 34

4.1.4. Harmonic Current Emission

LIMIT

Please refer to EN 61000-3-2

TEST CONFIGURATION

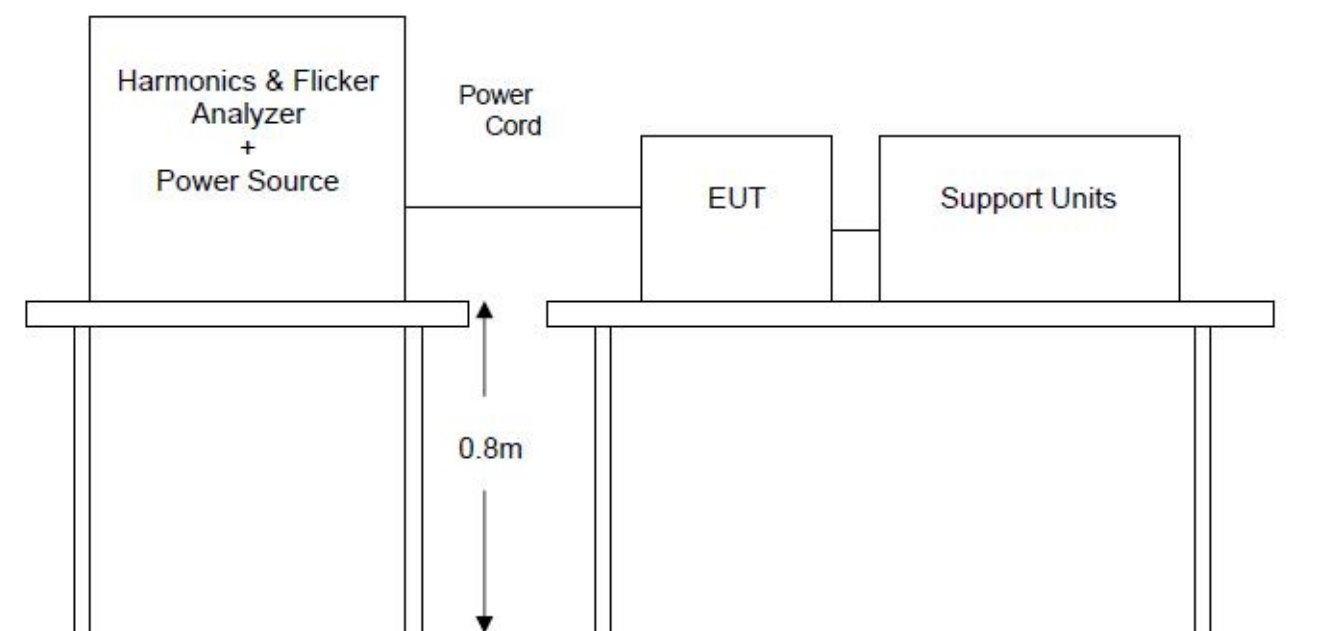

TEST PROCEDURE

Please refer to EN 61000-3-2 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 21 of 34

4.1.5. Voltage Fluctuation and Flicker

LIMIT

Please refer to EN 61000-3-3

TEST CONFIGURATION

Same as the configuration of the Harmonic Current Emission.

TEST PROCEDURE

Please refer to EN 61000-3-3 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

4.1.6. Electrostatic Discharge

LIMIT

Please refer to EN 61000-4-2

SEVERITY LEVELS OF ELECTROSTATIC DISCHARGE

Test level: Contact Discharge at $\pm 2\text{KV}, \pm 4\text{KV}$ Air Discharge at $\pm 2\text{KV}, \pm 4\text{KV}, \pm 8\text{KV}$

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special

Performance criterion: **B Test Configuration**

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report


Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 22 of 34

TEST CONFIGURATION

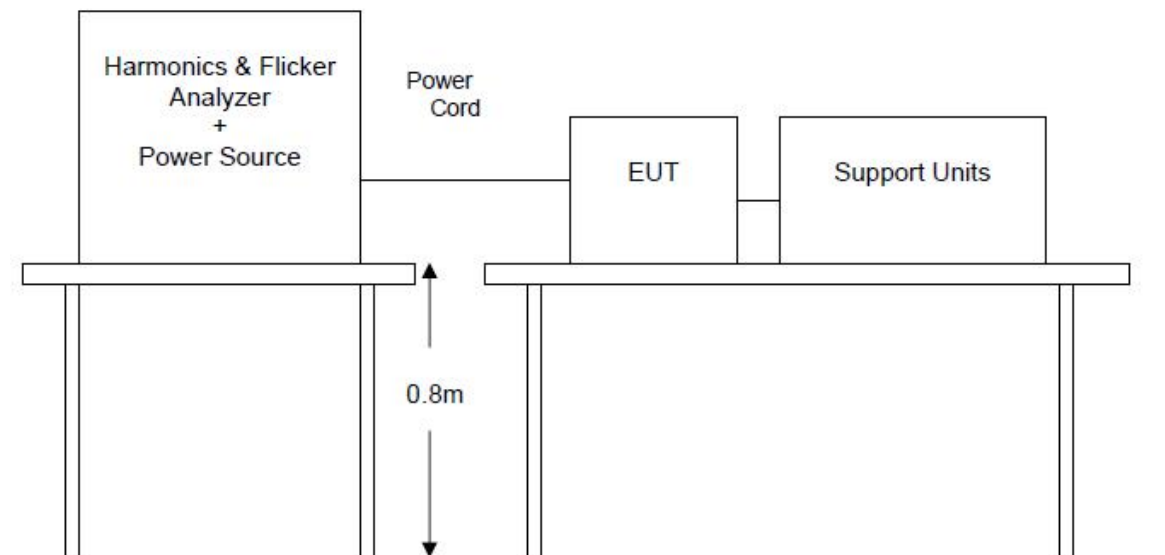

Test procedure

Please refer to ETSI EN 301 489-1 Clause 9.3.2 and EN 61000-4-2 for the measurement methods.

If EUT is also a FM Receiver, it shall refer to EN 55020:2007/A11:2011 Clause 5.9 for the measurement methods.

Test results

Contact Discharge:

The ESD generator is held perpendicular to the surface to which the discharge is applied and the tip of the discharge electrode touch the surface of EUT. Then turn the discharge switch. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

Air Discharge:

Air discharge is used where contact discharge can't be applied. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Indirect discharge for horizontal coupling plane:

At least 10 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT.

Indirect discharge for vertical coupling plane:

At least 10 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 23 of 34

Climatic conditions

- ambient temperature : 25℃
- relative humidity: 55%
- atmospheric pressure: 960 mbar

Description of the Electrostatic Discharges (ESD)

Point of Discharge	Applied Voltage (KV)	Total No. of Discharge (Each Point)	Results	Criteria Level	Remark
Air Test Point	±2	20	A	B	-
	±4	20	A	B	-
	±8	20	A	B	-
Contact Discharge Test Points	±2	50	A	B	
	±4	50	A	B	
VCP (4 sides)	±2	50	A	B	-
	±4	50	A	B	-
HCP (4 sides)	±2	50	A	B	-
	±4	50	A	B	-

The requirements are **Fulfilled**Performance Criterion: **B**

Remarks: The ancillary equipment's specification for an acceptable level of performance or degradation of performance during and/or after the ESD tests.

Description of Discharge Point

Contact Discharge		Air Discharge	
○	Metallic Screws	○	Plastic Screws
○	Metallic Case	●	Plastic Case(gap)
●	Metallic Connect ports	●	Plastic Connect Ports
●	Metallic Junctions	●	Plastic Junctions
○	Others (Antenna Port)	○	Others

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 24 of 34

4.1.7. RF Electromagnetic Field

LIMIT

Please refer to EN 61000-4-3

Test Configuration

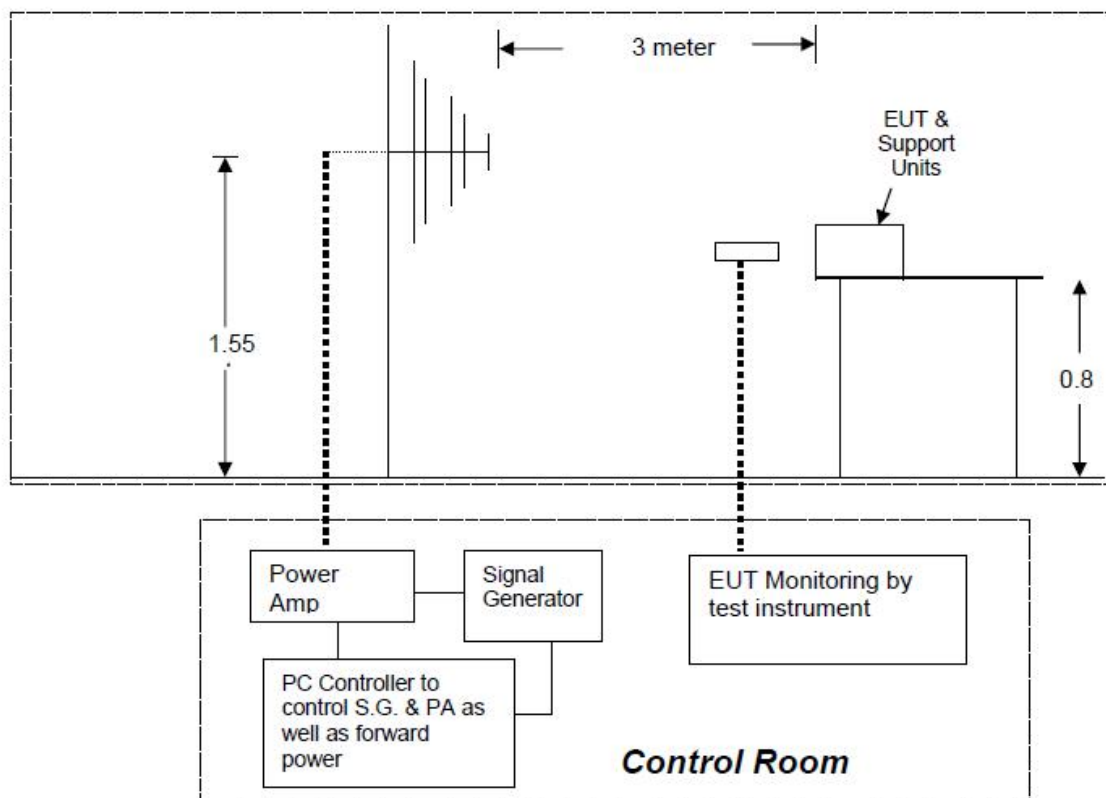

Test Levels of RF Electromagnetic Field

Test level: RF Field Strength: 3V/m

Level	RF Field Strength(V/m)
1	1
2	3
3	10
X	Special

Performance criterion: **A TEST PROCEDURE**

Please refer to ETSI EN 301 489-1 Clause 9.2.2 and EN 61000-4-3 for the measurement methods.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 25 of 34

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Result of Final Tests (Operating Mode & Standby (Receiving) Mode)

	q. Range (MHz)	Field	Modulation	Polarity	Position	Mode	Result (Pass/Fail)
1	80-1000	3V/m	Yes	H / V	Front	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Front		Pass
2	80-1000	3V/m	Yes	H / V	Right	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Right		Pass
3	80-1000	3V/m	Yes	H / V	Back	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Back		Pass
4	80-1000	3V/m	Yes	H / V	Left	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Left		Pass

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 26 of 34

4.1.8. Fast Transients Common Mode

LIMIT

Please refer to EN 61000-4-4

TEST CONFIGURATION

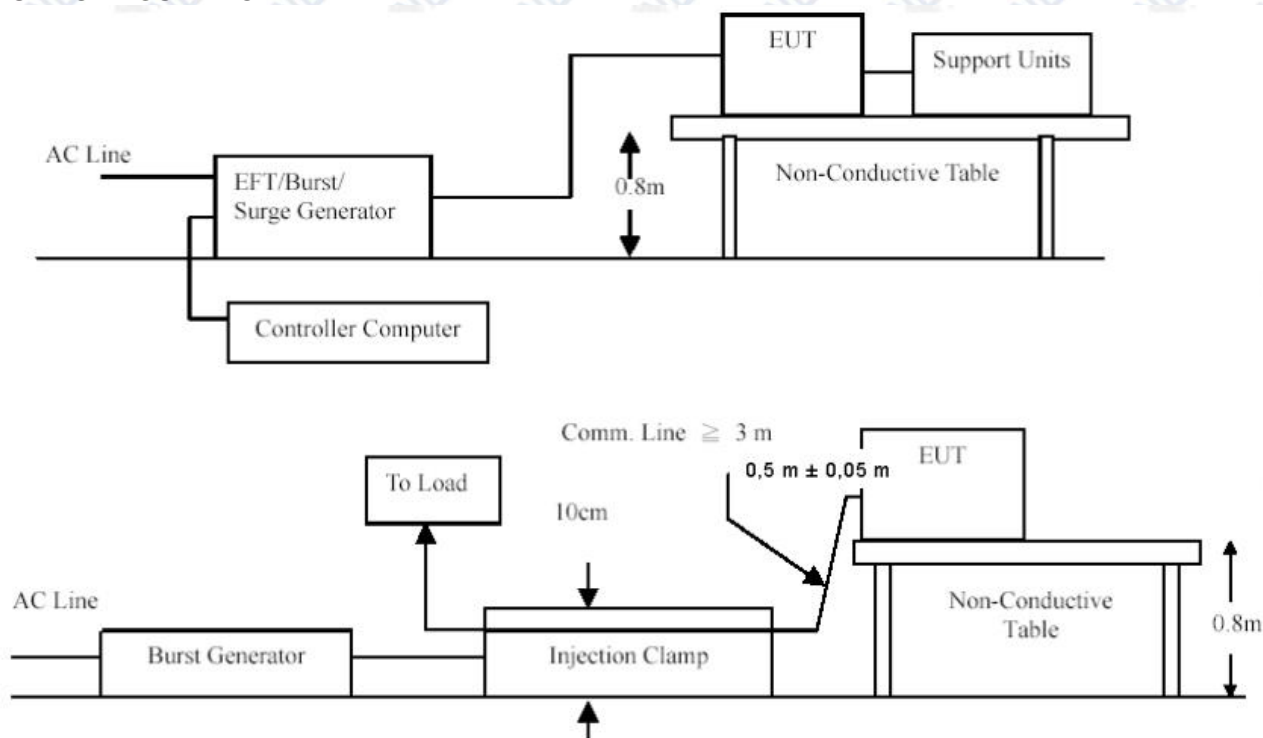

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.4.2 and EN 61000-4-4 for the measurement methods.

If EUT is also a FM Receiver, it shall refer to EN 55020:2007/A11:2011 Clause 5.6 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 27 of 34

4.19. Surges, Line to Line and Line to Ground

LIMIT

Please refer to EN 61000-4-5

TEST CONFIGURATION

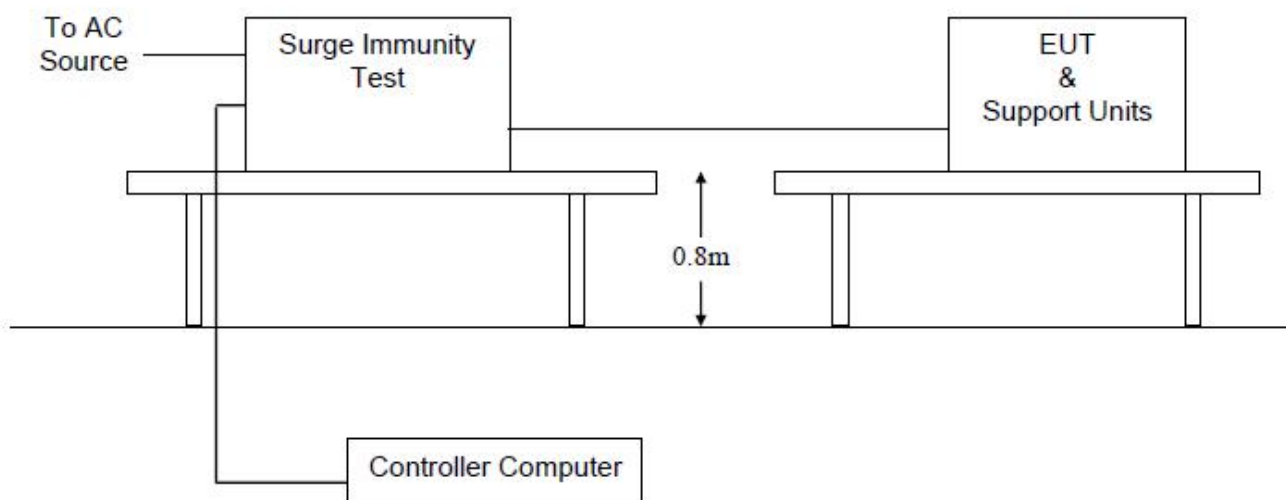

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.4.2 and EN 61000-4-5 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 28 of 34

4.1.10. RF- Common Mode 0.15MHz to 80MHz

LIMIT

Please refer to EN 61000-4-6

TEST CONFIGURATION

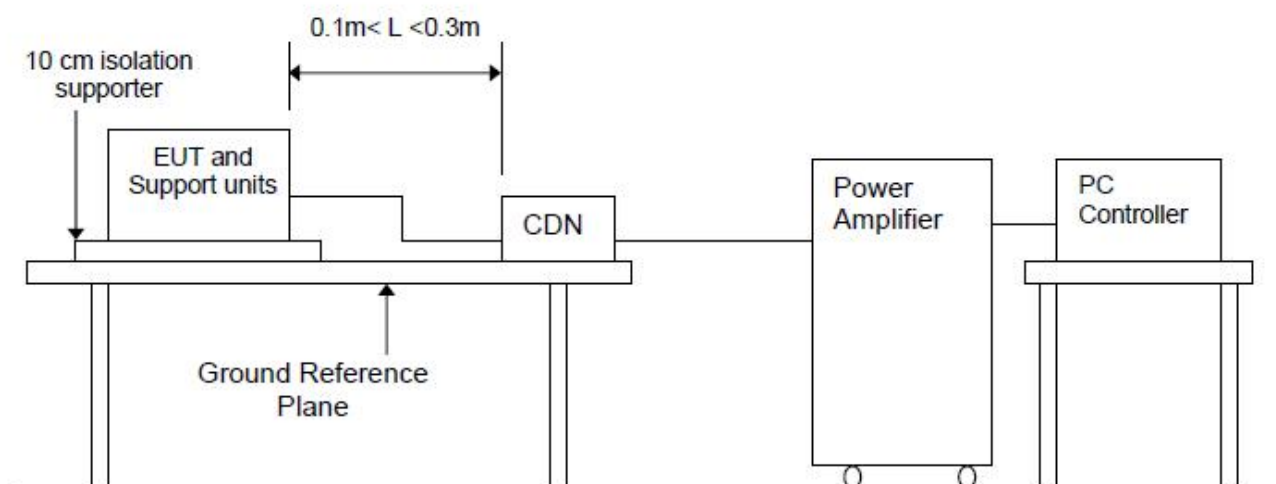

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.5.2 and EN 61000-4-6 for the measurement methods.

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019


Page 29 of 34

4.1.11. Voltage Dips and Interruptions

LIMIT

Please refer to EN 61000-4-11

TEST CONFIGURATION

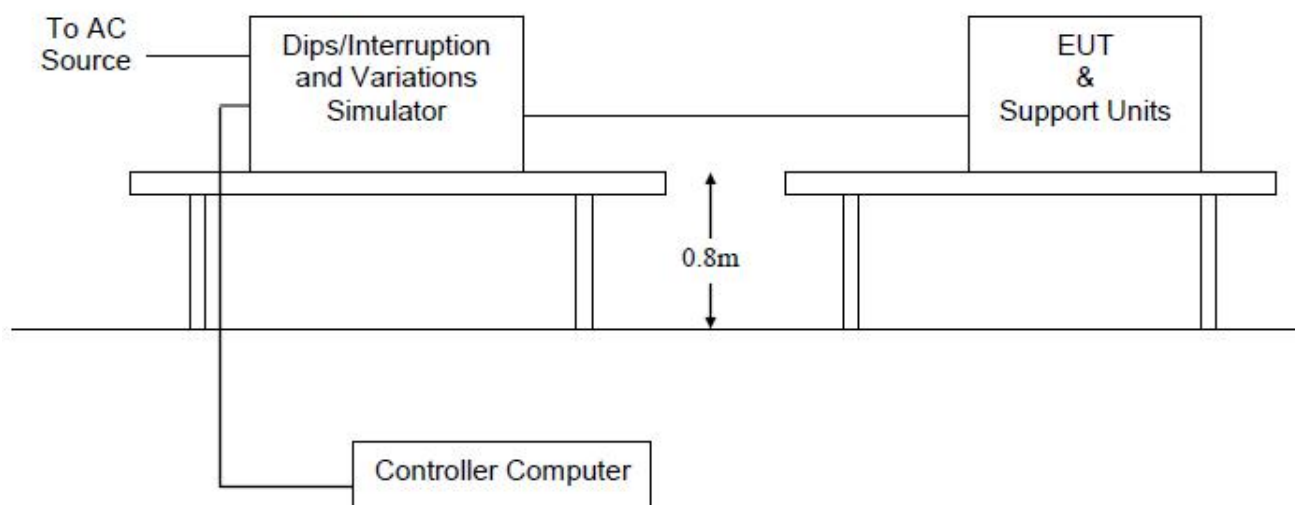

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.7.2 and EN 61000-4-11 for the measurement methods

Climatic conditions

- ambient temperature : 25 °C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT test by DC power supply, so this test report is not applicable.

Remark: The test result(s) is(are) copied from the test report No. HK1909022180-1EH, dated 2019/09/10.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 30 of 34

5. Test Set-up Photos of the EUT

Radiated Emission (30MHz-1GHz)



Conducted Emission



This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 31 of 34

Electrostatic Discharge



6. PHOTO S O F T H E EUT



This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.


Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 32 of 34

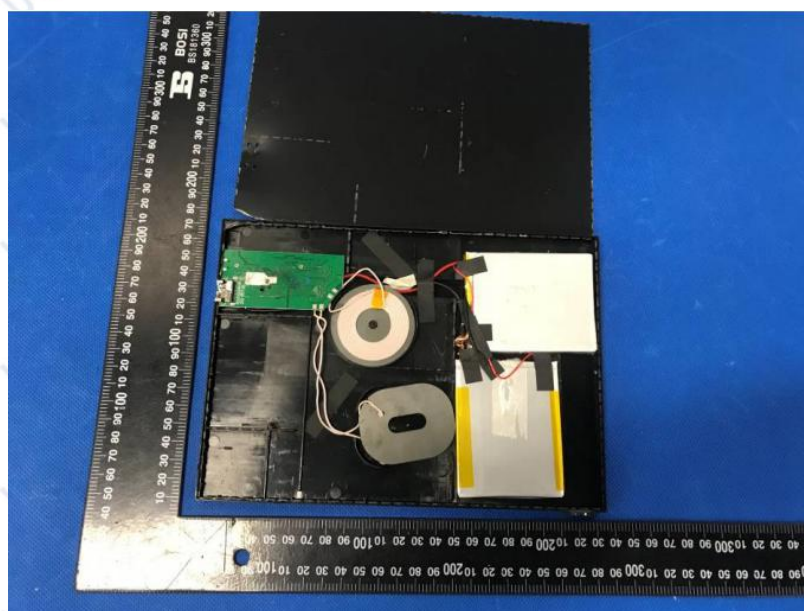

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.



Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 33 of 34

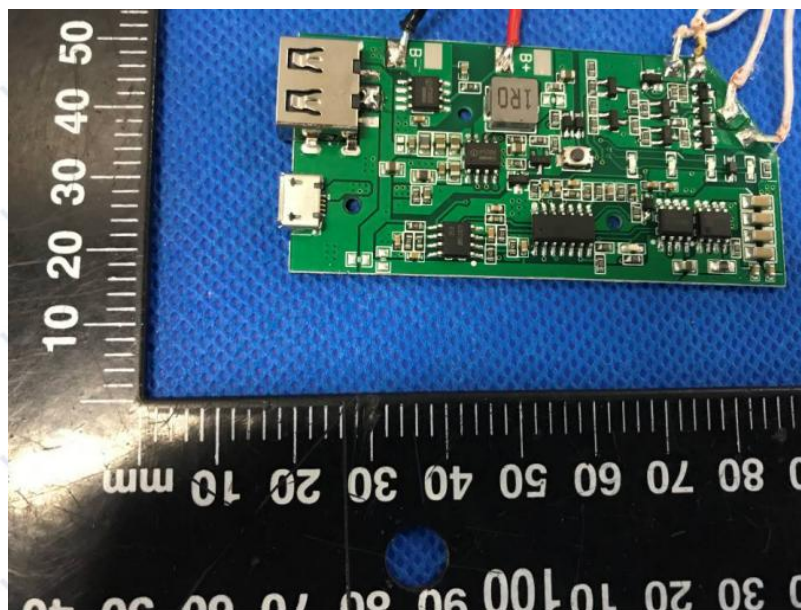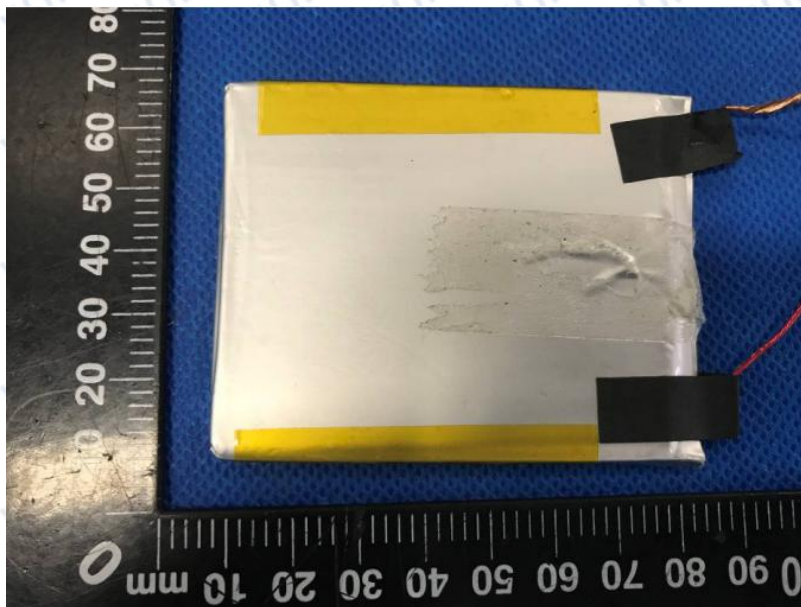

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.


Test Report

Report No.: U01501191111033-2E

Query Password: QW0153

Date: Nov. 18, 2019

Page 34 of 34

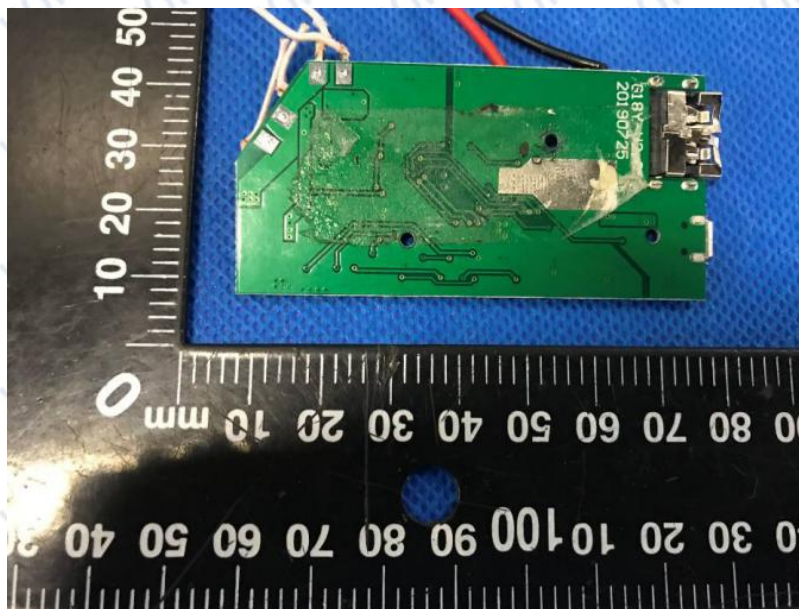

End of Report

This report is considered invalidated without the Special Seal for Inspection of the UONE, This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample tested. Without written approval of UONE, this report shall not be copied and published as advertisement.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.