

HEALTH TEST REPORT

For

Dongguan Xing Yue Electronic co., Ltd

Outdoor 10W Wireless Charging Solar Powerbank

Test Model: XO-9771

Prepared for : Dongguan Xing Yue Electronic co., Ltd
Address : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan
City, Guang Dong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C, Juji
Industrial Park, Yabianxueziwei, Shajing Street, Bao' an District,
Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 04, 2020
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 04, 2020 ~ March 12, 2020
Date of Report : March 13, 2020



HEALTH TEST REPORT**EN 62311: 2008**

Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)

Report Reference No.: LCS200102107AEC

Date of Issue.....: March 13, 2020

Testing Laboratory Name: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address.....: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao' an District, Shenzhen, Guangdong, China

Testing Location/ Procedure: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name.....: Dongguan Xing Yue Electronic co., Ltd**

Address.....: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China

Test Specification

Standard: EN 62311: 2008

Test Report Form No.: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Outdoor 10W Wireless Charging Solar Powerbank

Trade Mark: N/A

Test Model: XO-9771


Ratings: Battery Capacity: 3.7V/10000mAh

Type-C Input: 5V=2.4A, 9V=1.67A

USB Output: 5V=2.4A

Type-C Input: 5V=2.4A


Wireless Output: 5W/7.5W/10W

Result: Positive**Compiled by:**


Jaydan Zhuo/ Administrators

Supervised by:


Jin Wang / Technique principal

Approved by:


Gavin Liang/ Manager

HEALTH --TEST REPORT**Test Report No. : LCS200102107AEC**March 13, 2020
Date of issue

Test Model..... : XO-9771

EUT..... : Outdoor 10W Wireless Charging Solar Powerbank

Applicant..... : Dongguan Xing Yue Electronic co., LtdAddress..... : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan
.. City, Guang Dong, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Dongguan Xing Yue Electronic co., LtdAddress..... : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan
City, Guang Dong, China

Telephone..... : /

Fax..... : /

Factory..... : Dongguan Xing Yue Electronic co., LtdAddress..... : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan
City, Guang Dong, China

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Report Version	Issue Date	Revisions	Revised By
000	March 13, 2020	Initial Issue	Gavin Liang

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT : Outdoor 10W Wireless Charging Solar Powerbank
 Test Model : XO-9771
 Hardware Version : /
 Software Version : /
 Operating Frequency : 110.0~205.0KHz
 Modulation Type : MSK
 Antenna Type : Coil Antenna
 Battery Capacity: 3.7V/10000mAh
 Type-C Input: 5V $\overline{=}$ 2.4A, 9V $\overline{=}$ 1.67A
 Ratings : USB Output: 5V $\overline{=}$ 2.4A
 Type-C Input: 5V $\overline{=}$ 2.4A
 Wireless Output: 5W/7.5W/10W

1.2. Objective

According to its specifications, the EUT must comply with the requirements of the following standards:

EN 62311: 2008 –Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)

1.3. Test Methodology

All measurements contained in this report were conducted with EN 62311: 2008.

1.4. Description of Test Facility

FCC Registration Number is 254912.
 Industry Canada Registration Number is 9642A-1
 EMSD Registration Number is ARCB0108.
 UL Registration Number is 100571-492.
 TUV SUD Registration Number is SCN1081.
 TUV RH Registration Number is UA 50296516-001.
 NVLAP Accreditation Code is 600167-0.
 FCC Designation Number is CN5024.
 CAB identifier: CN0071.

1.5. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	ADAPTER for Notebook	ADLX65YCC 3A	--	CE
Lenovo	Notebook	TP00094A	--	CE
MIUI	Mobile Phone	MI9	--	CE

1.6. External I/O

I/O Port Description	Quantity	Cable
Micro USB Port	1	N/A
USB Port	2	N/A

1.7. Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

1.8. Measurement Uncertainty(95% confidence levels, k=2)

Test Item		Uncertainty
Radio Frequency	:	0.9×10^{-4}
Total RF Power, Conducted	:	1.0 dB
RF Power Density, Conducted	:	1.8 dB
Spurious Emissions, Conducted	:	1.8 dB
All Emissions, Radiated	:	3.1 dB
Temperature	:	0.5°C
Humidity	:	1 %
DC And Low Frequency Voltages	:	1 %

2. HUMAN EXPOSURE TO THE ELECTROMAGNETIC FIELDS

2.1 Basic Restrictions Reference levels

Council Recommendation 1999/519/EC Annex III

Basic restrictions for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

Frequency range	Magnetic flux density (mT)	Current density (Ma/m ²) (rms)	Whole body average SAR (W/kg)	Localised SAR (head and trunk) (W/kg)	Localised SAR (limbs) (W/kg)	Power density (W/m ²)
0Hz	40	-	-	-	-	-
>0-1Hz	-	8	-	-	-	-
1-4Hz	-	8/f	-	-	-	-
4-1000Hz	-	2	-	-	-	-
1000Hz-100kHz	-	f/500	-	-	-	-
100kHz-10MHz	-	f/500	0.08	2	4	-
10MHz-10GHz	-	-	0.08	2	4	-
10-300GHz	-	-	-	-	-	10

Note:

1. f is the frequency in Hz.
2. The basic restriction on the current density is intended to protect against acute exposure effects on central nervous system tissues in the head and trunk of the body and includes a safety factor. The basic restrictions for ELF fields are based on established adverse effects on the central nervous system. Such acute effects are essentially instantaneous and there is no scientific justification to modify the basic restrictions for exposure of short duration. However, since the basic restriction refers to adverse effects on the central nervous system, this basic restriction may permit higher current densities in body tissues other than the central nervous system under the same exposure conditions.
3. Because of electrical inhomogeneity of the body, current densities should be averaged over a cross section of 1cm² perpendicular to the current direction.
4. For frequencies up to 100 kHz, peak current density values can be obtained by multiplying the rms value by $\sqrt{2}$ (=1.414). For pulses of duration t_p the equivalent frequency to apply in the basic restrictions should be calculated as $f=1/(2t_p)$
5. For frequencies up to 100kHz and for pulsed magnetic fields, the maximum current density associated with the pulses can be calculated from the rise/fall times and the maximum rate of change of magnetic flux density. The induced current density can then be compared with the appropriate basic restriction.
6. All SAR values are to be averaged over any six-minute period.
7. Localised SAR averaging mass is any 10g of contiguous tissue; the maximum SAR so obtained should be the value used for the estimation of exposure. These 10g of tissue are intended to be a mass of contiguous tissue with nearly homogeneous electrical properties. In specifying a contiguous mass of tissue, it is recognised that this concept can be used in computational dosimetry but may present difficulties for direct physical measurements. A simple geometry such as cubic tissue mass can be used provided that the calculated dosimetric quantities have conservation values relative to the exposure guidelines.

8. For pulses of duration t_p the equivalent frequency to apply in the basic restrictions should be calculated as $f = 1/(2t_p)$. Additionally, for pulsed exposures, in the frequency range 0,3 to 10GHz and for localised exposure of the head, in order to limit and avoid auditory effects caused by thermoelastic expansion, an additional basic restriction is recommended. This is that SA should not exceed 2mJ kg⁻¹ averaged over 10g of tissue.

2.2 Reference Levels

Council Recommendation 1999/519/EC Annex III

Reference levels for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density Seq (W/m ²)
0-1Hz	-	$3,2 \times 10^4$	4×10^4	-
1-8Hz	1000	$3,2 \times 10^4 / f^2$	$4 \times 10^4 / f^2$	-
8-25Hz	1000	4000/f	5000/f	-
0.025Hz-0,8kHz	250/f	4/f	5/f, 6,25	-
0,8-3kHz	250/f	5	6,25	-
3-150kHz	87	5	6,25	-
0,15-1MHz	87	0.73/f	0,92/f	-
1-10MHz	$87/f^{1/2}$	0.73/f	0,92/f	-
10-400MHz	28	0.073	0,092	2
400-2000MHz	$1,375 f^{1/2}$	$0,0037 f^{1/2}$	$0,0046 f^{1/2}$	f/200
2-300GHz	61	0,16	0,20	10

Note:

1. As indicated in the frequency range column.
2. For frequencies between 100kHz and 10GHz, Seq, E2, H2 and B2 are to be averaged over any six-minute period.
3. For frequencies exceeding 10GHz, Seq, E2, H2 and B2 are to be averaged over any 68/.1.05-minute period (.in GHz).
4. No E-field value is provided for frequencies <1Hz, which are effectively static electric fields. For most people the annoying perception of surface electric charges will not occur at field strengths less than 20kV/m. Spark discharges causing stress or annoyance should be avoided.

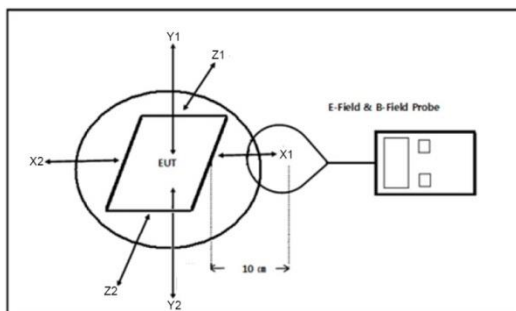
3. RF EXPOSURE EVALUATION

3.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
1	Exposure Level Tester	Narda	ELT-400	N-0713	2019-04-02	2020-04-01
2	B-Field Probe	Narda	ELT-400	M-1154	2019-04-11	2020-04-10

3.2. Block Diagram of Test Setup



*Note:

Position A: Back Side of the EUT

Position B: Left Side of the EUT

Position C: Front Side of the EUT

Position D: Right Side of the EUT

Position E: Top Side of the EUT

Position F: Bottom Side of the EUT

3.3. Test Results

H-field Strength Test Result:

Test condition: Wireless Charging mode

Frequency Range(KHz)	Probe Position Hx1 (A/m)	Probe Position Hx2 (A/m)	Probe Position Hy (A/m)	Probe Position Hz1 (A/m)	Probe Position Hz2 (A/m)	Result H (A/m)	Limit (A/m)
165.0	0.06	0.07	0.05	0.05	0.06	0.098	4.424

$$H = \sqrt{H_x^2 + H_y^2 + H_z^2} = \sqrt{0.06^2 + 0.05^2 + 0.06^2} \text{ A/m} = 0.098 \text{ A/m}$$

$$\text{Limit} = 0.73 / 0.1650 \text{ A/m} = 4.424 \text{ A/m}$$

Note: All test modes have been tested and only record the worst result.

-----THE END OF REPORT-----