
THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2020-04-16. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT WAS AVAILABLE AVAILABLE AVAILABLE BY THE DOCUMENT WAS AVAILABLE AVAILABLE





Report No.: File Reference No.:	EMC2003151-01 2020-03-31
Applicant:	
Product:	wireless chargers
Model No.:	
Trademark:	N/A
Test Standards:	ETSI EN 301 489-1 v 2.2.3 (2019-11) ETSI EN 301 489-3 v 2.1.1 (2019-03)
Test Result:	The EMC testing has been performed on the submitted samples and found in compliance with council RE Directive 2014/53/EU
Approved By Jack Chung	
Jack Chung	

EMC Manager

Dated: March 31, 2020

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES.

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China Tel (+86 755)8344 8688 Fax (+86 755)8344 2996 Email:info@timeway-lab.com



Special Statement:

DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2020-04-16. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.: 5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Table of Contents

1.0	General Details	4
1.1	Notes	4
1.2	Test Lab Details	4
1.3	Details of Applicant	4
1.4	Application Details	4
1.5	Test Item	5
1.6	Equipment Classification	5
1.7	List of Ports	5
1.8	Ancillary and Peripheral Devices	5
1.9	Test Standards	6
1.10	Test By	6
2.0	Technical Test	7
2.1	Summary of Test Result	7
2.2	Test Report	7
	Clause 8.2 Emission Test- Radiated Emissions	10
	Clause 8.3 DC Power Input/Output Ports Conducted Emissions	16
	Clause 8.4 AC Line Conducted Emissions.	17
	Clause 8.5 Harmonic Current Emissions	20
	Clause 8.6 Flicker and Voltage Fluctuation	22
	Clause 9.2 Immunity Test- Radiated, RF Electromagnetic Fields	23
	Clause 9.3 Electrostatic Discharge	24
	Clause 9.4 Fast Transient Common Mode	25
	Clause 9.5 RF Common Mode	26
	Clause 9.7 Voltage Dips	28
	Clause 9.8 Surge Common & differential Mode (1-phase)	29
3.0	CE Label	30
4.0	Photograph-Test Set up	31
4.2	Photograph- Radiated Emission Test Set up	32
5.0	Photograph-EUT	35
6.0	Test Equipments	40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The TIMEWAY Lab does not assume Responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the TIMEWAY Lab.

1.2 Testing Laboratory SHENZHEN TIMEWAY TESTING LABORATORIES.

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China Tel: +86 755 83448688 Fax :+86 755 83442996 Internet: www.timeway-lab.com

Site on File With the Federal Communications and Commission – United States Registration Number: 744189

1.3 Details of Applicant

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2020-04-16. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER

1.4 Application Details

Date of Receipt of Test Item: March 18, 2020 Date of Receipt of Test Item: March 18, 2020 Date of Test: March 18, 2020~ March 31, 2020

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



1.5 Test Item

Model No Additional Model: N/A Description: wireless chargers

Additional Information

Frequency: 111.5-205 kHz Modulation Type: MSK Power Supply: DC5V from USB Port Input: DC5V, 1.5A, Wireless Output: DC5V, 1A Operation Distance: N/A Resolution: N/A Extreme Temp. Tolerance: -20°C to 55°C

Note: Classification according to CEPT/ERC Recommendation 70-03 & ETSI EN301 489-3 v 2.1.1 (2019-03)

1.6 Equipment Classification

Equipment Category: 3

1.7 List of Ports

Port	Description	Classification ¹	Maximum cable Length	Cable Type
N/A				

Note ¹prots shall be classified as ac power, dc power or signal/control port.

²Maximum cable length corresponding to the appropriate ports shall be classified as $\leq 3m$ or >3m.

1.8 Ancillary and Peripheral Devices

Description	Designation	Serial No.	Manufacturer
N/A			

List of Peripheral Devices Used for Testing

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Description	Designation	Serial No.	Manufacturer		
N/A					

Note: An Equipment (apparatus) used in connection with a receiver or transmitter is considered as an ancillary Equipment (apparatus) if:

a. The equipment is intended for use in conjunction with a receiver or transmitter to provide additional operational and/or control features to the radio equipment. (e.g. to extend control to another position or location); and

b. The equipment cannot be used on a stand alone basis to provide user functions independently of a receiver or transmitter; and

c. The receiver or transmitter to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

1.9 Test Standards

ETSI EN301 489-1 v 2.2.3 (2019-11)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;

Part 1: Common technical requirements;

Harmonised Standard for ElectroMagnetic Compatibility

ETSI EN 301 489-3 v 2.1.1 (2019-03)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services

Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz;

Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

1.10 Test or Witness Test Engineering

Test By: Printing Name: Terry Tang

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



2. Technical Test 2.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed				
Final Verdict: Pass				
(Only "Passed" if all Measurements are "Passed")				

2.2 Test Report

Emission (EMI)

EMI	Port	Requirement		EUT	Result	Applicability
Phenomenon		Standard	Basic Standard Setup			
Conducted	AC Mains	ETSI EN	EN 55032:2015	Refer to	Complies	Applicable
Interference		301489-1: 2019-02		Section 4		
Voltage		Clause 8.4				
Conducted	DC Mains	ETSI EN	EN 55032:2015	Refer to	Complies	Not
Interference		301489-1: 2019-02		Section 4		Applicable
Voltage		Clause 8.3				
Radiated	Enclosure	ETSI EN 301	EN 55032: 2015	Refer to	Complies	Applicable
Interference		489-1: 2019-02		Section 4		
Field		Clause 8.2				
Strength						
30~6000MHz						
Harmonic	AC Mains	ETSI EN 301	EN	Refer to	Complies	Not
Current	Input Port	489-1: 2019-02	61000-3-2:2014	Section 4		Applicable
Emissions		Clause 8.5				
Flicker &	AC Mains	ETSI EN 301	EN	Refer to	Complies	Not
Voltage	Input Port	489-1: 2019-02	61000-3-3:2013	Section 4		Applicable
Fluctuation		Clause 8.6				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



Immunity (EMS)

EM3	Port	Requirement	EUT	Result	Applicability	
Phenomenon		Standard	Basic Standard	Setup		
Electronic	Enclosure	ETSI EN 301	EN 61000-4-2:	Refer to	Complies	Applicable
Discharge		489-1: 2019-02	2009	Section 4		
(ESD)		Clause 9.3				
RF-Electro-	Enclosure	ETSI EN 301 EN 61000-4-3: Refer to Complies		Applicable		
Magnetic Field		489-1: 2019-02	2006	Section 4		
(80-6000MHz)		Clause 9.2				
Fast Transients,	Power Line	ETSI EN 301	EN 61000-4-4:	Refer to	Complies	Applicable
Burst	AC/DC	489-1: 2019-02	2012	Section 4		
		Clause 9.4				
Surge	Surge Power Line ET		EN 61000-4-5:	Refer to	Complies	Applicable
	(1 phase) 489-1: 2019-02		2014	Section 4		
		Clause 9.8				
Transients &	Power Line	ETSI EN 301	ISO	Refer to	Complies	Not
Surge Vehicular	(Car	489-1: 2019-02	7637-1/2:1990	Section 4		Applicable
Environment	Charge)	Clause 9.6				
RF Common	Power Line	ETSI EN 301	EN 61000-4-6:	Refer to	Complies	Applicable
Mode	AC/DC	489-1: 2019-02	2014	Section 4		
(0.15-80MHz)	signal	Clause 9.5				
	Lines					
Vol. Dips,	Input&	ETSI EN 301	EN 61000-4-11	Refer to	Complies	Applicable
Interruptions&	Output AC	489-1: 2019-02	2004	Section 4		
Fluctuations	Ports only	Clause 9.7				
(AC Power)						

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



N/A=Not Applicable

-Performance criteria A for immunity tests with phenomena of a continuous nature;

Communication between the Tx and Rx in the front of pings should not drop during the test.

-Performance criteria B for immunity tests with phenomena of a transient nature;

N/A

-Performance criteria C for immunity tests with power interruptions exceeding a certain time.

N/A

Note: For details see subclause 6.1 ETSI EN 301 489-3

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

Test Item	Uncertainty
Conducted Emissions	3.6dB
Radiated Emissions	4.7dB (Below 1GHz); 5.0dB (above 1GHz)
Harmonic Current Emission	1.2%
Voltage Fluctuations and Flicker	1.5%
Electrostatic Discharge	The waveform of voltage: 1.6%; Time: 3.1%
RF Electromagnetic Field	3.1dB
Electrical Fast Transients	The waveform of voltage: 1.5%; Time: 2.9%
Surge	The waveform of voltage: 1.5%; Time: 2.9%
RF Common Mode	3.9dB
Voltage Dips and Interruptions	The waveform of voltage: 1.5%; Time: 2.9%

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2020-04-16. AT THE TIME OF GENERATING THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER



Clause 8.2 Emission Test – Radiated Emission

This test assesses that ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

According to EMC basic standard (EN 55032)

Measurement according to EMC basic standard, The test results correspond to the 3m Semi-Anechoic Chamber results.

The EUT and it simulators are placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission, all of The interface cables must be manipulated according to EN55032: 2015 on radiated measurement.

Radiated emissions were invested over the frequency range from 30MHz to 1 GHz using a receiver bandwidth of 120kHz.

Radiated emissions were invested over the frequency range from 30MHz to 6 GHz

Radiated Emission was performed at an antenna to EUT distance of 3 meters.


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Radiated Emission Test

Block diagram of Test setup

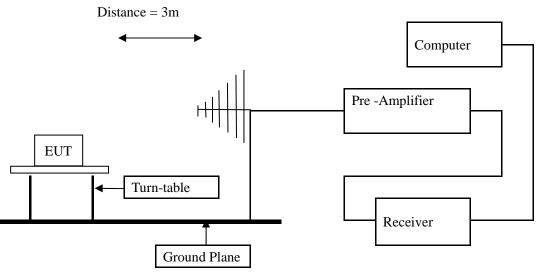

Power line conducted Emission Limit

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB µ V/m)
30-230	10/3	30.0/40.0
230-1000	10/3	37.0/47.0
1000-3000	3	50 (AV) /70 (PK)
3000-6000	3	54 (AV) /74 (PK)

Note: The lower limit shall apply at the transition frequencies

Test result

Please refer to following table

Product	Wireless chargers	Model:	AB0196
Test Mode	Normal Operation	Test Voltage	230V~
Test Item	Radiated Emission	Humidity	56% RH
Temperature	24 deg. C,	Test result	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Radiated Disturbance (30MHz----1000MHz) EUT Operating Environment Temperature: 25 °C Humidity: 55%RH A

Atmospheric Pressure: 101 kPa


EUT set Condition: Wireless Charging Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

CE_EN 55032 Class B 30MHz-1GHz

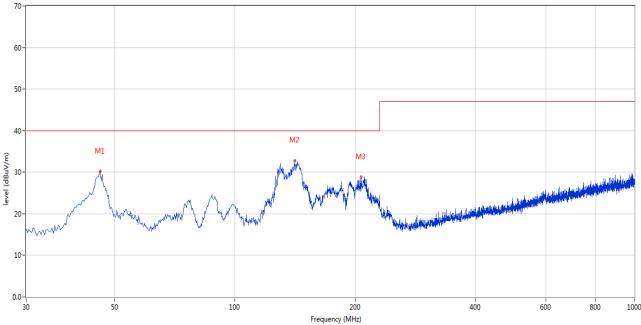

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	46.001	30.18	-11.40	40.0	-9.82	Peak	360.00	200	н	Pass
2	141.037	32.72	-17.26	40.0	-7.28	Peak	360.00	200	н	Pass
3	206.981	28.84	-13.67	40.0	-11.16	Peak	360.00	200	н	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



B: Radiated Disturbance (30MHz----1000MHz) EUT Operating Environment Temperature:25°C Humidity: 55%RH Att

Atmospheric Pressure: 101 kPa


EUT set Condition: Wireless Charging Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

CE_EN 55032 Class B 30MHz-1GHz

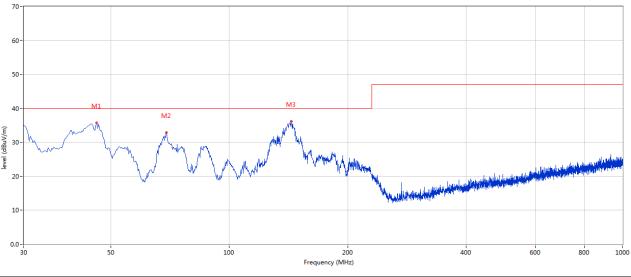

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	46.174	35.60	-11.40	40.0	-4.40	Peak	133.00	100	V	Pass
2	69.275	32.95	-15.38	40.0	-7.05	Peak	3.00	100	V	Pass
3	143.704	36.14	-17.14	40.0	-3.86	Peak	294.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




C: Radiated Disturbance (1000MHz----6000MHz) **EUT Operating Environment** Humidity: 55%RH

Temperature: 25°C

Atmospheric Pressure: 101 kPa

EUT set Condition: Wireless Charging Mode **Equipment Level: Class B Results: Pass** Please refer to following diagram for individual

EN 55032 Class B 1GHz-6GHz

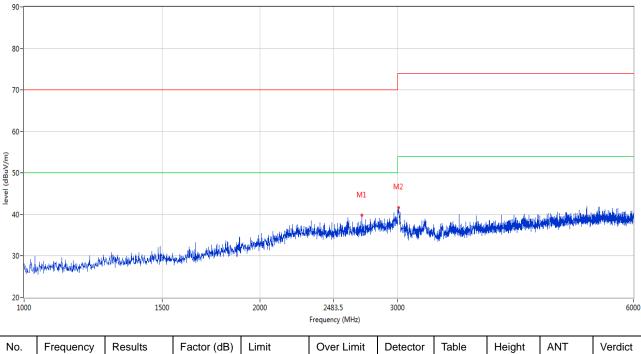

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2700.825	39.77	-2.96	70.0	-30.23	Peak	14.00	100	V	Pass
2	3006.998	41.68	-2.61	74.0	-32.32	Peak	15.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

D:



 Radiated Disturbance (1000MHz----6000MHz)

 EUT Operating Environment

 Temperature:25 °C
 Humidity: 55% RH


 Atmospheric Pressure: 101 kPa

 EUT set Condition: Wireless Charging Mode

 Equipment Level: Class B

 Results: Pass

 Please refer to following diagram for individual

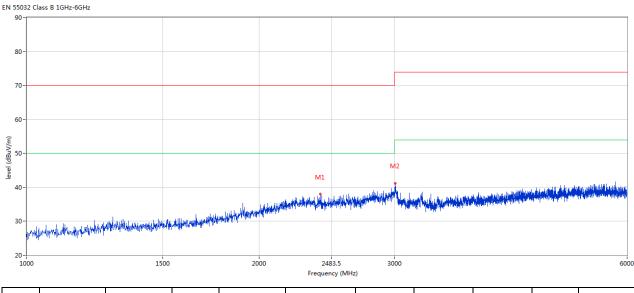

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	38.02	-3.57	70.0	-31.98	Peak	5.00	100	Н	Pass
2	3004.499	41.23	-2.62	74.0	-32.77	Peak	7.00	100	Н	Pass

Note: The emission level less than the limit for more than 10dB, no necessary to take down the record.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 8.3 DC Power Input/output Ports Conducted Emissions

Test Method:

According to EMC Basic Standard (EN 55032 Class-B) and the Artificial Mains Networks (AMN) shall be connected to a DC power source.

The measurement frequency range extends from 150 kHz to 30 MHz. When the EUT is a transmitter operating at frequencies below 30 MHz, then the exclusion band for transmitters applies (see clause 4.3) for measurements in the transmit mode of operation.

For emission measurements on DC output ports the relevant port shall be connected via an AMN to a load drawing the rated current of the source.

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

Test Mode: --

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2020-04-16. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 8.4 AC Line Conducted Emissions

According to EMC Basic Standard (EN 55032 Class-B)

- 1. For the table top EUT the distance to the reference ground plane (wall) should be 40 cm.
- 2. AC input line plugged into LISN.

EUT Operating Mode Wireless Charging Mode

Results

Power Line (L, N)	EUT Operating mode or operating mode no.	Detector (Peak, AV, QP)	Additional (scan-) Information (e.g. Pre-test Fast scan, Maxhold, Final measurement.)	Result (Passed / Failed)
L=>GND N=>GND	Wireless Charging Mode	QP & AV QP & AV		Pass Pass

The frequency spectrum from 0.15MHz to 30MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz

Temperature:25 °CHumidity:53% RH

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Ρ

AVG

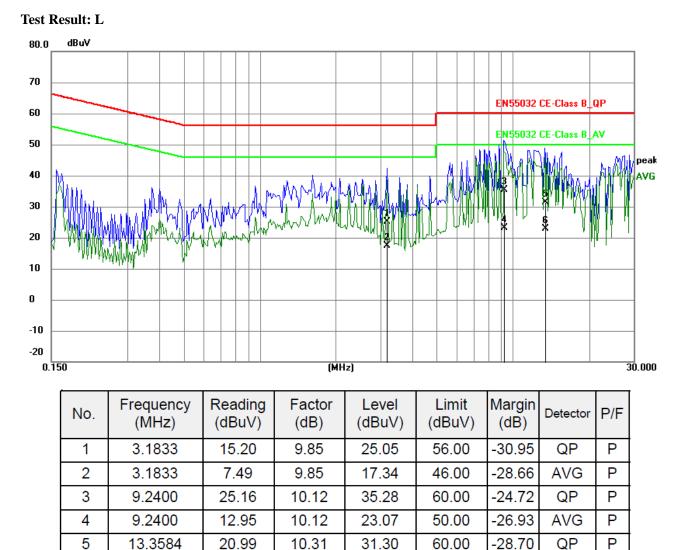

The report refers only to the sample tested and does not apply to the bulk.

12.52

10.31

22.83

50.00

-27.17


6

13.3584

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Test Result: N



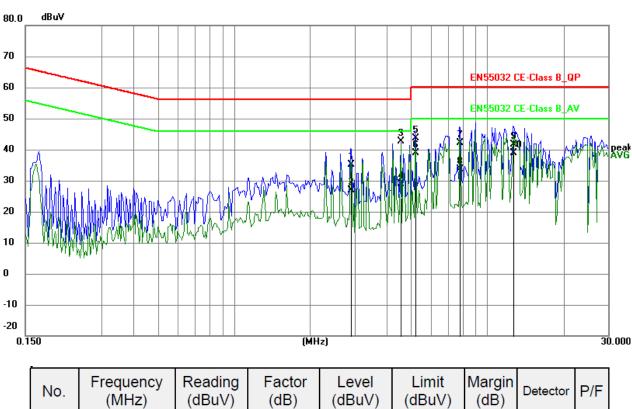

No.	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	Detector	P/F
1	2.8995	25.20	9.84	35.04	56.00	-20.96	QP	Ρ
2	2.8995	16.98	9.84	26.82	46.00	-19.18	AVG	Ρ
3	4.5561	32.73	9.91	42.64	56.00	-13.36	QP	Ρ
4	4.5561	18.95	9.91	28.86	46.00	-17.14	AVG	Ρ
5	5.2074	33.65	9.94	43.59	60.00	-16.41	QP	Ρ
6	5.2074	28.91	9.94	38.85	50.00	-11.15	AVG	Ρ
7	7.8087	32.20	10.05	42.25	60.00	-17.75	QP	Ρ
8	7.8087	23.48	10.05	33.53	50.00	-16.47	AVG	Ρ
9	12.6993	31.39	10.28	41.67	60.00	-18.33	QP	Ρ
10	12.6993	28.57	10.28	38.85	50.00	-11.15	AVG	Ρ

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 8.5 Harmonic Current Emissions

This test was performed as per EMC Basic Standard EN61000-3-2 :2014 EUT Operating Mode: Wireless Charging Mode

Results: N/A

Port	EUT Operating mode or	Result		
	operating mode no.	(Passed / Failed)		
AC Input	Wireless Charging Mode	N/A		

Please see the following test figure:

Table 1 - Limit of Harmon	Table 1 - Limit of Harmonics Current Measurement					
Limits for Class A equipment						
Harmonics order (n)	Max. permissible harmonics current (A)					
	Odd harmonics					
3	2.3					
5	1.14					
7	0.77					
9	0.40					
11	0.33					
13	0.21					
15<=n<=39	0.15 x 15/n					
	Even harmonics					
2	1.08					
4	0.43					
6	0.30					
8<=n<=40	0.23 x 8/n					

Note:

- 1. For Class A equipment, the harmonics of the input current shall not exceed the absolute values given in table 1.
- 2. For Class B equipment, the harmonics of the input current shall not exceed the values given in table 1 multiplied by factor of 1, 5.

Table 2 - Limit of Harmonics Current Measurement						
Limits for Class C equipment						
Harmonics order (n)	Max. permissible harmonics current expressed as a percentage of the input current					
	at the fundamental frequency (A)					

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Odd harmonics only						
2	2					
3	$30 imes \lambda^*$					
5	10					
7	7					
9	5					
11<= n<=39	3					

Note: The harmonic current limits of lighting equipment shall not exceed the relative limits given in table 2.

Table 3 - Limit of Harmonics Current Measurement								
Limits for Class D equipment								
Harmonics order (n)	Maximum permi	ssible harmonic	Maximum permissible harmonic current A					
	current per watt m	A/W						
Odd harmonics only								
3	3.4		2.30					
5	1.	9	1.14					
7	1.)	0.77					
9	0.	5	0.40					
11	0.3	5	0.33					
13<=n<=39	3.85	5/n	See table 1					
11<= n<=39			3					

Note: The harmonic of the input current shall not exceed the values that can be derived form table 3.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The EUT is classified as follows:
- Class A Balanced three-phase equipment and all other equipment, except that stated in one of the following classes.
- Class B Portable tools.
- Class C Lighting equipment, including dimming devices.
- Class D Equipment having an input current with "special wave shape" and an active input power, P≤600W

Note: the input power less than 75W. This test item not applicable.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.6 Flicker and Voltage Fluctuation

This test was performed as per EMC Basic Standard EN 61000-3-3: 2013 Environmental conditions: Temperature: 25°C; Humidity: 50%RH EUT Operating Mode: Wireless Charging Mode

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)					
AC Input	Wireless Charging Mode	N/A					
Please refer to the following test figure							

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- a.. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- b. During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT 10 minutes and the observation period for long- term flicker indicator is 2 hours.

Note: Tests need not be made on equipment which is unlikely to produce significant voltage fluctuations or flicker.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.2 Immunity Test – Radiated, RF Electromagnetic Field

According to EMC Basic Standard (EN 61000-4-3[9])

Operating Mode: Wireless Charging Mode

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

Type of Port: Enclosure

Performance Criterion: CT/CR

The distance between the turn-table axis and Tx&Rx-antenna is 3m.

Field strength = 3V/m

Start Frequency = 80MHz Stop Frequency = 6000MHz

Frequency Step = lin 1MHz

Modulation = AM, 400Hz,1kHz, 80%

Results

Frequency	Antenna	Radiation to	Reaction of the EUT During	Result
(MHz)	Polarity		and after test	
80-6000	Horizontal	Front	No reactions recognized	Passed
80-6000	Vertical	Front	No reactions recognized	Passed
80-6000	Horizontal	Rear	No reactions recognized	Passed
80-6000	Vertical	Rear	No reactions recognized	Passed
80-6000	Horizontal	Left	No reactions recognized	Passed
80-6000	Vertical	Left	No reactions recognized	Passed
80-6000	Horizontal	Right	No reactions recognized	Passed
80-6000	Vertical	Right	No reactions recognized	Passed

Note: Performance criteria A observed.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with

The calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 9.3 Electrostatic Discharge

According to EMC basic standard (EN61000-4-2[10]

Operating Mode: Wireless Charging Mode

Environmental conditions: Temperature: 24°C; Humidity: 50%RH

Type of Port: Enclosure, USB ports, Screw

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

Direct contact discharge on conducting surfaces of EUT

Indirect air discharge on insulating surfaces of EUT

 $\pm 2kV$, $\pm 4kV$ direct discharge & $\pm 2kV$, $\pm 4kV$, $\pm 8kV$ air discharge

Test Results

Item	Contact Discharge to co to couplin	Air Discharge at insulating surfaces				
	Direct Contact Discharge	Direct Contact Discharge Indirect Contact Discharge				
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result			
+2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed			
-2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed			
+4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed			
-4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed			
+8kV	-	-	n.r.r Passed			
-8kV	-	-	n.r.r Passed			

Remarks: n.r.r. = no reaction recognized

Performance Criteria A observed and No any function degraded during the tests.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.4 Fast Transients Common Mode

According to EMC basic standard (EN61000-4-4 [11]

Operating Mode: Wireless Charging Mode

Environmental conditions: Temperature: 25°C; Humidity: 51%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 10 cm. The test level for ac mains power input ports shall be 1kV open circuit.

Test Setup

Burst on Power Line (direct injection)

Test Results

Adjustment on UCS 500 M4: Trigger "AUTO", Test Time: 60s for even							or every voltage and polarity	
Burst length: 15ms 120s for every voltage and								d polarity
Testing on power Reaction of The Test Object During and after Test							Result	
Line (dir	rect injection)	n)						
Test	Repetition	L1 =>GND	L2=>	L3=>	N=>	PE=>	L1, N, =>	
Voltage	Frequency	(+=>GND)	GND	GND	GND	GND	GND	
-0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
-1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 9.5 RF Common Mode

According to EMC basic standard (EN61000-4-6 [10])

Operating Mode: Charging Mode

Environmental conditions: Temperature: 25°C; Humidity: 51%RH

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

Start Frequency = 150KHz Stop Frequency = 80MHz

Frequency Step = 50kHz in the range of 150kHz-5MHz

1% increment in the range of 5MHz-80MHz Modulation = AM, 400Hz, 1kHz, 80%

Test Setup

Injection via CDN or BIC clamp

Test Results

Injection On	Injection Via	Reaction of the EUT During and after test	Result
AC input power line	CDN	No reactions recognized	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 9.6 Transients and Surges in the Vehicular Environment The test method shall be in accordance with ISO 7637-2 [8] for 12 V DC powered equipment

Environmental conditions: Temperature: 26°C; Humidity: 52%RH Operating Mode: Wireless Charging Mode Type of Port: DC power input port

Performance Criterion: TT/TR

Test Requirement:

a) Pulse 3a and 3b, level III, with the test time reduced to 20 min for each; Pulse 4, level III, 10 pulses, with the characteristics as follows: Vs = -6.5V; Va = -2.5V; t6 = 25 ms; t7 = 20 ms; t8 = 20ms; $t_9 = 5$ s; $t_{10}=50$ ms, $t_{11}=20$ ms, pulse cycle time: 60 s

b) Pulse 1, level III: $t_1 = 2,5$ s; $t_2=200$ ms, $t_3=50 \ \mu$ s 10 pulses;

Pulse 2, level III: $t_1 = 2,5$ s; 10 pulses;

Both a) and b) shall be done as the manufacturer does not require the radio equipment to have a direct connection to the 12 V main vehicle battery

Test Result: Not Applicable

Note: EUT not used in a vehicle, this test item not applicable.

For 12V system

Test Pulse Number	Test Voltage	Test Level	Number of test	Reaction of EUT	Test result
Inuilibei			pulses or test time	during and after Test	
1	-75 V	III	10pulses	n.r.r- performance	N/A
				criteria A observed	
2a	+37 V	III	10pulses	n.r.r- performance	N/A
				criteria A observed	
2b	+10 V	III	10pulses	n.r.r- performance	N/A
				criteria A observed	
3a	-112 V	III	20min	n.r.r- performance	N/A
				criteria A observed	
3b	+75 V	III	20min	n.r.r- performance	N/A
				criteria A observed	
4	-6 V	III	10pulses	n.r.r- performance	N/A
				criteria A observed	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.7 Voltage Dips

According to EMC basic standard (EN61000-4-11 [13])

Operating Mode: Wireless Charging Mode

Environmental conditions: Temperature: 24°C; Humidity: 49%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

The test level shall be- a vol. Reduction of the supply vol. 100% for 10ms, 100% for 20ms , 30% for 500ms And 100% for 5000ms

Test Results

Voltage Dip:

voltage Dip.			-		
Test Level	Reduction	Duration	Phase Angle	Reaction of EUT	Result
% Ut		(periods)		during and after Test	
0	100%	100% $10ms$ $0^{\circ} - 360^{\circ}$ ¹		n.r.r- performance	Pass
0	100%	TOHIS	0 - 300	criteria A observed	I 855
0	100%	20ms	0° - 360°	n.r.r- performance	Pass
0	100%	201118	0 - 300	criteria A observed	
70	200/	500ma	0° 260°	n.r.r- performance	Pass
70	30%	500ms	0° - 360°	criteria A observed	
			•		

Voltage Interceptions:

0 1					
Test Level	Reduction	Duration	Phase Angle	Reaction of EUT	Result
% Ut		(periods)		during and after Test	
0	100%	5000ms	0° - 360°	n.r.r- performance	Pass
		eooonis	0 200	criteria B observed	1 455

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Clause 9.8 Surges Common & Differential Mode (1-phase)

According to EMC basic standard (EN61000-4-5 [14])

Operating Mode: Wireless Charging Mode

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

1KV open circuit for common mode & 0.5kV open circuit for differential mode.

Test Results

5 pulses for each polarity and test voltage, alternating and negative/positive, triggered in case of AC- powerline: 0° , 45° , 90° 180°, 270° , referred to the line frequency. (L1)

Repetition rate is 1 per min.

Test	Reaction of the test object during and after test by trigger angle/pulse							
Voltage	no.(coupling	on DC-lines =>trig	ger angle not relevant).		Result		
	0°/pulse	0° /pulse 45 [°] /pulse, no.3, 90 [°] /pulse, no. 5, 6 180 [°] /pulse, no. 270 [°] /pulse, no.						
	no1, 2	4		7, 8	9, 10			
	Capaciti	ve coupling on AC	line: L1=>N or DC lin	nes lines +=>- (Ri=	$2 \Omega / C = 18 uF$)			
-0.5kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass		
+0.5kV	Recognized	Recognized	Recognized	Recognized	Recognized			
-1.0kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass		
+1.0kV	Recognized	Recognized	Recognized	Recognized	Recognized			
-2.0Kv	N/A	N/A	N/A	N/A	N/A	N/A		
+2.0kV								
- kV	N/A	N/A	N/A	N/A	N/A	N/A		
+kV								

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



3. CE Mark label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.




Mark Location: Rear enclosure

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



4. **Photographs – Test Setup Photograph – Conducted Test Setup**

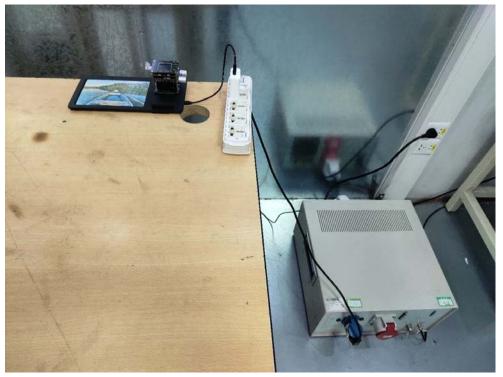


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



4.2 Radiated Emission Test Setup:

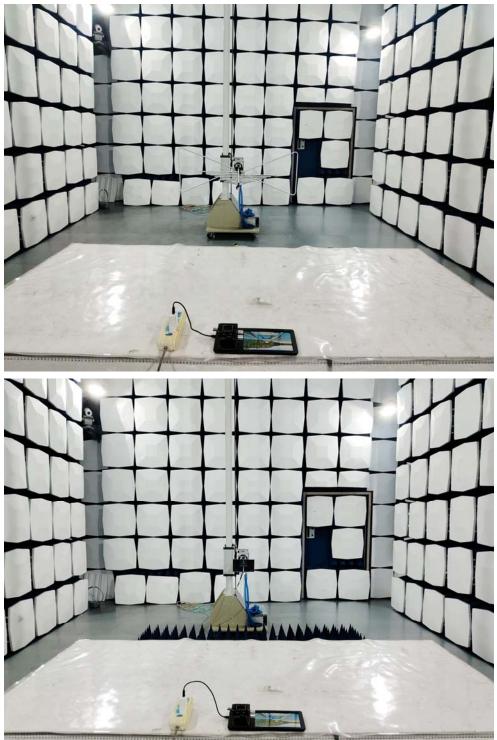


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photograph – ESD Test Setup

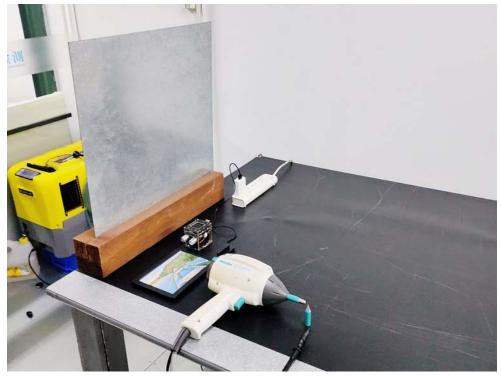

Photograph – EFT/B, Surge, Voltage Dips Test Setup

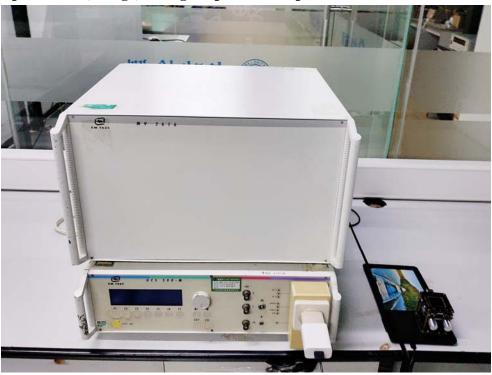


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photograph –CS Test Setup

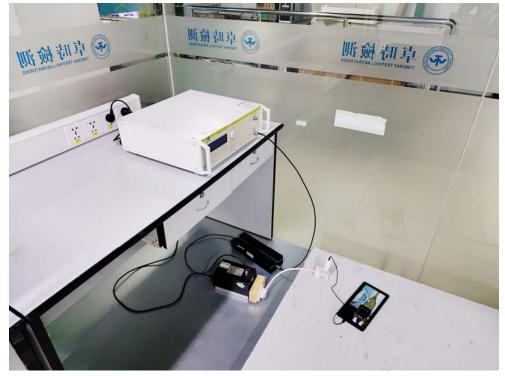

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.




5. Photographs – EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



External View

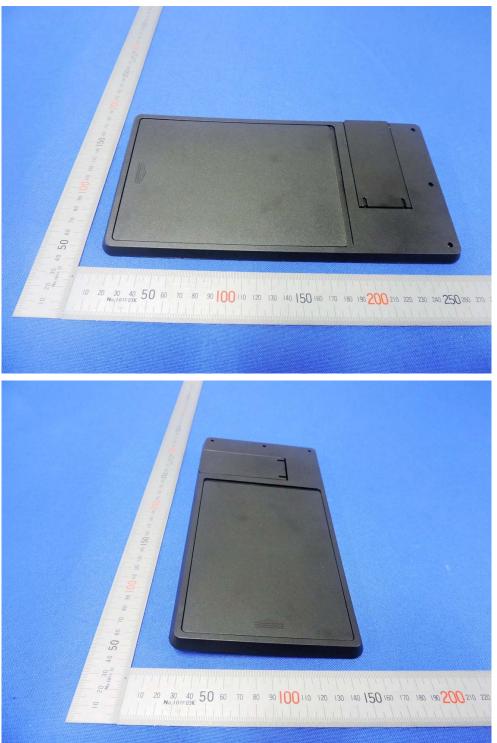


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



External View

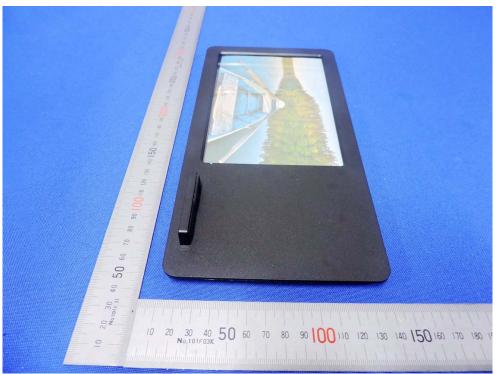


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



Internal View

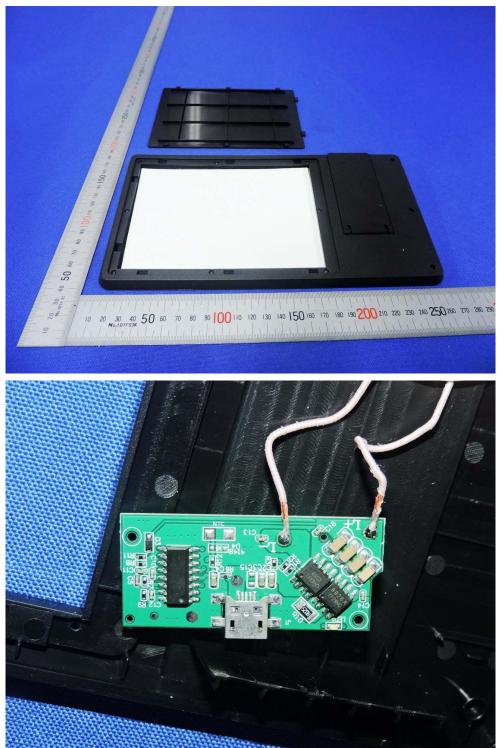


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Internal View

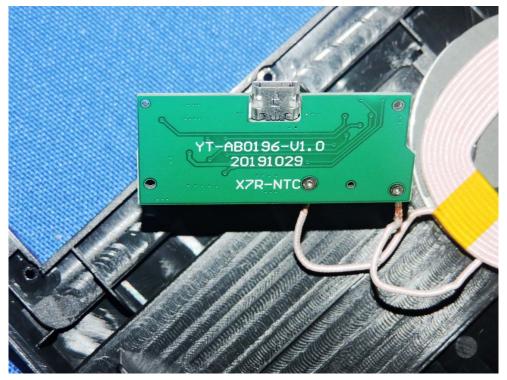

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



6.0 List of Measurement Equipment

6.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESH3	860905/006	RS	2019.06.21	1Year
Spectrum Analyzer	ESA-L1500A	US37451154	HP	2019.06.21	1Year
PULSE LIMITER	ESH3-Z2	100281	RS	2019.06.21	1Year
LISN	ESH3-Z5	100294	RS	2019.06.21	1Year
LISN	NNB42	00012	SCHAFFNER	2020.01.07	1Year

6.2 Radiated Disturbance Test

				Calibration	Calibration
Name	Model No	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESPI 3	100379	RS	2019.06.21	1Year
Spectrum Analyzer	E4407B	MY50441392	HP/Agilent	2019.06.21	1Year
Amplifier	BBV9743	#218	HP/Agilent	2019.06.21	1Year
Bilog Antenna	VULB9163	9163/340	Schwarebeck	2019.06.21	1Year
Horn Antenna	BBHA 9120D	9120D-631	RS	2019.07.09	1Year
Amplifier	8449B	3008A00160	HP/Agilent	2019.06.21	1Year

6.3 Harmonic & Flicker Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
Harmonics Flicker Test System	PACS-1	72305	CI	2019.09.28	1Year
5K VA AC Power Source	5001iX	56060	CI	2019.09.28	N/A

6.4 ESD Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
ESD Simulator	DITO	0404-24	EM TEST	2019.06.21	1Year

6.5 RF field Strength Susceptibility

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Signal Generator	SMT03	100059	RS	2019.06.21	1Year
Power Meter	NRVS		RS	2019.06.21	1Year
Voltage Probe	URV5-Z2	100012	RS	2019.06.21	1Year
Voltage Probe	URV5-Z2	100013	RS	2019.06.21	1Year
Power Amplifier	150W1000	300999	AR	2019.06.21	1Year
Power Amplifier	25S1G4AM1	305993	AR	2019.06.21	1Year
Field Probe	CBL6111C	2576	Holaday	2019.06.21	1Year
Bilog Antenna	MCDC		Chase	2019.06.21	1Year

6.6 Electrical Fast Transient/Burst (EFT/B) Immunity test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EFT Generator	UCS 500 M4	0304-42	EM TEST	2019.06.21	1Year
Power Source	MV2616	0104-14	EM TEST	2019.06.21	1Year

6.7 Surge Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
Ultra Compact	UCS 500			2019.06.21	
Simulator	M4	0304-42	EM TEST		1Year
Power Source	MV2616	0104-14	EM TEST	2019.06.21	1Year

6.8 Conducted Immunity Test

					Calibration	Calibration
Name		Model No.	Serial No.	Manufacturer	Date	Cycle
Continuous	Wave				2019.06.21	
Simulator		CWS 500C	0407-05	EM TEST		1 Year

6.9 Voltage Dips/Interruption Immunity Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
Ultra Compact				2019.06.21	
Simulator	UCS 500 M4	0304-42	EM TEST		1Year
Power Source	MV2616	0104-14	EM TEST	2019.06.21	1Year

End of the Report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.