

TEST REPORT

Report No.: BCTC2206631853E

Applicant:

Product Name: USB HUB

Model/Type
reference:

Tested Date: 2022-06-10 to 2022-07-07

Issued Date: 2022-07-08

Shenzhen BCTC Testing Co., Ltd.



Product Name: USB HUB
Trademark: N/A
Model /Type Ref.:
Prepared For:
Address:
Manufacturer:
Address:
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2022-06-10
Sample tested Date: 2022-06-10 to 2022-07-07
Issue Date: 2022-07-08
Report No.: BCTC2206631853E
Test Standards EN 55032:2015+A1:2020, EN 55035:2017+A11:2020
Test Results PASS

Tested by:



Lucas Chan /Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information.....	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	8
5. Test Facility And Test Instrument Used.....	9
5.1 Test Facility.....	9
5.2 Test Instrument Used.....	9
6. Radiated Emissions Test.....	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limits.....	11
6.3 Test Procedure	11
6.4 Test Results	12
7. Immunity Test Of General The Performance Criteria	14
8. Electrostatic Discharge (ESD)	15
8.1 Test Specification.....	15
8.2 Block Diagram of Test Setup	15
8.3 Test Procedure	15
8.4 Test Results	16
9. Continuous Rf Electromagnetic Field Disturbances (RS)	17
9.1 Test Specification.....	17
9.2 Block Diagram of Test Setup	17
9.3 Test Procedure	17
9.4 Test Results	18
10. EUT Photographs.....	19
11. EUT Test Setup Photographs.....	22

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2206631853E	2022-07-08	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55032	Conducted emissions from the AC mains power ports	N/A ³
EN 55032	Asymmetric mode conducted emissions	N/A ¹
EN 55032	Conducted differential voltage emissions	N/A ²
EN 55032	Radiated emissions	Pass

IMMUNITY (EN 55035)		
Standard	Test Item	Test result
EN 55035	Electrostatic discharge (ESD)	Pass
EN 55035	Continuous RF electromagnetic field disturbances(RS)	Pass
EN 55035	Electrical fast transients/burst (EFT)	N/A ³
EN 55035	Surges	N/A ³
EN 55035	Continuous induced RF disturbances (CS)	N/A ³
EN 55035	Broadband impulse noise disturbances, repetitive	N/A ⁴
EN 55035	Broadband impulse noise disturbances, isolated	N/A ⁴
EN 55035	Power frequency magnetic field (PFMF)	N/A ⁵
EN 55035	Voltage dips and interruptions (DIPS)	N/A ³

Remark:

1. Applicable to ports listed above and intended to connect to cables longer than 3 m.
2. The Product has no antenna port.
3. The EUT is powered by the DC only , the test item is not applicable
4. Applicable only to CPE xDSL ports.
5. The Product doesn't contain any device susceptible to magnetic fields.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test item	Value (dB)
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90

4. Product Information And Test Setup

4.1 Product Information

Ratings:

The highest frequency of the internal sources of the EUT is (less than 108)MHz:

DC 5V

☒ less than 108 MHz, the measurement shall only be made up to 1 GHz.

☐ between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

☐ between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

☐ above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Specification	Note
1	--	--	Applicant	---	Yes/No	With a ferrite ring in mid Detachable
2	--	--	BCTC	--	Yes/No	--

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	PC	Lenovo	ThinkPad S2	--	---	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use

4.4 Test Mode

Test item	Test Mode	Test Voltage
Radiated emissions(30MHz-1GHz) Class B	Data transmission	DC 5V
Electrostatic discharge (ESD) B <input checked="" type="checkbox"/> Air Discharge: $\pm 8\text{kV}$ <input checked="" type="checkbox"/> Contact Discharge: $\pm 4\text{kV}$ <input checked="" type="checkbox"/> HCP & VCP: $\pm 4\text{Kv}$ 10 times each point/	Data transmission	DC 5V
Continuous RF electromagnetic field disturbances(RS) 80MHz-1000MHz, 1800MHz, 2600MHz,3500MHz,5000MHz 3V/m,80% AM Front, Rear, Left, Right H/V	Data transmission	DC 5V

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Radiated Emissions Test (966 Chamber#01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023
Horn Antenna	schwarzbeck	BBHA9120D	1541	May 26, 2022	May 25, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\


Electrostatic Discharge Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKUSUI	KES4201A	UH002321	May 26, 2022	May 25, 2023

Continuous RF Electromagnetic Field Disturbances Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 24, 2022	May 23, 2023
Power sensor	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Power sensor	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Amplifier	SKET	HAP_801000-250W	\	May 24, 2022	May 23, 2023
Amplifier	SKET	HAP_0103-75W	\	May 24, 2022	May 23, 2023
Amplifier	SKET	HAP_0306-50W	\	May 24, 2022	May 23, 2023
Stacked double Log.-Per. Antenna	Schwarzbeck	STLP 9129	\	\	\
Field Probe	Narda	EP-601	\	May 24, 2022	May 23, 2023
Signal Generator	Agilent	N5181A	MY50143748	May 24, 2022	May 23, 2023
Software	SKET	EMC-S	1.2.0.18	\	\

6. Radiated Emissions Test

6.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

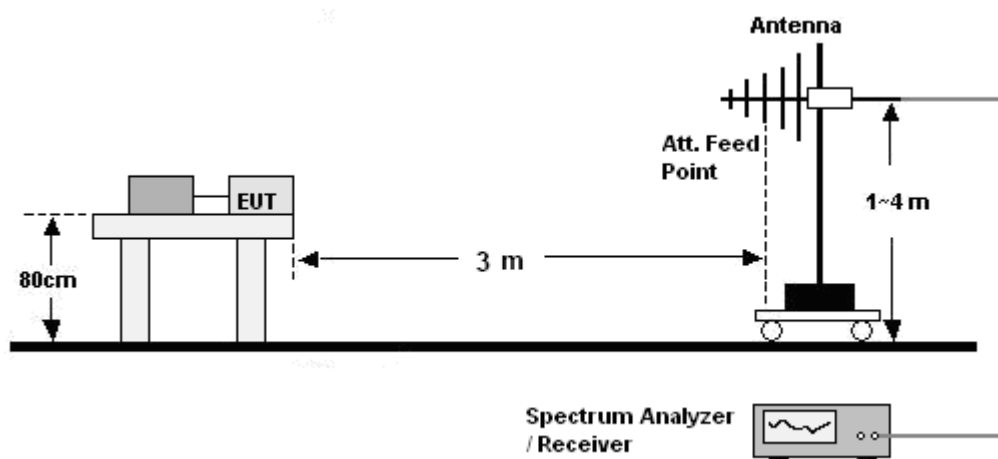

6.2 Limits

Limits for radiated disturbance of Class B MME

Frequency (MHz)	Quasi-peak limits at 3m dB(μ V/m)
30-230	40
230-1000	47

Note: The lower limit shall apply at the transition frequencies.


6.3 Test Procedure

30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 0.8m above the ground in a semi anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

6.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	DC 5V	Test Mode:	Data transmission

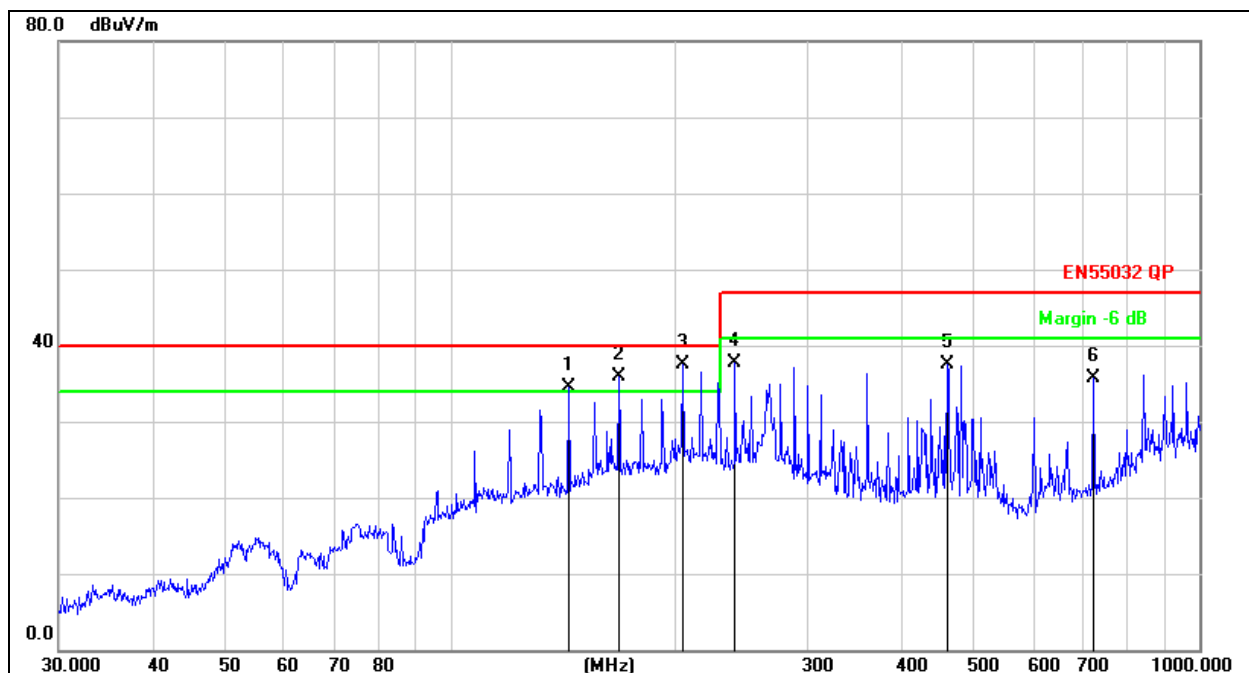


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	143.8294	53.59	-19.08	34.51	40.00	-5.49	QP
2	!	167.8242	53.90	-18.05	35.85	40.00	-4.15	QP
3	*	204.2376	52.79	-15.38	37.41	40.00	-2.59	QP
4		239.9874	52.49	-14.81	37.68	47.00	-9.32	QP
5		460.7271	46.87	-9.31	37.56	47.00	-9.44	QP
6		721.7259	39.01	-3.32	35.69	47.00	-11.31	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	DC 5V	Test Mode:	Data transmission

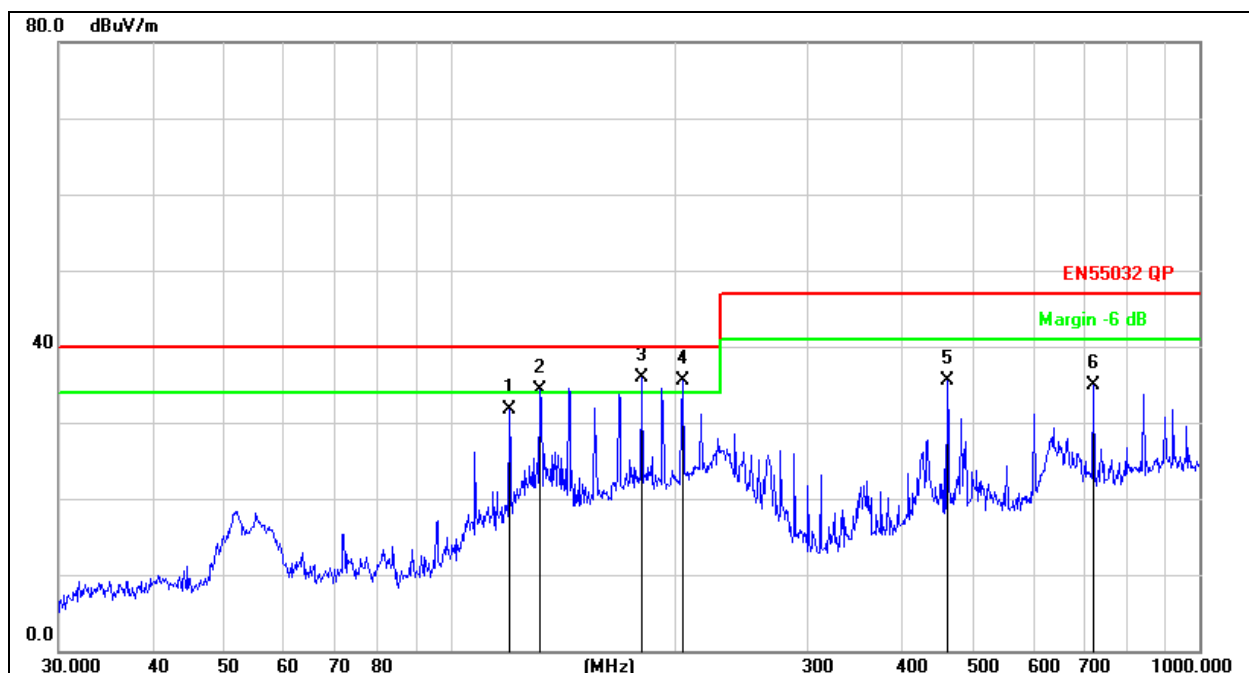

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		119.8555	49.08	-17.46	31.62	40.00	-8.38	QP
2	!	131.7576	52.66	-18.26	34.40	40.00	-5.60	QP
3	*	180.0165	52.92	-17.06	35.86	40.00	-4.14	QP
4	!	204.2376	50.82	-15.38	35.44	40.00	-4.56	QP
5		460.7271	44.76	-9.31	35.45	47.00	-11.55	QP
6		721.7259	38.25	-3.32	34.93	47.00	-12.07	QP

7. Immunity Test Of General The Performance Criteria


Product Standard	EN 55035:2017+A11:2020 clause 8
CRITERION A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
CRITERION B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
CRITERION C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

8. Electrostatic Discharge (ESD)

8.1 Test Specification

Test Port	: Enclosure port
Discharge Impedance	: 330 ohm / 150 pF
Discharge Mode	: Single Discharge
Discharge Period	: one second between each discharge

8.2 Block Diagram of Test Setup

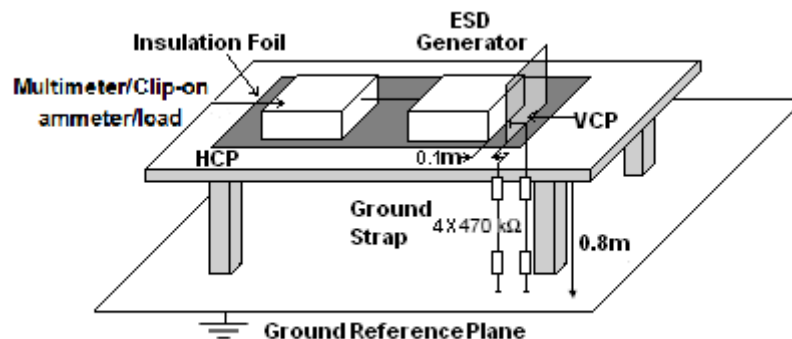

8.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the Product. The ESD generator was positioned vertically at a distance of 0.1 meters from the Product with the discharge electrode touching the HCP.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the Product were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the Product.

8.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode:	Data transmission
Test Voltage :	DC 5V		

Discharge Method	Discharge Position	Voltage (±kV)	Min. No. of Discharge per polarity (Each Point)	Required Level	Performance Criterion
Contact Discharge	Conductive Surfaces	4	10	B	A
	Indirect Discharge HCP	4	10	B	A
	Indirect Discharge VCP	4	10	B	A
Air Discharge	Slots, Apertures, and Insulating Surfaces	8	10	B	A
Note*: N/A					


9. Continuous Rf Electromagnetic Field Disturbances (RS)

9.1 Test Specification

Test Port	: Enclosure port
Step Size	: 1%
Modulation	: 1kHz, 80% AM
Dwell Time	: 1 second
Polarization	: Horizontal & Vertical

9.2 Block Diagram of Test Setup

Below 1GHz:

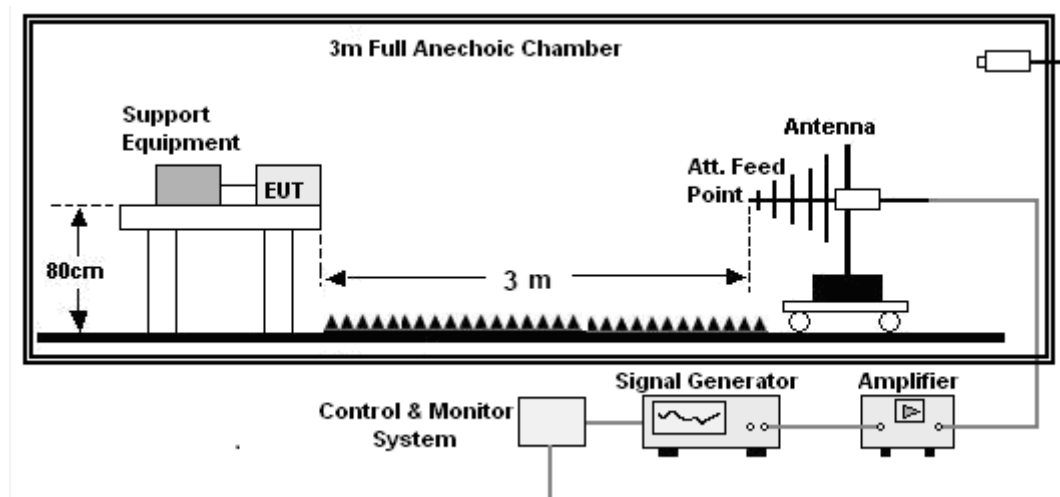

9.3 Test Procedure

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- The frequency range is swept from 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond, but should not exceed 5 s at each of the frequencies during the scan.
- The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.
- For Broadcast reception function: Group 2 not apply in this test.

9.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode:	Data transmission
Test Voltage :	DC 5V		


Frequency	Position	Field Strength (V/m)	Required Level	Performance Criterion
80 - 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz	Front, Right, Back, Left	3	A	A
Note: N/A				

10. EUT Photographs

EUT Photo 1




EUT Photo 2

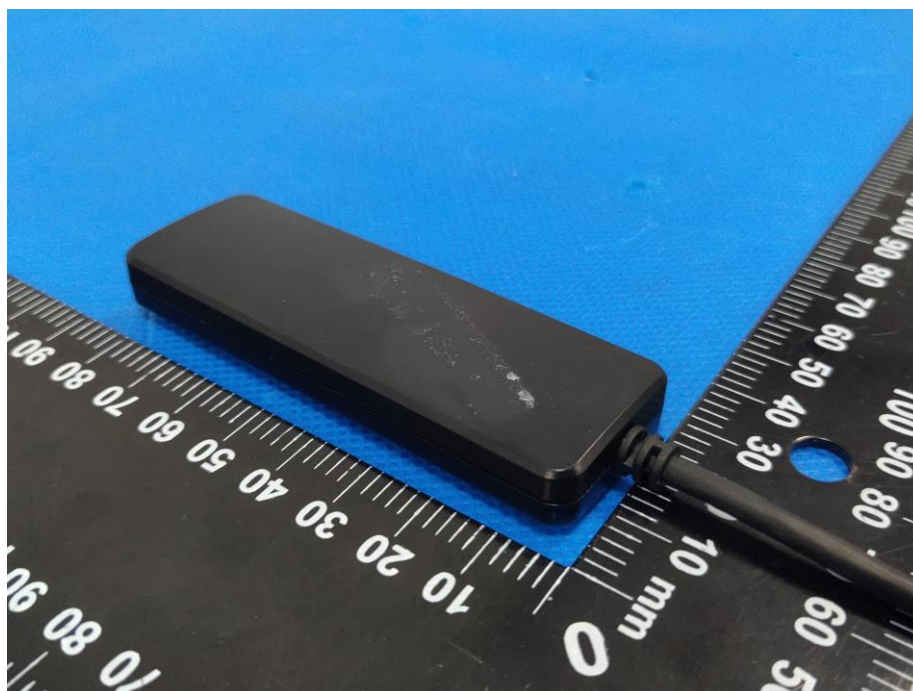


EUT Photo 3



EUT Photo 4

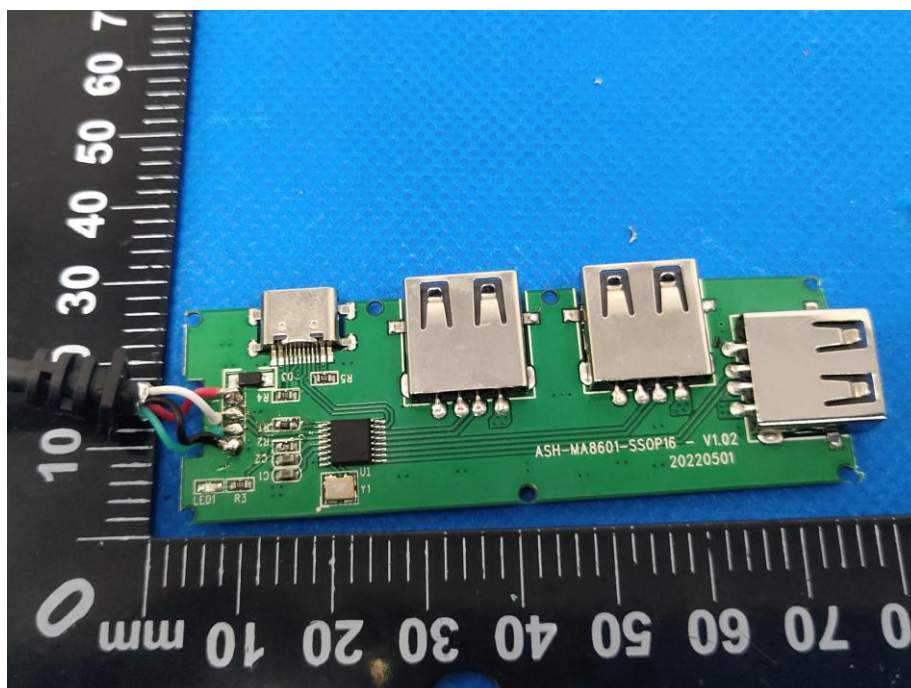


EUT Photo 5

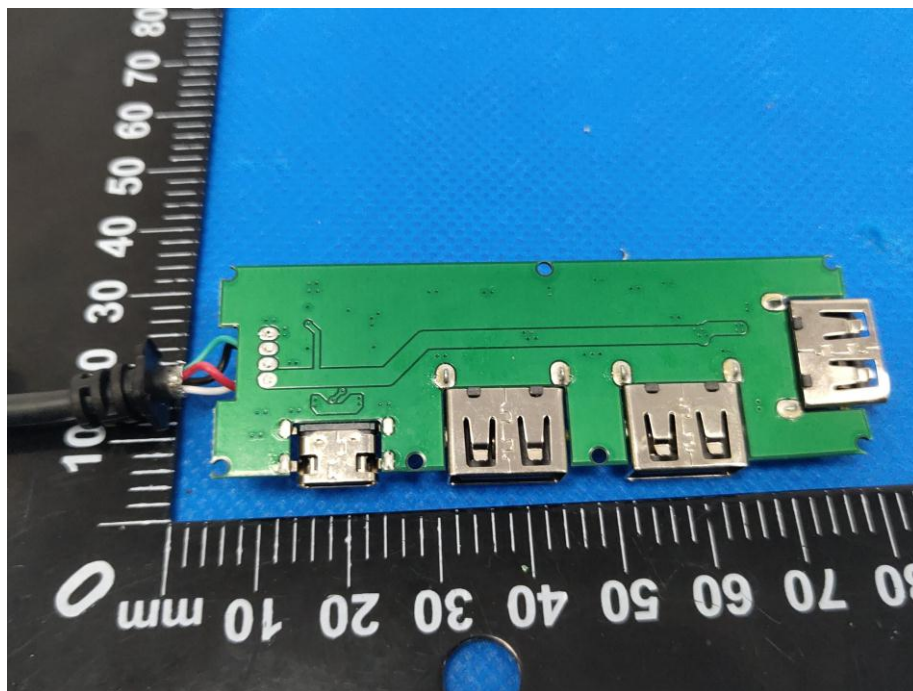

11. EUT Test Setup Photographs


Radiated emissions

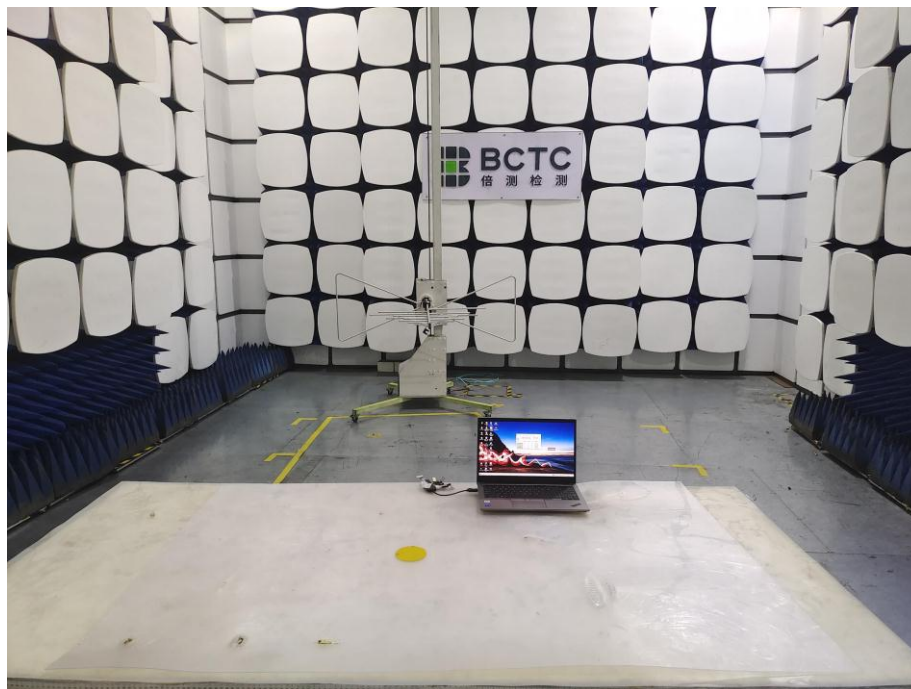

ESD



RS

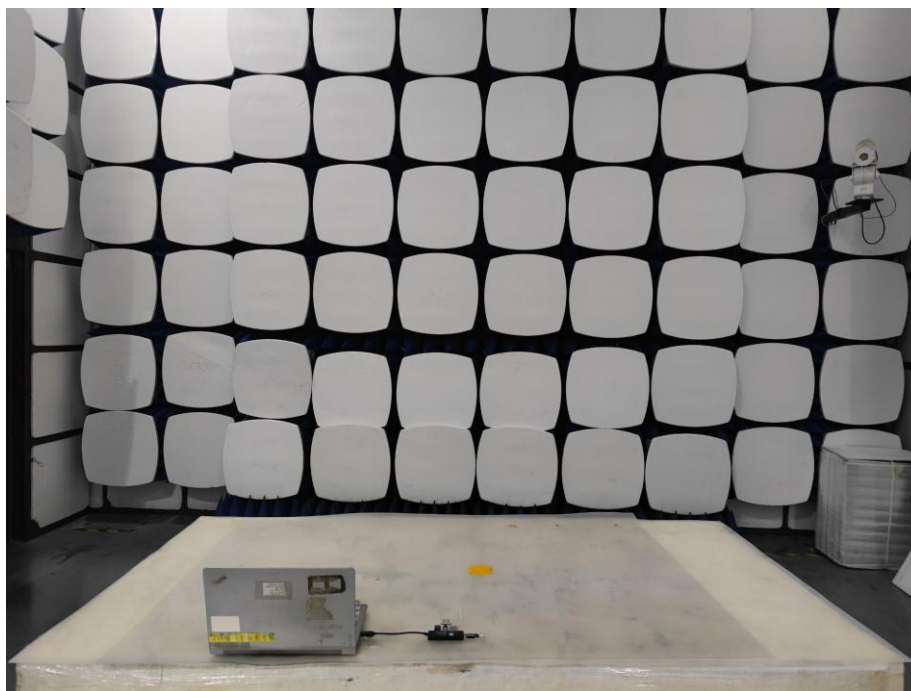

STATEMENT

The equipment lists are traceable to the national reference standards.

The test report can not be partially copied unless prior written approval is issued from our lab.

The test report is invalid without stamp of laboratory.

The test report is invalid without signature of person(s) testing and authorizing.

The test process and test result is only related to the Unit Under Test.

The quality system of our laboratory is in accordance with ISO/IEC17025.

If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

******* END *******