



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No..... : WTF22F12255593N
 Applicant..... : Shada BV
 Address..... : Molenmakershoek 28 NL-7328 JK Apeldoorn
 Manufacturer : Shada BV
 Address..... : Molenmakershoek 28 NL-7328 JK Apeldoorn
 Product Name..... : LED Panel
 Model No..... : 801088
 Test specification..... : In situ temperature measurement test (ISTMT) and TM-21-19
 Date of Receipt sample.... : 2022-12-19
 Date of Test..... : 2022-12-19 to 2023-01-12
 Date of Issue..... : 2023-01-12
 Test Report Form No..... : WPL-ISTMT-07A
 Test Result..... : **See following pages**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.


Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

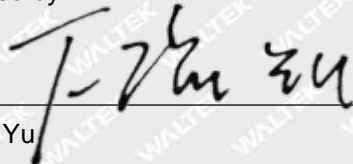
Finn Yu

Approved by:

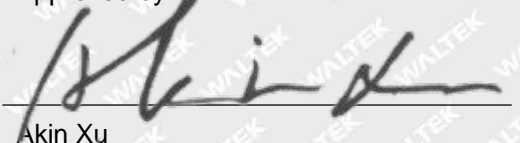
Akin Xu

**Trade Mark:**

N/A

General remarks:

"(See Attachment #)" refers to additional information appended to the report.

"(See remark #)" refers to a remark appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a comma (point) is used as the decimal separator.

Remark:

1. Measurement was conducted at voltage 230VAC 50Hz and at a stable ambient temperature $25^{\circ}\text{C}\pm 1^{\circ}\text{C}$.
2. Detail information for models covered in this report as below:

Item	Model	Ratings	CCT	LED Type	Driver
1	801088	220-240VAC, 50/60Hz, 40W	4000K	SMD 2835	LF-GIF040YS1000H

LED specification:

Model / Series	Manufacturer	V_F (V)	I_F (mA)	CCT (K)	Viewing angle (Deg)
XX- 2835XXXXXXXX- XXXX	Shenzhen Jingrui Photoelectric CO., Ltd.	8.7-9.6	100	2200- 6500K	120°

Possible test case verdicts:

- test case does not apply to the test object : N (Not applicable)
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)



1 - GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

General Description:

Product Type	LED Panel
Manufacturer	Shada BV
Product Model No.	801088
Product Brand Name	N/A
Rated Voltage/Frequency	220-240VAC, 50/60Hz
Rated Power	40W
Nominal CCT.....	4000K

1.2 Information of LED Light Source(tested in IES LM-80 Test Report)

Model No.	2835 COVER:XX-2835XXXXXXXX-XXXX
LED Type	SMD 2835
Manufacturer	Shenzhen Jingrui Photoelectric CO., Ltd.
Nominal CCT.....	2700K
Total Number of Test Units	75 pcs (25 pcs for each temperature)
Total Test Duration	9000 hours
Tested Driver Current	100mA
First Case Temperature	55 °C
Second Case Temperature	85 °C
Third Case Temperature	105 °C

1.3 Reference Standard

IEC 60598-1:2020 Luminaires - Part 1: General requirements and tests

IES LM-84-14 Measuring Luminous Flux and Color Maintenance of LED Lamps, Light Engines, and Luminaires---Annex A: measurement of in-situ conditions LED case temperature

IES TM-21-19 TECHNICAL MEMORANDUM: PROJECTING LONG-TERM LUMEN, PHOTON, AND RADIANT FLUX MAINTENANCE OF LED LIGHT SOURCES

IES LM-80-15 Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules

1.4 Test Facility

The test facility used by Waltek Testing Group (Foshan) Co., Ltd. is located at No. 13-19, 2/F, 2nd Building, Sunlink International Machinery City, Chencun Town, Shunde District, Foshan, Guangdong, China.

1.5 Test Summary

In-situ temperature measurement test (ISTMT) for one sample using IEC 60598-1, including sections 12.4.1.

Statement confirming the measurement method follows IES LM-84-14 Annex A.



1.6 Test Equipment

Equipment	Model/Type	Cal. Due. Date
AC Power Source	ALL POWER APW-150	--
Power meter	YOKOGAWA WT310E	2024-01-11
Multimeter	FLUKE 15B	2024-01-11
Temperature Recorder	Agilent 34970A	2024-01-11

2 - Temperature Measurement Data

The samples were operated until constant temperatures were obtained. A temperature was considered constant if the sample was operating for at least three hours and upon three successive readings - taken at 15 minute intervals - were within one degree and were not rising.

Thermocouples were attached at locations described in the results by means of a cement made of water glass and Fuller's earth, solder, or epoxy.

3 - Life Measurement Data

Test Method:

Lumen maintenance life of LED light source and LED lamp or luminaire (if any) is the elapsed operating time over which an LED light source maintains a given percentage of its initial light output. L70 in this report is the time (in hours) when the light output from the LED has dropped to 70% of its initial output. A lumen maintenance test report of LED light sources was provided by client to calculate the lumen maintenance life according to IES TM-21-19. The calculator was developed by Light Naturally, version date 2021-10-26, and temperature interpolation type.

The LED light source is LED package, array, or module which is tested in IES LM-80 test report. Final product means LED lamp or luminaire which the LED light source will be included. Ts is the temperature of the thermocouple attachment point on the LED light source package as defined by the manufacturer of the LED light source. The in situ temperature of LED light source used in final product was used to calculate the lumen maintenance life of final product, if any.

Reported L70: For a sample size of 20 units or more, luminous flux values must not be projected beyond 6 times the total test duration (in hours) of measured data. For a sample size of 10 units to 19 units, luminous flux values must not be projected beyond 5.5 times the total test duration of measured data.

All test data used in this report is from report No.: R2DG190402068-10-9000 which is issued by Bay Area Compliance Laboratories Corp. (Dongguan). (Laboratory), issue date: 2020-06-03.



4 - Appended-Test Data Sheet

4.1 ISTMT Test Result of Product

Ambient Temperature, °C :	25±1°C	Relative Humidity, % :	65%
Supply voltage:	230 V / 50 Hz	Type of thermocouples:	J
Test Product Model.	801088		
Test LED Model.	XX-2835XXXXXXXX-XXXX		
Test LED Driver Model.	LF-GIF040YS1000H		
Number of Driver / Product	One Lamp with a power supply		
Test Duration	≥3.5Hours		
Sample number	Test Location	Location Description	Test Result at 25°C (°C)
#1	101	Temperature for LED #1	47.1
	102	Temperature for LED #2	42.4
	103	Temperature for LED #3	46.8
	104 (Tc)	Temperature for LED Driver	57.8
LED drive current (Forward current of LEDs)*		87mA	
<p>*Note: Test instructions for Forward current of LEDs as below: There are 3 LED array connected in parallel within the product. Within each LED array, there are 4 strings connected in parallel. Within each strings, there are 4 LED chips connected in series. In total there are 48 LED chips used in the product. The average output current of driver measured by a multimeter is 1044mA. There are 3 LED array in parallel, and each LED array has 4 strings connected in parallel. Therefore, the current of each string is calculated to be 87mA (1044/3/4), which is the average forward current of LEDs. The current is the result of indirect test and calculation.</p>			



4.2 Test Data of LED Light Source

Test Data for 55°C Case Temperature		Test Data for 85°C Case Temperature		Test Data for 105°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
0	100.00%	0	100.00%	0	100.00%
1000	100.16%	1000	100.14%	1000	100.12%
2000	99.96%	2000	99.87%	2000	99.84%
3000	99.76%	3000	99.61%	3000	99.60%
4000	99.55%	4000	99.39%	4000	99.30%
5000	99.34%	5000	99.11%	5000	98.99%
6000	99.15%	6000	98.82%	6000	98.70%
7000	98.94%	7000	98.53%	7000	98.39%
8000	98.71%	8000	98.25%	8000	98.07%
9000	98.49%	9000	97.99%	9000	97.77%

4.3 Calculate Result of LED Light Source

Description of LED Light Source Tested (manufacturer, model, catalog number)		Manufacturer: Shenzhen Jingrui Photoelectric CO., Ltd. Model: 2835 Multiple Model: XX-2835XXXXXXX-XXXX LM-80 Report Number: R2DG190402068-10-9000					
Test Condition 1 - 55°C Case Temp		Test Condition 2 - 85°C Case Temp		Test Condition 3 - 105°C Case Temp			
Sample size	25	Sample size	25	Sample size	25		
Number of failures	0	Number of failures	0	Number of failures	0		
DUT drive current used in the test (mA)	100	DUT drive current used in the test (mA)	100	DUT drive current used in the test (mA)	100		
Test duration (hours)	9000	Test duration (hours)	9000	Test duration (hours)	9000		
Test duration used for projection (hour to hour)	4000 - 9000	Test duration used for projection (hour to hour)	4000 - 9000	Test duration used for projection (hour to hour)	4000 - 9000		
Tested case temperature (°C)	55	Tested case temperature (°C)	85	Tested case temperature (°C)	105		
α	2.1352E-06	α	2.8576E-06	α	3.1085E-06		
B	1.0041	B	1.0053	B	1.0055		
Reported L70(9k) (hours)	>54000	Reported L70(9k) (hours)	>54000	Reported L70(9k) (hours)	>54000		



4.4 Calculate Result of Product

Model: 801088	
In-Situ Inputs	
Drive current for each LED package/array/module (mA):	87
In-situ case temperature (T_c , °C):	47.1
Percentage of initial lumens to project to (%):	70
Interpolation Temperature	
$T_{s,1}$ (°C)	55.00
$T_{s,1}$ (K)	328.15
α_1	2.1352E-06
B_1	1.0041
$T_{s,2}$ (°C)	-
$T_{s,2}$ (K)	-
α_2	-
B_2	-
E_a/k_B	-
A	-
m_B	-
b_B	-
$T_{s,i}$ (°C)	47.10
$T_{s,i}$ (K)	320.25
α_i	2.1352E-06
B_0	1.0041
Reported L70(9k) (hours)	>54000
Additional Results (Note: B value means the failure data at the L data.)	
Reported L80 (hours):	>54000
Reported L90 (hours):	51000
Reported L70B50 (hours):	>54000
Reported L80B50 (hours):	>54000
Reported L90B50 (hours):	51000
Reported L70B20 (hours):	>54000
Reported L80B20 (hours):	>54000
Reported L90B20 (hours):	50000
Reported L70B10 (hours):	>54000
Reported L80B10 (hours):	>54000
Reported L90B10 (hours):	50000
Projected L70B50 (hours):	169000
Projected L80B50 (hours):	106000



Projected L90B50 (hours):	51000
Projected L70B10 (hours):	166000
Projected L80B10 (hours):	104000
Projected L90B10 (hours):	50000

WALTEK



Attachment 2: Photo document

Model: 801088

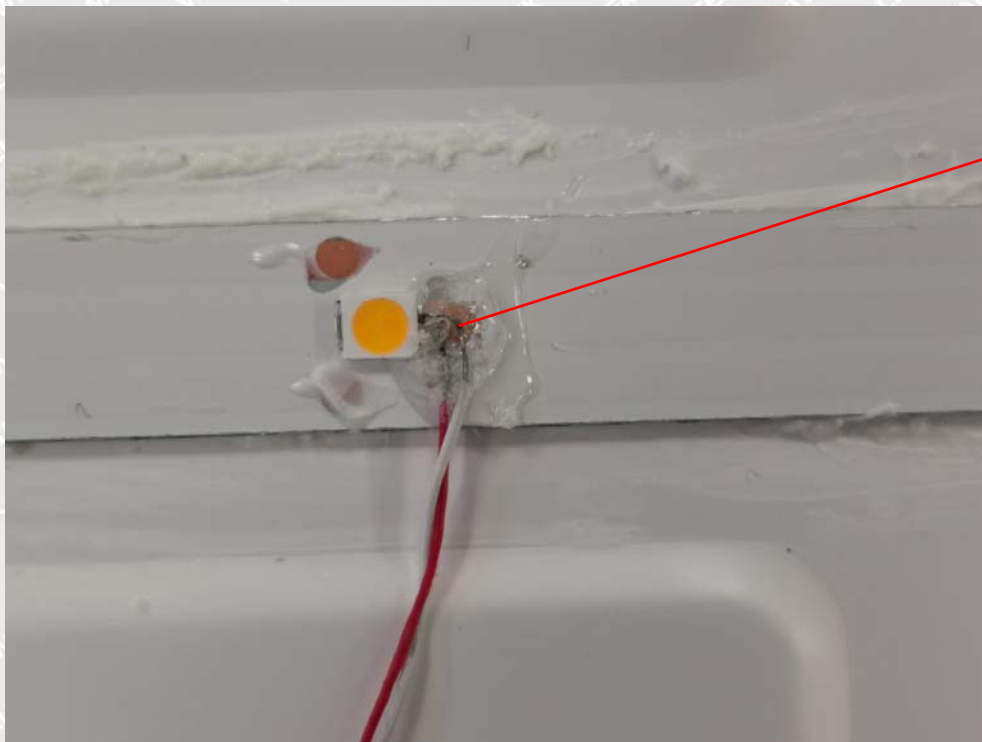


Photo 1

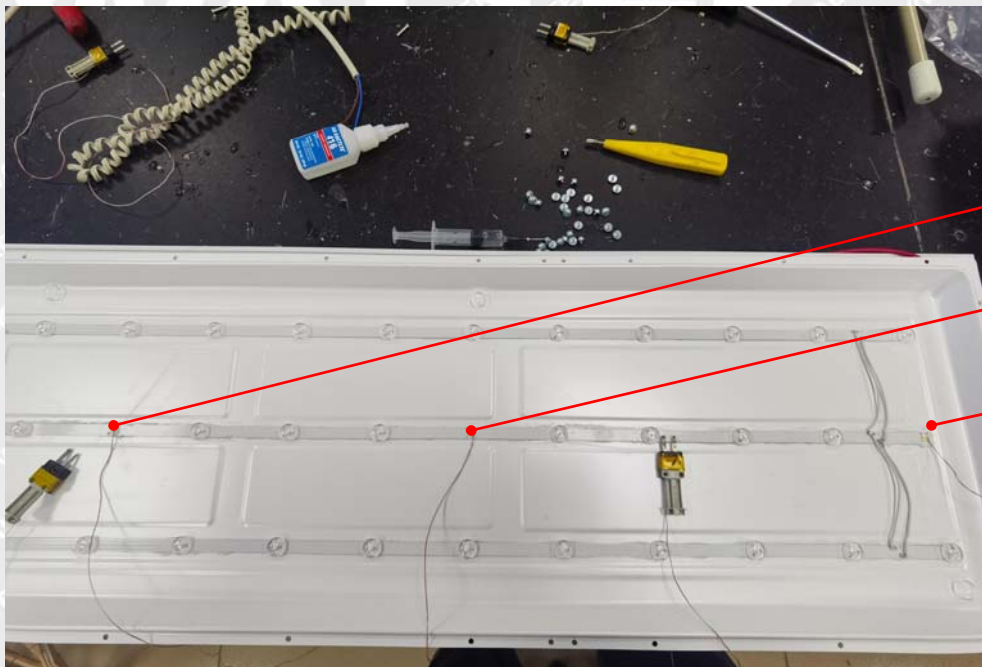


Photo 2

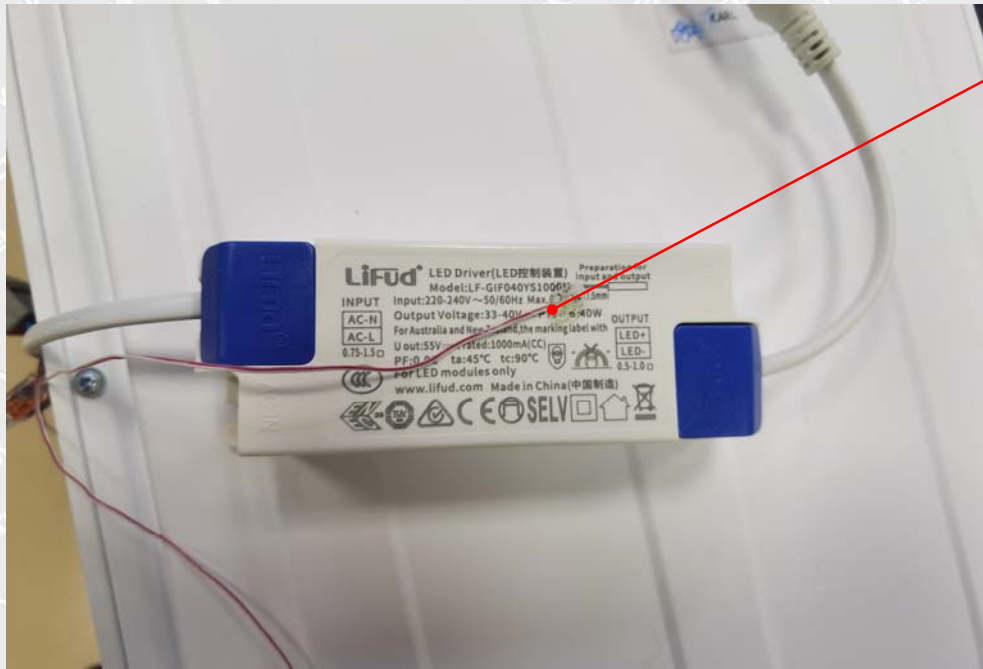


Photo 3



Photo 4



Photo 5



Photo 6

===== End of Report =====