

# TEST REPORT

Product Name:

Trademark:

Model Number:

Prepared For:

Address:

Manufacturer:

Address:

Prepared By:

Address:

Sample Received Date: Jun. 4, 2020

Sample tested Date: Jun. 4, 2020 to Jun.11, 2020

Issue Date: Jun.11, 2020

Report No.: BCTC2006110723-2E

Test Standards ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN  
301 489-3 V2.1.1 (2019-03)

Test Results PASS

Compiled by:



Kelsey Tan

Reviewed by:



Eric Yang

Approved by:

  
Zero Zhou/Manager

*The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.*

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b>	<b>4</b>
<b>2. TEST SUMMARY</b>	<b>5</b>
<b>3. MEASUREMENT UNCERTAINTY</b>	<b>6</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP</b>	<b>7</b>
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b>	<b>9</b>
5.1 Test Facility	9
5.2 Test Instrument Used	9
<b>6. CONDUCTED EMISSIONS</b>	<b>11</b>
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	12
<b>7. RADIATED EMISSIONS TEST</b>	<b>14</b>
7.1 Block Diagram Of Test Setup	14
7.2 Limits	14
7.3 Test Procedure	14
7.4 Test Results	15
<b>8. HARMONIC CURRENT EMISSION(H)</b>	<b>17</b>
8.1 Block Diagram of Test Setup	17
8.2 Limit	17
8.3 Test Procedure	17
8.4 Test Results	17
<b>9. VOLTAGE FLUCTUATIONS &amp; FLICKER(F)</b>	<b>18</b>
9.1 Block Diagram of Test Setup	18
9.2 Limit	18
9.3 Test Procedure	18
9.4 Test Results	18
<b>10. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA</b>	<b>19</b>
<b>11. ELECTROSTATIC DISCHARGE (ESD)</b>	<b>21</b>
11.1 Test Specification	21
11.2 Block Diagram of Test Setup	21
11.3 Test Procedure	21
11.4 Test Results	22
<b>12. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES(RS)</b>	<b>23</b>
12.1 Test Specification	23
12.2 Block Diagram of Test Setup	23
12.3 Test Procedure	24



12.4	Test Results .....	24
<b>13.</b>	<b>ELECTRICAL FAST TRANSIENTS/BURST (EFT) .....</b>	<b>25</b>
13.1	Test Specification .....	25
13.2	Block Diagram of EUT Test Setup .....	25
13.3	Test Procedure .....	25
13.4	Test Results .....	25
<b>14.</b>	<b>SURGES IMMUNITY TEST .....</b>	<b>26</b>
14.1	Test Specification .....	26
14.2	Block Diagram of EUT Test Setup .....	26
14.3	Test Procedure .....	26
14.4	Test Result .....	26
<b>15.</b>	<b>CONTINUOUS INDUCED RF DISTURBANCES (CS) .....</b>	<b>27</b>
15.1	Test Specification .....	27
15.2	Block Diagram of EUT Test Setup .....	27
15.3	Test Procedure .....	27
15.4	Test Result .....	27
<b>16.</b>	<b>VOLTAGE DIPS AND INTERRUPTIONS (DIPS) .....</b>	<b>28</b>
16.1	Test Specification .....	28
16.2	Block Diagram of EUT Test Setup .....	28
16.3	Test Procedure .....	28
16.4	Test Result .....	28
<b>17.</b>	<b>EUT PHOTOGRAPHS .....</b>	<b>29</b>
<b>18.</b>	<b>EUT TEST SETUP PHOTOGRAPHS .....</b>	<b>32</b>

(Note: N/A means not applicable)

## 1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2006110723-2E	Jun.11,2020	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55032	Conducted emissions from the AC mains power ports	Pass
EN 55032	Asymmetric mode conducted emissions	N/A <sup>1</sup>
EN 55032	Conducted differential voltage emissions	N/A <sup>2</sup>
EN 55032	Radiated emissions	Pass
EN 61000-3-2	Harmonic current emission(H)	N/A <sup>3</sup>
EN 61000-3-3	Voltage fluctuations & flicker(F)	N/A <sup>4</sup>

IMMUNITY		
Standard	Test Item	Test result
IEC 61000-4-2	Electrostatic discharge (ESD)	Pass
IEC 61000-4-3	Continuous RF electromagnetic field disturbances(RS)	Pass
IEC 61000-4-4	Electrical fast transients/burst (EFT)	N/A <sup>4</sup>
IEC 61000-4-5	Surges	N/A <sup>4</sup>
IEC 61000-4-6	Radio frequency, common mode	N/A <sup>4</sup>
IEC 61000-4-11	Voltage dips and interruptions (DIPS)	N/A <sup>4</sup>

Remark:

1. Applicable to ports listed above and intended to connect to cables longer than 3 m.
2. The Product has no antenna port.
3. The Product belongs to Class A, and its power is less than 75W, so it deems to fulfil this standard without testing.
4. The EUT is powered by the DC only, the test item is not applicable.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Test item	Value (dB)
Conducted Emission (150kHz-30MHz)	3.20
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	W2-B
Model Description:	N/A
Wireless Charger:	Support
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	110kHz-205kHz
Antenna installation:	Loop coil antenna
Ratings:	DC 5V

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

No	Device	Brand	Model	Series No.	Data Cable	Power
1.	Adapter	UGreen	CD122	---	---	---

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Test Mode

Test item	Test Mode	Test Voltage
Conducted emissions from the AC mains power ports (150KHz-30MHz) Class B	Wireless Charging	AC230V/50Hz *
Radiated emissions(30MHz-1GHz) Class B	Wireless Charging	AC230V/50Hz *
Electrostatic discharge (ESD) <input checked="" type="checkbox"/> HCP & VCP: $\pm 4\text{kV}$ <input checked="" type="checkbox"/> Air Discharge: $\pm 8\text{kV}$ <input checked="" type="checkbox"/> Contact Discharge: $\pm 4\text{kV}$	Wireless Charging	AC230V/50Hz
Continuous RF electromagnetic field disturbances(RS) <input checked="" type="checkbox"/> 80MHz-6000MHz , 3V/m,80% Front, Rear, Left, Right H/V	Wireless Charging	AC230V/50Hz
All test mode were tested and passed, only Conducted Emissions, Radiated Emissions shows (*) is the worst case mode which were recorded in this report.		



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
ISN	HPX	ISN T800	S1509001	Jun. 13, 2019	Jun. 12, 2020
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\


Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 19, 2018	Jun. 18, 2020
Receiver	R&S	ESRP	101154	Jun. 13, 2019	Jun. 12, 2020
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
Horn Antenna	SCHWARZBECK	BBHA9120 D	1201	Jun. 22, 2019	Jun. 21, 2020
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Electrostatic discharge Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKISUI	KES4201A	UH002321	Jul. 12, 2019	Jul. 10, 2020

Continuous RF electromagnetic field disturbances Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419B	GB42421440	Jun. 17, 2019	Jun. 16, 2020
Power sensor	Keysight	E9300A	US39211305	Jun. 17, 2019	Jun. 16, 2020
Power sensor	Keysight	E9300A	US39211659	Jun. 17, 2019	Jun. 16, 2020
Amplifier	SKET	HAP-801000M-250W	\	Jun. 25, 2019	Jun. 24, 2020
Amplifier	SKET	HAP-801000M-75W	\	Jun. 25, 2019	Jun. 24, 2020
Amplifier	SKET	HAP-801000M-50W	\	Jun. 25, 2019	Jun. 24, 2020
Stacked double Log.-Per. Antenna	Schwarzbeck	STLP 9129	077	\	\
Field Probe	Narda	EP-601	80256	Jul. 07, 2019	Jul. 06, 2020
Signal Generator	Agilent	N5181A	MY50143748	Jun. 13, 2019	Jun. 12, 2020
Software	SKET	EMC-S	1.2.0.18	\	\

## 6. CONDUCTED EMISSIONS

### 6.1 Block Diagram Of Test Setup

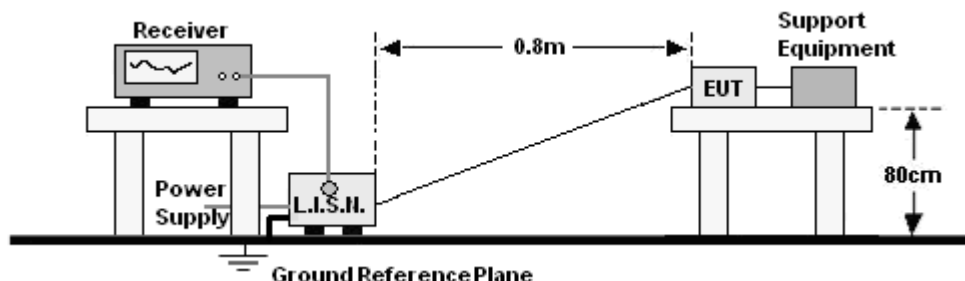

### 6.2 Limit

**Limits for Conducted emissions at the mains ports of Class B MME**

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56*	56 to 46*
0,50 to 5	56	46
5 to 30	60	50


Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

## 6.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode	Wireless Charging	Remark:	N/A

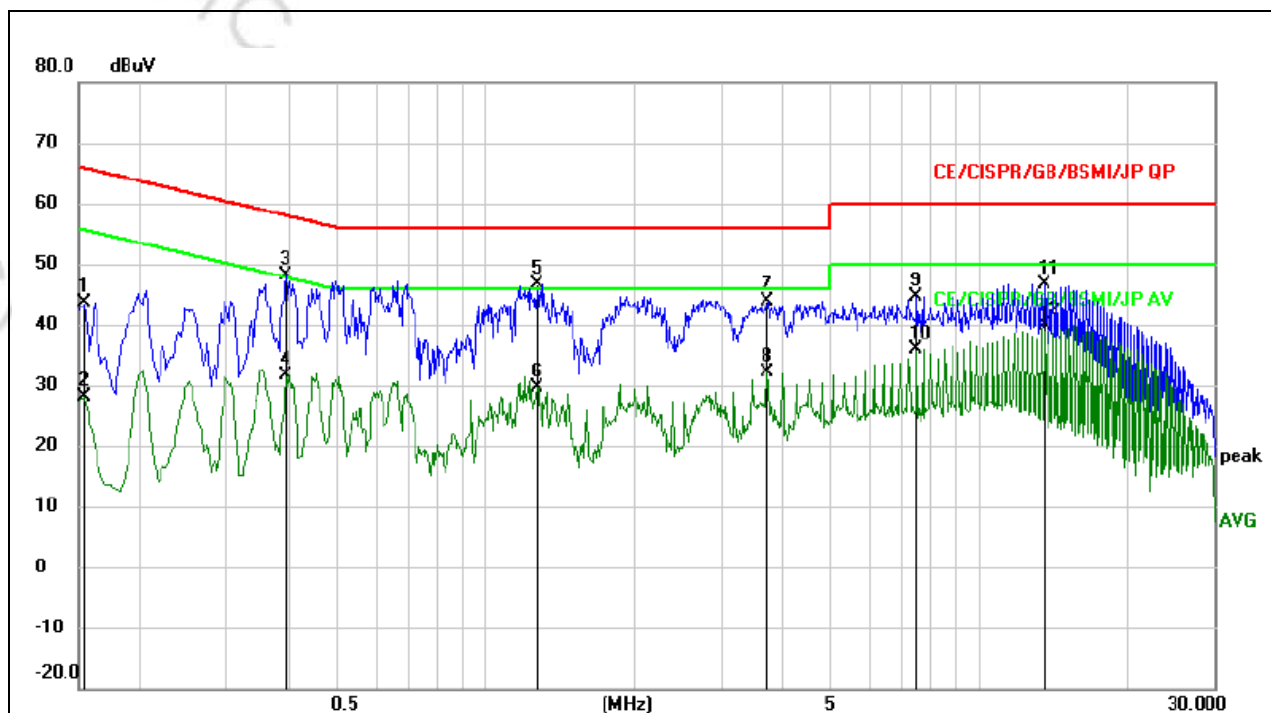


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	34.12	9.52	43.64	65.79	-22.15	QP	
2		0.1539	18.61	9.52	28.13	55.79	-27.66	AVG	
3		0.3940	38.58	9.50	48.08	57.98	-9.90	QP	
4		0.3940	22.23	9.50	31.73	47.98	-16.25	AVG	
5	*	1.2740	37.07	9.58	46.65	56.00	-9.35	QP	
6		1.2740	20.00	9.58	29.58	46.00	-16.42	AVG	
7		3.7380	34.14	9.71	43.85	56.00	-12.15	QP	
8		3.7380	22.35	9.71	32.06	46.00	-13.94	AVG	
9		7.4780	34.79	9.72	44.51	60.00	-15.49	QP	
10		7.4780	26.25	9.72	35.97	50.00	-14.03	AVG	
11		13.6220	37.03	9.70	46.73	60.00	-13.27	QP	
12		13.6220	30.11	9.70	39.81	50.00	-10.19	AVG	

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode	Wireless Charging	Remark:	N/A

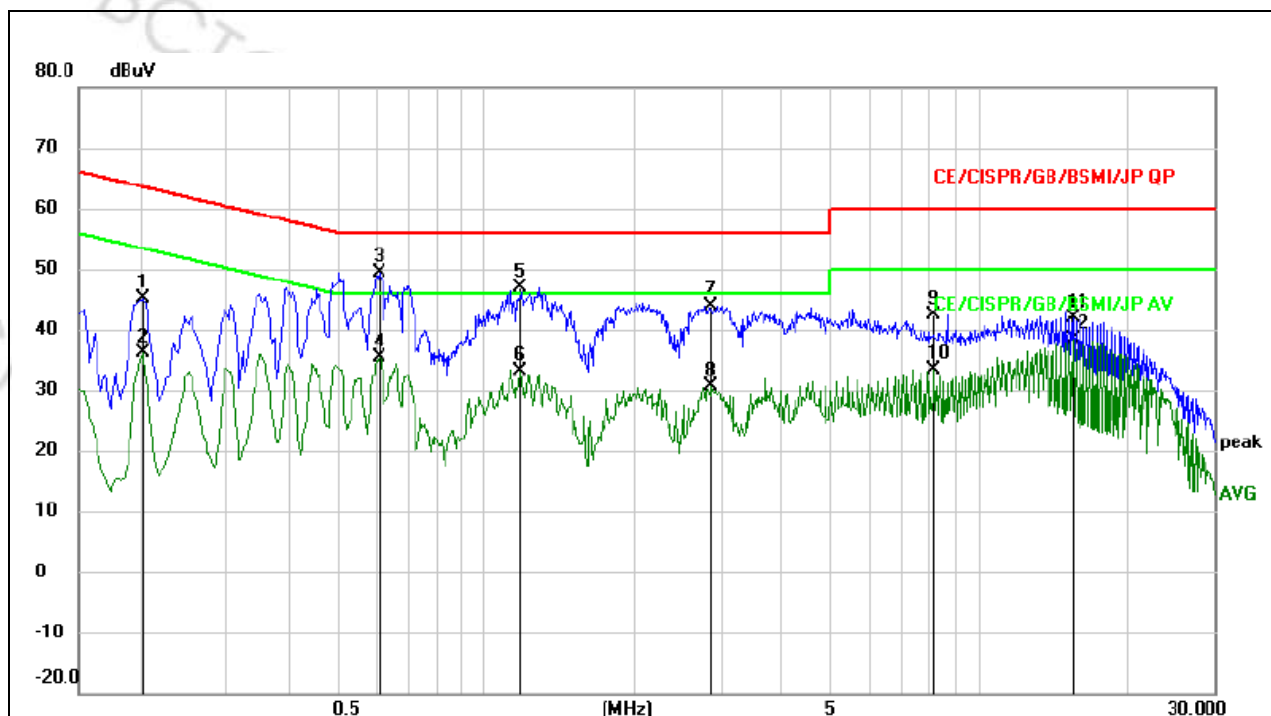

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2020	35.62	9.46	45.08	63.53	-18.45	QP	
2		0.2020	26.57	9.46	36.03	53.53	-17.50	AVG	
3	*	0.6100	39.52	9.96	49.48	56.00	-6.52	QP	
4		0.6100	25.41	9.96	35.37	46.00	-10.63	AVG	
5		1.1780	37.40	9.57	46.97	56.00	-9.03	QP	
6		1.1780	23.44	9.57	33.01	46.00	-12.99	AVG	
7		2.8820	34.35	9.65	44.00	56.00	-12.00	QP	
8		2.8820	20.87	9.65	30.52	46.00	-15.48	AVG	
9		8.1420	32.69	9.71	42.40	60.00	-17.60	QP	
10		8.1420	23.64	9.71	33.35	50.00	-16.65	AVG	
11		15.4780	32.12	9.71	41.83	60.00	-18.17	QP	
12		15.4780	28.70	9.71	38.41	50.00	-11.59	AVG	

## 7. RADIATED EMISSIONS TEST

### 7.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

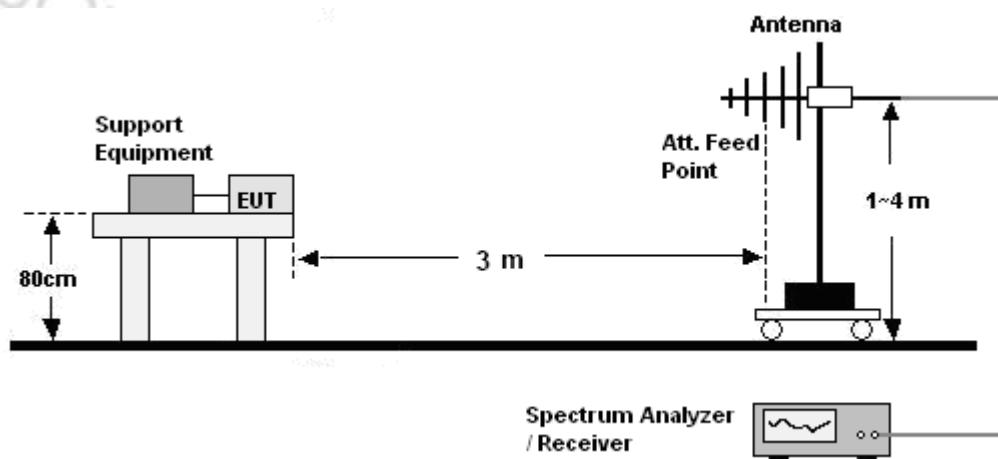

### 7.2 Limits

Frequency (GHz)	limit above 1G at 3m dB( $\mu$ V/m)	
	Average	peak
1-3	56	76
3-6	60	80

**Note:** The lower limit shall apply at the transition frequencies.

### 7.3 Test Procedure


30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 0.8 above the ground in a semi anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.



## 7.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Polarization :	Horizontal
Test Mode	Wireless Charging	Remark:	N/A

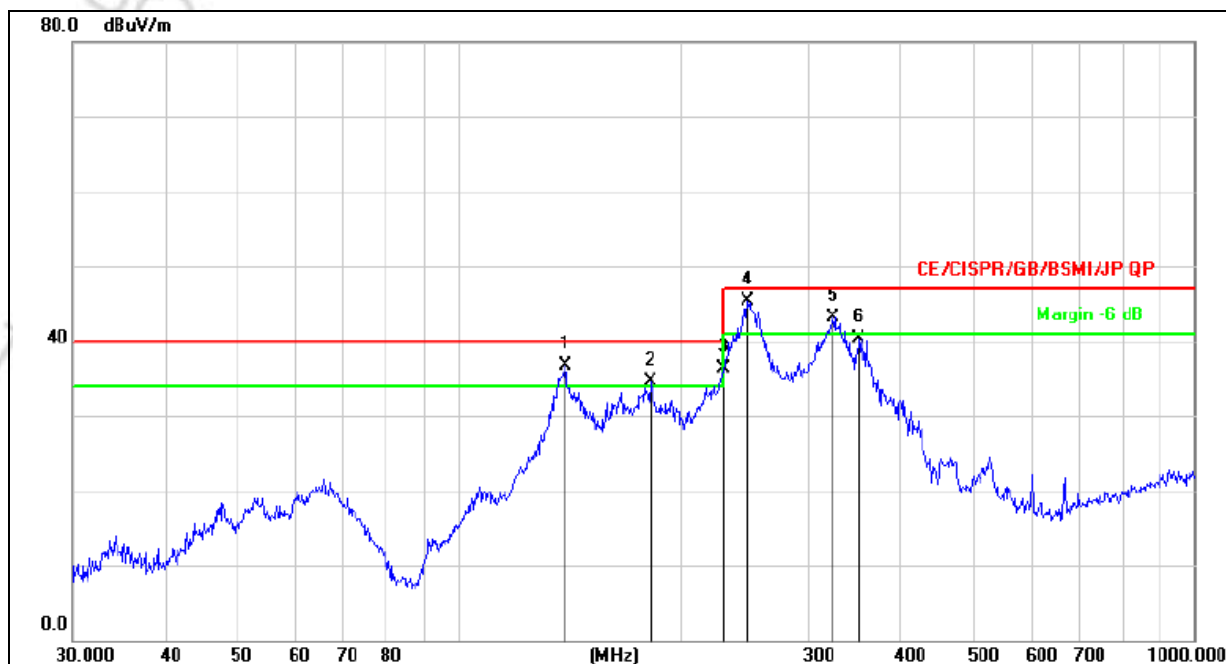

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	139.8508	55.60	-18.85	36.75	40.00	-3.25	QP
2	!	182.5592	51.94	-17.42	34.52	40.00	-5.48	QP
3	!	229.2931	52.00	-15.63	36.37	40.00	-3.63	QP
4	*	247.6819	60.45	-15.20	45.25	47.00	-1.75	QP
5	!	323.3204	56.06	-12.96	43.10	47.00	-3.90	QP
6		350.4768	52.52	-12.22	40.30	47.00	-6.70	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101Kpa	Polarization :	Vertical
Test Mode	Wireless Charging	Remark:	N/A



Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	56.3947	51.27	-15.53	35.74	40.00	-4.26	QP
2		66.0341	51.18	-17.29	33.89	40.00	-6.11	QP
3	*	138.1229	56.22	-18.74	37.48	40.00	-2.52	QP
4		184.4898	49.65	-17.29	32.36	40.00	-7.64	QP
5	!	248.6519	59.29	-15.18	44.11	47.00	-2.89	QP
6		435.5898	44.33	-10.29	34.04	47.00	-12.96	QP



## 8. HARMONIC CURRENT EMISSION(H)

### 8.1 Block Diagram of Test Setup

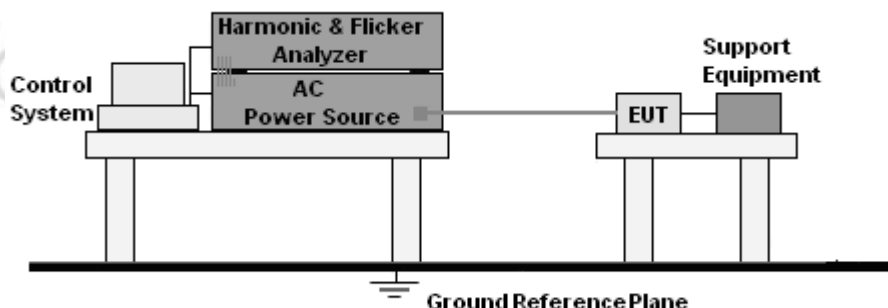

### 8.2 Limit

EN 61000-3-2:2014 Clause 7.

### 8.3 Test Procedure


- The Product was placed on the top of a non-conductive table above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The correspondent test program of test instrument to measure the current harmonics emanated from Product was chosen. The measure time shall be not less than the time necessary for the Product to be exercised.

### 8.4 Test Results

The EUT is powered by the DC only, the test item is not applicable.

## 9. VOLTAGE FLUCTUATIONS & FLICKER(F)

### 9.1 Block Diagram of Test Setup

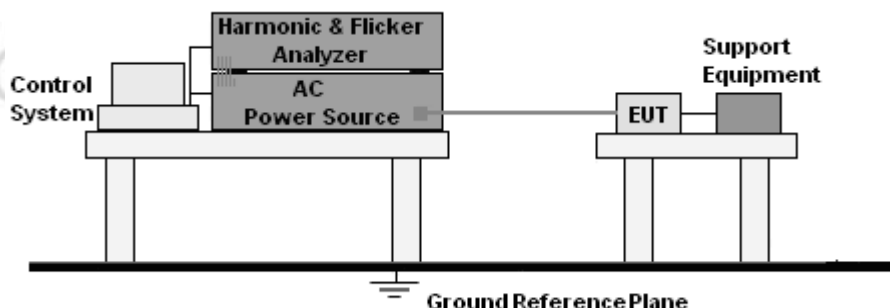

### 9.2 Limit

EN 61000-3-3:2013 Clause 5.

### 9.3 Test Procedure

- The Product was placed on the top of a non-conductive table above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick test, the measure time shall include that part of whole operation cycle in which the Product produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

### 9.4 Test Results

The EUT is powered by the DC only, the test item is not applicable.

## 10. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA

According To EN 301489 -3standard, The General Performance Criteria As Following:

Criteria	During the test	After the test
<b>A</b>	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
<b>B</b>	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

## PERFORMANCE FOR TT

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

## PERFORMANCE FOR TR

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

## PERFORMANCE FOR CT

The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an Acknowledgement (ACK) or Not Acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

## PERFORMANCE FOR CR


The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

## 11. ELECTROSTATIC DISCHARGE (ESD)

### 11.1 Test Specification

<b>Test Port</b>	: Enclosure port
<b>Discharge Impedance</b>	: 330 ohm / 150 pF
<b>Discharge Mode</b>	: Single Discharge
<b>Discharge Period</b>	: one second between each discharge

### 11.2 Block Diagram of Test Setup

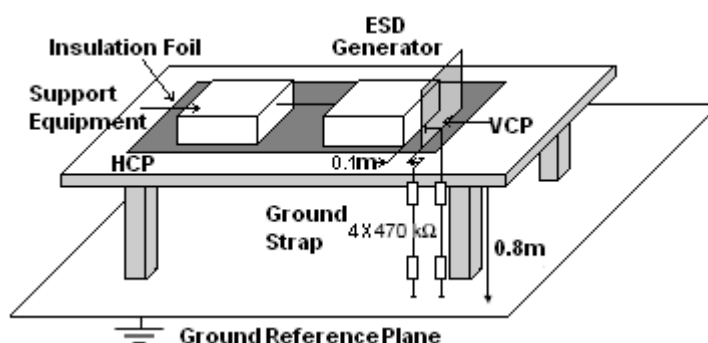

### 11.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

## 11.4 Test Results

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101Kpa	Test Mode:	Wireless Charging

Mode	Air Discharge (Test result)								Contact Discharge (Test result)								Observation	Perform Criteria	Judgment
Test level (kV)	2		4		8		15		2		4		6		8				
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-			
HCP									A	A	A	A					CT,CR	A	PASS
VCP									A	A	A	A					CT,CR	A	PASS
enclosure	A	A	A	A	A	A											CT,CR	A	PASS
USB Port									A	A	A	A					CT,CR	A	PASS

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:  
Direct / Indirect (HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at each point. Air discharges: Minimum 10 times (Positive/Negative) at each point.
- 3) N/A - denotes test is not applicable in this test report
- 4) There was not any unintentional transmission in standby mode


## 12. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES(RS)

### 12.1 Test Specification


<b>Test Port</b>	: Enclosure port
<b>Step Size</b>	: 1%
<b>Modulation</b>	: 1kHz, 80% AM
<b>Dwell Time</b>	: 1 second
<b>Polarization</b>	: Horizontal & Vertical

### 12.2 Block Diagram of Test Setup

Below 1GHz:

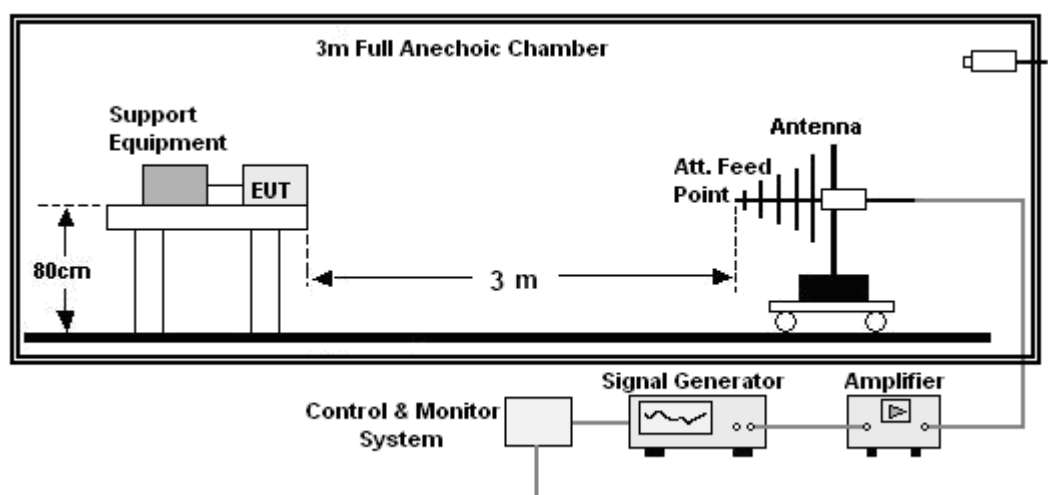

Above 1GHz:

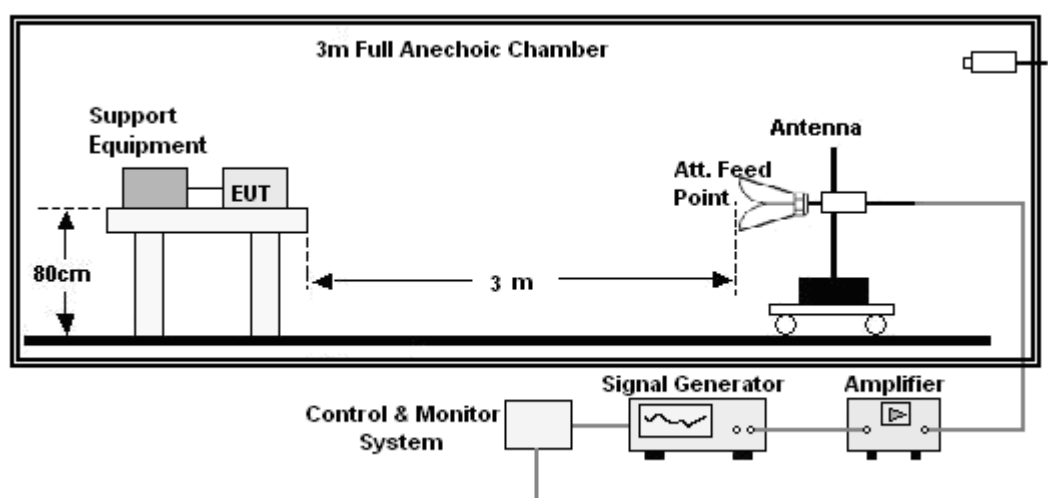



## 12.3 Test Procedure

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- The frequency range is swept from 80MHz to 6000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond, but should not exceed 5 s at each of the frequencies during the scan.
- The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.
- For Broadcast reception function: Group 2 not apply in this test.

## 12.4 Test Results

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101KPa	Test Mode:	Wireless Charging

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform Criteria	Test Result	Judgment
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	A	PASS
			Rear				
			Left				
			Right				

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report.
- 3) There was no change operated with initial operating during the test.
- 4) There was not any unintentional transmission in standby mode




## 13. ELECTRICAL FAST TRANSIENTS/BURST (EFT)

### 13.1 Test Specification

<b>Test Port</b>	: input AC / DC power port
<b>Impulse Frequency</b>	: 5 kHz
<b>Impulse Wave-shape</b>	: 5/50 ns
<b>Burst Duration</b>	: 15 ms
<b>Burst Period</b>	: 300 ms
<b>Test Duration</b>	: 2 minutes per polarity

### 13.2 Block Diagram of EUT Test Setup

For input AC / DC power port:

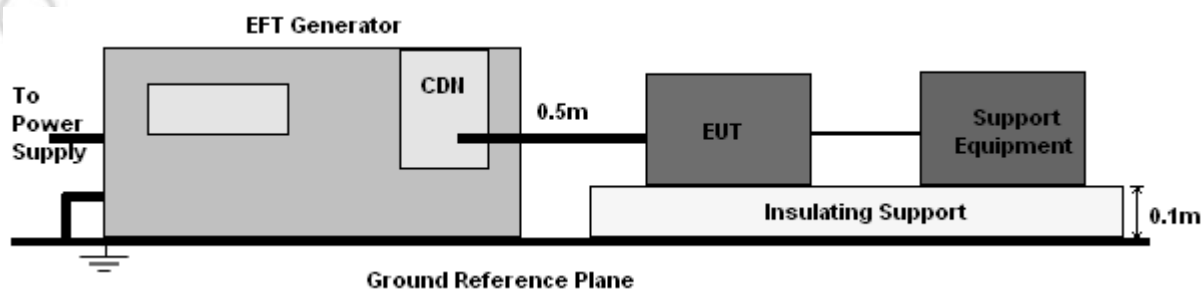

### 13.3 Test Procedure

- The Product and support units were located on a non-conductive table above ground reference plane.
- A 0.5m-long power cord was attached to Product during the test.

### 13.4 Test Results


The EUT is powered by the DC only, the test item is not applicable.

## 14. SURGES IMMUNITY TEST

### 14.1 Test Specification

<b>Test Port</b>	: input AC. / DC power port
<b>Wave-Shape</b>	: Open Circuit Voltage - 1.2 / 50 us Short Circuit Current - 8 / 20 us
<b>Pulse Repetition Rate</b>	: 1 pulse / min.
<b>Phase Angle</b>	: 0° / 90° / 180° / 270°
<b>Test Events</b>	: 5 pulses (positive & negative) for each polarity

### 14.2 Block Diagram of EUT Test Setup

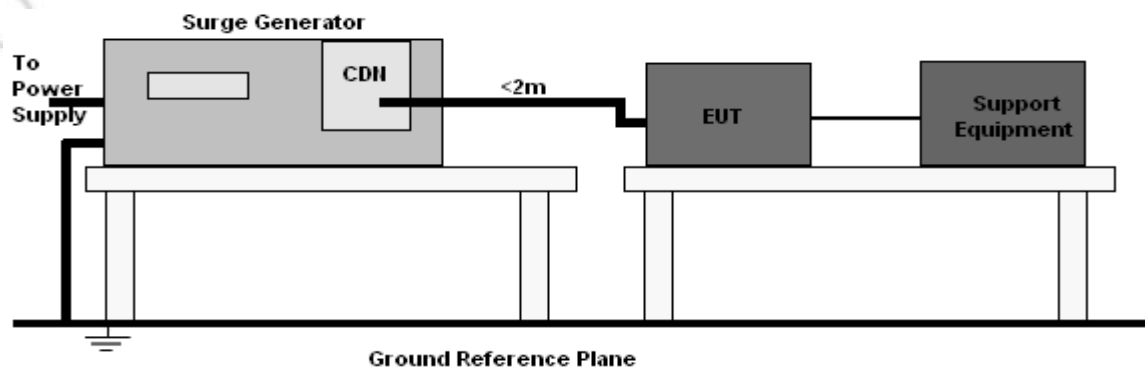

### 14.3 Test Procedure

- The surge is to be applied to the Product power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave.
- The power cord between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter). Interconnection line between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 14.4 Test Result

The EUT is powered by the DC only, the test item is not applicable.


## 15. CONTINUOUS INDUCED RF DISTURBANCES (CS)

### 15.1 Test Specification

<b>Test Port</b>	: input AC / DC power port
<b>Step Size</b>	: 1%
<b>Modulation</b>	: 1kHz, 80% AM
<b>Dwell Time</b>	: 1 second

### 15.2 Block Diagram of EUT Test Setup

For input AC / DC power port:

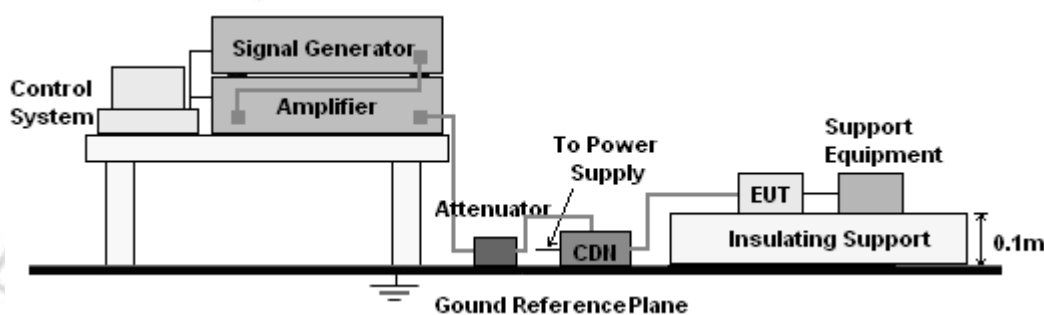

### 15.3 Test Procedure

For input AC/ DC power port:

- The Product and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.
- The frequency range is swept from 150 kHz to 10MHz, 10MHz to 30MHz, 30MHz to 80MHz with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the Product to be able to respond.

### 15.4 Test Result


The EUT is powered by the DC only, the test item is not applicable.

## 16. VOLTAGE DIPS AND INTERRUPTIONS (DIPS)

### 16.1 Test Specification

Test Port	: input AC / DC power port
Phase Angle	: 0°, 180°
Test cycle	: 3 times

### 16.2 Block Diagram of EUT Test Setup

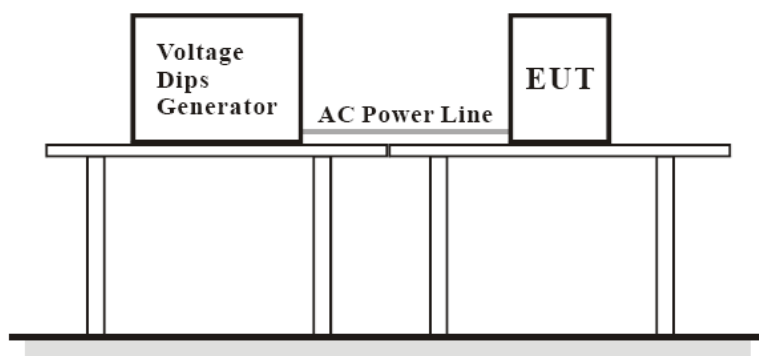

### 16.3 Test Procedure

- The Product and support units were located on a non-conductive table above ground floor.
- Set the parameter of tests and then perform the test software of test simulator.
- Conditions changes to occur at 0 degree crossover point of the voltage waveform.

### 16.4 Test Result

The EUT is powered by the DC only, the test item is not applicable.

## 17. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2







**EUT Photo 3**



**EUT Photo 4**

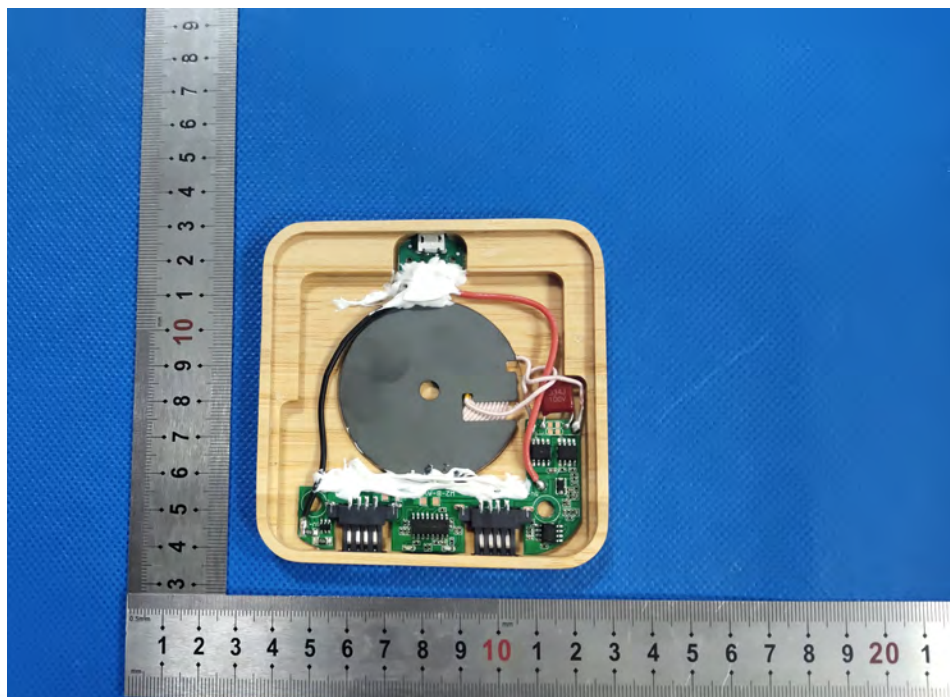

**EUT Photo 5**

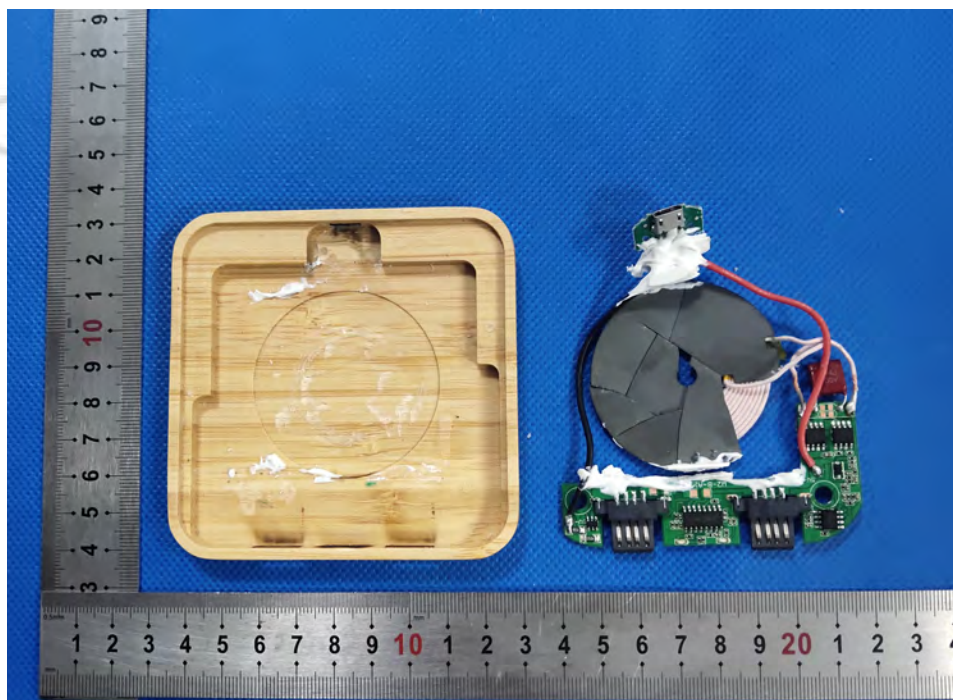


## 18. EUT TEST SETUP PHOTOGRAPHS

### Conducted emissions



### Radiated emissions

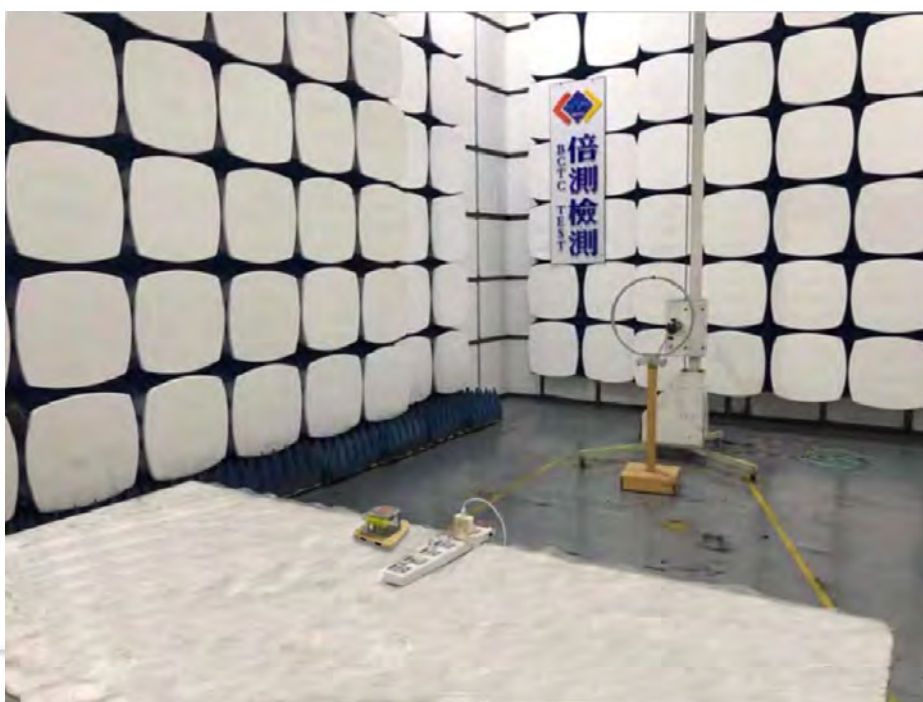



ESD



RS



\*\*\*\*\* END OF REPORT \*\*\*\*\*