

TECHNICAL REPORT



Report No: EMC1712200-01
File reference No: 2017-12-28

Applicant:

Product: Bluetooth Neckband Earphone

Brand Name: N/A

Model No: BTH-30

Test Standards: ETSI EN301 489-1 v 2.1.1 (2017-02)
ETSI EN301 489-17 v 3.1.1 (2017-02)

Test result: The EMC testing has been performed on the submitted samples and found in compliance with council RE Directive 2014/53/EU

Approved By

Jack Chung

Jack Chung

EMC Manager

Dated: December 28, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Table of Contents

1.0	General Details	4
1.1	Notes	4
1.2	Test Lab Details	4
1.3	Details of Applicant	4
1.4	Application Details	4
1.5	Test Item	5
1.6	List of Ports	6
1.7	Ancillary and Peripheral Devices	6
1.8	Test Standards	7
1.9	Test By	7
2.0	Technical Test	8
2.1	Summary of Test Result	8
2.2	Test Report	8
2.3	Measurement Uncertainty	10
	Clause 8.2 Emission Test- Radiated Emissions	11
	Clause 8.4 AC Line Conducted Emissions	21
	Clause 8.5 Harmonic Current Emissions	24
	Clause 8.6 Flicker and Voltage Fluctuation	26
	Clause 9.2 Immunity Test- Radiated, RF Electromagnetic Fields	29
	Clause 9.3 Electrostatic Discharge	30
	Clause 9.4 Fast Transient Common Mode	31
	Clause 9.5 RF Common Mode	32
	Clause 9.7 Voltage Dips	33
	Clause 9.8 Surge Common & differential Mode (1-phase)	34
3.0	CE Label	35
4.0	Photograph-Test Set up	36
4.1	Photograph-Conducted Emission Test Set up	36
4.2	Photograph- Radiated Emission Test Set up	37
4.3	Photograph- EFT/B, Surge, Voltage Dips Test Set up	38
4.4	Photograph- Flicker Test Set up	38
4.5	Photograph- RS Emission Test Set up	39
4.6	Photograph- ESD Test Set up	39
4.7	Photograph- CS Test Set up	40
5.0	Photograph-EUT	41
6.0	Test Equipments	44

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer, Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The TIMEWAY Lab does not assume Responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the TIMEWAY Lab.

1.2

Testing Laboratory

SHENZHEN TIMEWAY TESTING LABORATORIES.

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel: +86 755 83448688 Fax :+86 755 83442996

Internet: www.timeway-lab.com

Site on File With the Federal Communications and Commission – United States

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.3 Details of Applicant

Name: Richen Industrial Co., Ltd.

Address: Rm.1203, Building 4 East, Saige Technopark, Huaqiang North Road, Futian District, Shenzhen, China

1. 4 Application Details

Date of Receipt of Test Item: December 26, 2017

Date of Test: December 26, 2017~ December 28, 2017

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: EMC1712200-01
Date: 2017-12-28



Page 5 of 45

1.5 Test Item

Manufacturer:

Address:

Brand Name: N/A

Model No.: BTH-30

Additional Model No.: N/A

Additional Brand Name: N/A

Description: Bluetooth Neckband Earphone

Additional Information

Frequency: 2402-2480MHz for Bluetooth

Number of Channels: 79 channel for Bluetooth

Channel Spacing: 1MHz for Bluetooth

Antenna Designation: PCB Antenna and the maximum Gain of this antenna is 0dBi;

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Extreme Temp. Tolerance: -20°C to 40°C

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1.6 List of Ports

Port	Description	Classification ¹	Maximum cable Length	Cable Type
N/A				

Note ¹ports shall be classified as ac power, dc power or signal/control port.

²Maximum cable length corresponding to the appropriate ports shall be classified as $\leq 3\text{m}$ or $> 3\text{m}$.

1.7 Ancillary and Peripheral Devices

Description	Designation	Serial No.	Manufacturer
N/A	-	--	--

List of Peripheral Devices Used for Testing

Description	Designation	Serial No.	Manufacturer
N/A			

Note: An Equipment (apparatus) used in connection with a receiver or transmitter is considered as an ancillary Equipment (apparatus) if:

- The equipment is intended for use in conjunction with a receiver or transmitter to provide additional operational and/or control features to the radio equipment. (e.g. to extend control to another position or location); and
- The equipment cannot be used on a stand alone basis to provide user functions independently of a receiver or transmitter; and
- The receiver or transmitter to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer, Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1.8 Test Standards

ETSI EN 301 489-1 v 2.1.1 (2017-02)
ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements;
Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU
ETSI EN 301 489-17 v 3.1.1 (2017-02)
ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 17: Specific conditions for Broadband Data Transmission Systems;
Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

1.9 Test or Witness Test Engineering

Test By: _____
Printing Name: Terry Tang



The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



2. Technical Test

2.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "Passed" if all Measurements are "Passed")	Pass

2.2 Test Report

Emission (EMI)

EMI Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Conducted Interference Voltage	AC Mains	ETSI EN 301489-1: 2017-02 Clause 8.4	EN 55032:2015	Refer to Section 4	Complies	Applicable
Radiated Interference Field Strength 30~6000MHz	Enclosure	ETSI EN 301489-1: 2017-02 Clause 8.2	EN 55032:2015	Refer to Section 4	Complies	Not Applicable
Harmonic Current Emissions	AC Mains Input Port	ETSI EN 301489-1: 2017-02 Clause 8.5	EN 61000-3-2:2014	Refer to Section 4	Complies	Not Applicable
Flicker & Voltage Fluctuation	AC Mains Input Port	ETSI EN 301489-1: 2017-02 Clause 8.6	EN 61000-3-3:2013	Refer to Section 4	Complies	Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Immunity (EMS)

EM3 Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Electronic Discharge (ESD)	Enclosure	ETSI EN 301489-1: 2017-02 Clause 9.3	EN 61000-4-2: 2009	Refer to Section 4	Complies	Applicable
RF-Electro-Magnetic Field (80-6000MHz)	Enclosure	ETSI EN 301489-1: 2017-02 Clause 9.2	EN 61000-4-3: 2006	Refer to Section 4	Complies	Applicable
Fast Transients, Burst	Power Line AC/DC	ETSI EN 301489-1: 2017-02 Clause 9.4	EN 61000-4-4: 2012	Refer to Section 4	Complies	Applicable
Surge	Power Line (1 phase)	ETSI EN 301489-1: 2017-02 Clause 9.8	EN 61000-4-5: 2014	Refer to Section 4	Complies	Applicable
Transients & Surge Vehicular Environment	Power Line (Car Charge)	ETSI EN 301489-1: 2017-02 Clause 9.6	ISO 7637-1/2:1990 (12/24VDC)	N/A	Complies	Not Applicable
RF Common Mode (0.15-80MHz)	Power Line AC/DC signal Lines	ETSI EN 301489-1: 2017-02 Clause 9.5	EN 61000-4-6: 2014	Refer to Section 4	Complies	Applicable
Vol. Dips, Interruptions & Fluctuations (AC Power)	Input & Output AC Ports only	ETSI EN 301489-1: 2017-02 Clause 9.7	EN 61000-4-11 2004	Refer to Section 4	Complies	Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



N/A=Not Applicable

-Performance criteria A for immunity tests with phenomena of a continuous nature;

Communication between the EUT and Bluetooth device in the front of pings should not drop during the test.

-Performance criteria B for immunity tests with phenomena of a transient nature;

N/A

-Performance criteria C for immunity tests with power interruptions exceeding a certain time.

N/A

Note: For details see subclause 6.1 ETSI EN 301 489-17

A Switching power supply was selected by the test lab for full tests. When export, no power supply is provided to the EUT.

Switching Power Supply Model: BI 05A-050100-I1;

Rating: Input: 100-240V~, 50/60Hz, 0.3A, Output: DC5V, 1A

Switching Power Supply Manufacturer: BI

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Uncertainty
Conducted Emissions	3.6dB
Radiated Emissions	4.7dB (Below 1GHz); 5.0dB (above 1GHz)
Harmonic Current Emission	1.2%
Voltage Fluctuations and Flicker	1.5%
Electrostatic Discharge	The waveform of voltage: 1.6%; Time: 3.1%
RF Electromagnetic Field	3.1dB
Electrical Fast Transients	The waveform of voltage: 1.5%; Time: 2.9%
Surge	The waveform of voltage: 1.5%; Time: 2.9%
RF Common Mode	3.9dB
Voltage Dips and Interruptions	The waveform of voltage: 1.5%; Time: 2.9%

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.2 Emission Test – Radiated Emission

This test assesses that ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

According to EMC basic standard (EN 55032)

Measurement according to EMC basic standard, The test results correspond to the 3m Semi-Anechoic Chamber results.

The EUT and its simulators are placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to EN55032: 2015 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1 GHz using a receiver bandwidth of 120kHz.

Radiated emissions were investigated over the frequency range from 30MHz to 6 GHz

Radiated Emission was performed at an antenna to EUT distance of 3 meters.

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer, supplier or other persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client, enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report, the SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Emission Test

Block diagram of Test setup

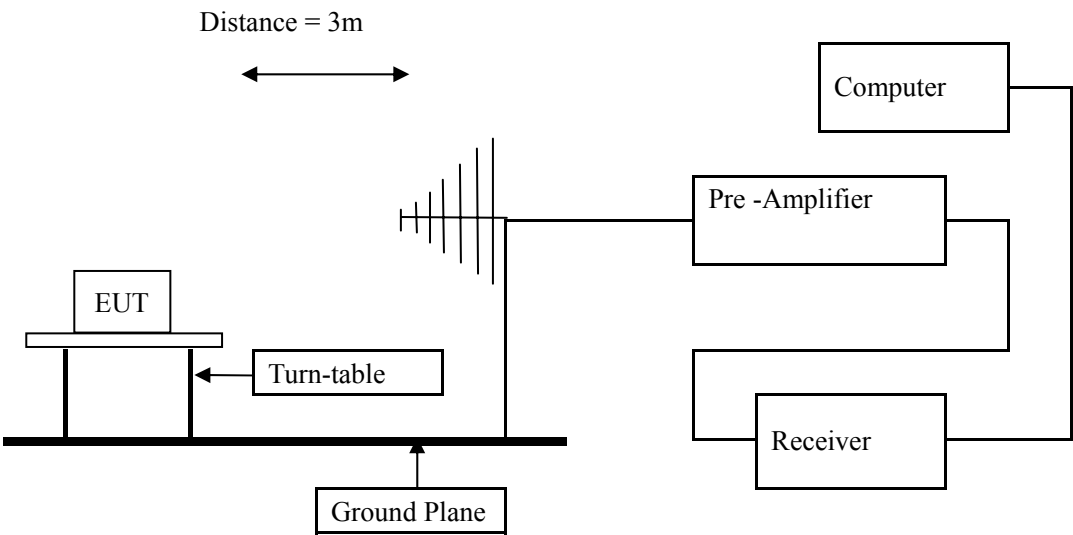

Power line conducted Emission Limit

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)
30-230	10/3	30.0/40.0
230-1000	10/3	37.0/47.0
1000-3000	3	50 (AV) /70 (PK)
3000-6000	3	54 (AV) /74 (PK)

Note: The lower limit shall apply at the transition frequencies

Test result:

Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charing battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

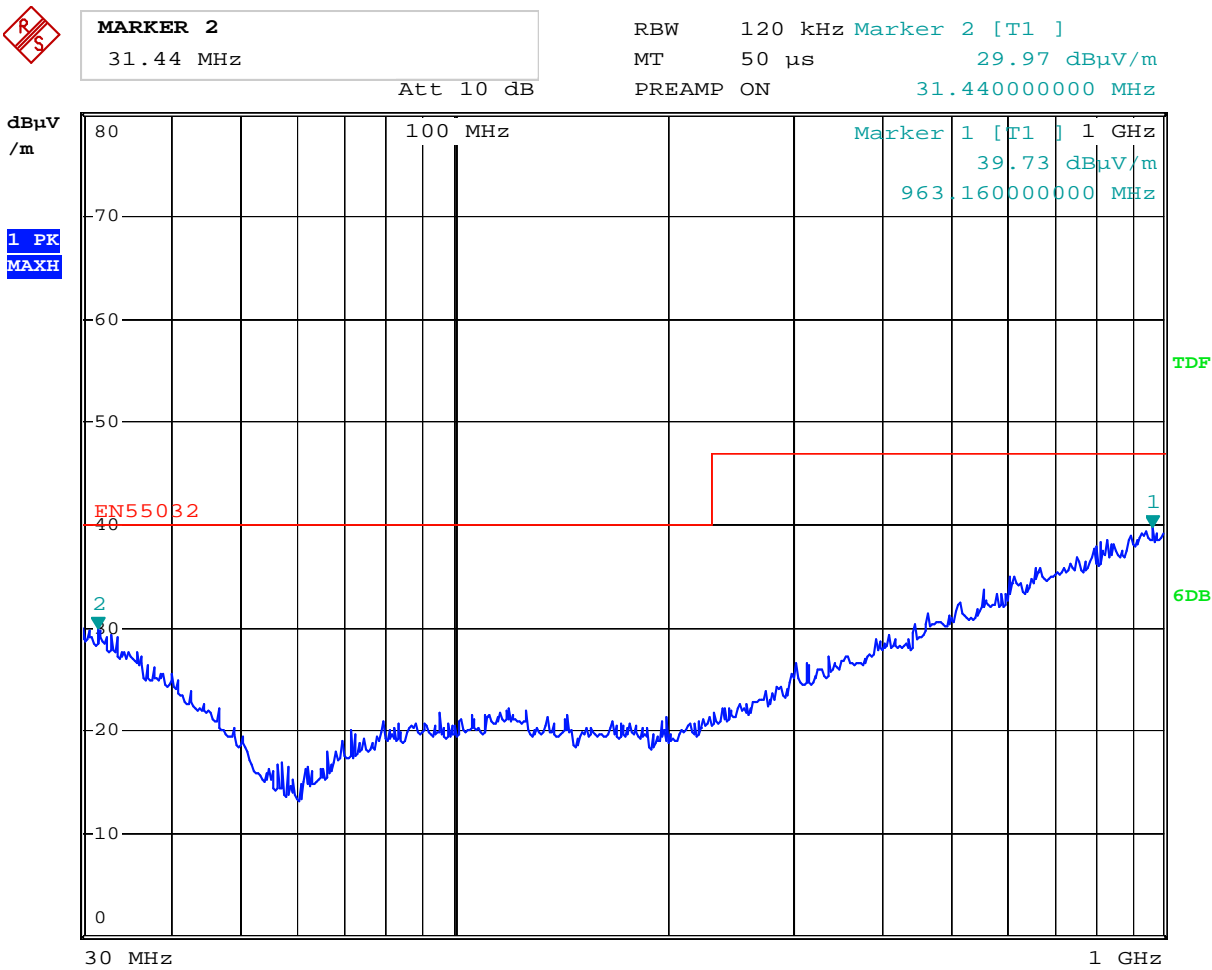

Date: 27.DEC.2017 11:15:14

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
31.440	29.97	H	40.00
963.160	39.73	H	47.00

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



B: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charing battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

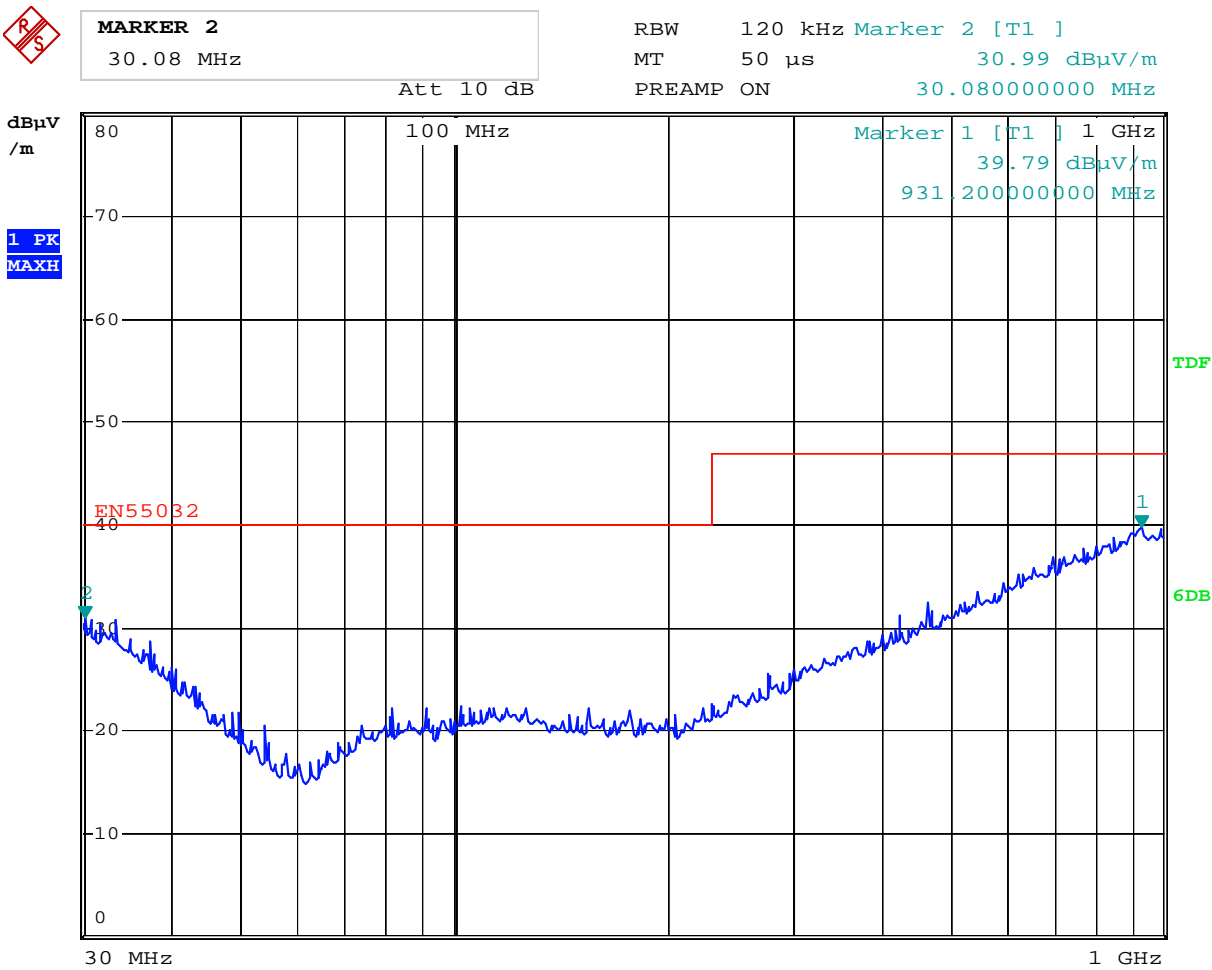

Date: 27.DEC.2017 11:16:46

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
30.080	30.99	V	40.00
931.200	39.79	V	47.00

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



C: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 55%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by Bluetooth

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

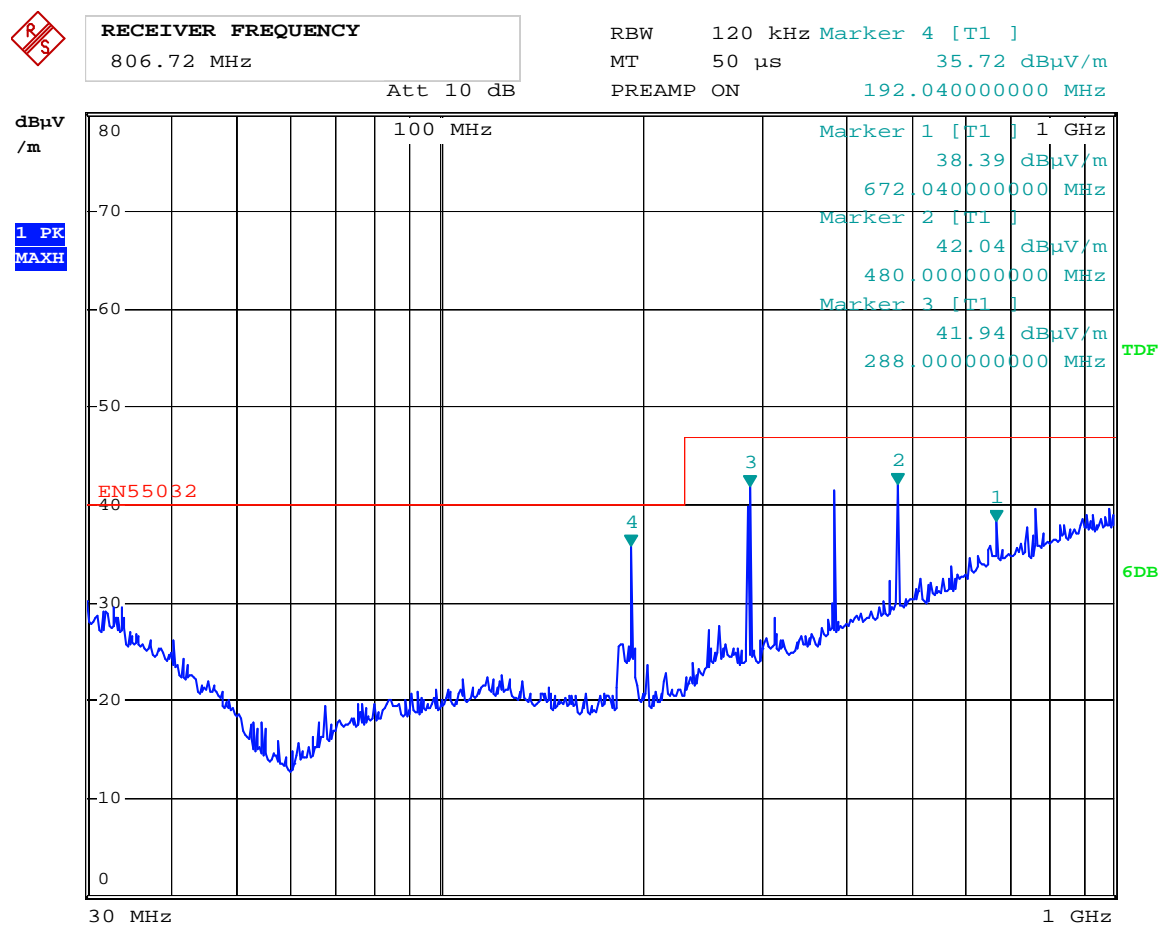

Date: 27.DEC.2017 11:26:14

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
192.040	35.72	H	40.00
672.040	38.39	H	47.00
480.000	42.04	H	47.00
288.000	41.94	H	47.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2018-03-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE BY THE DOCUMENT OWNER.



D: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by Bluetooth

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

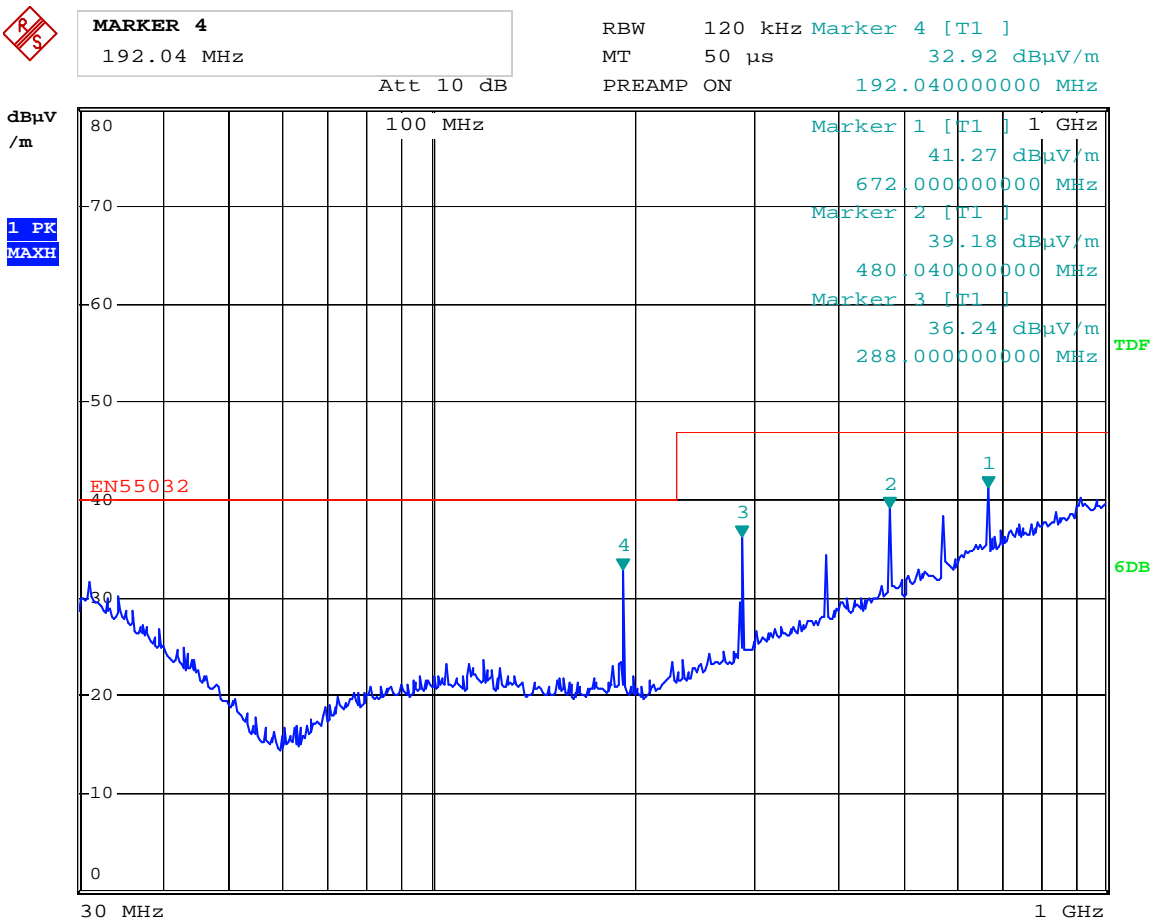

Date: 27.DEC.2017 11:23:55

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
192.040	32.92	V	40.00
672.000	41.27	V	47.00
480.040	39.18	V	47.00
288.000	36.24	V	47.00

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



E: Radiated Disturbance (1000MHz---6000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charing Battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

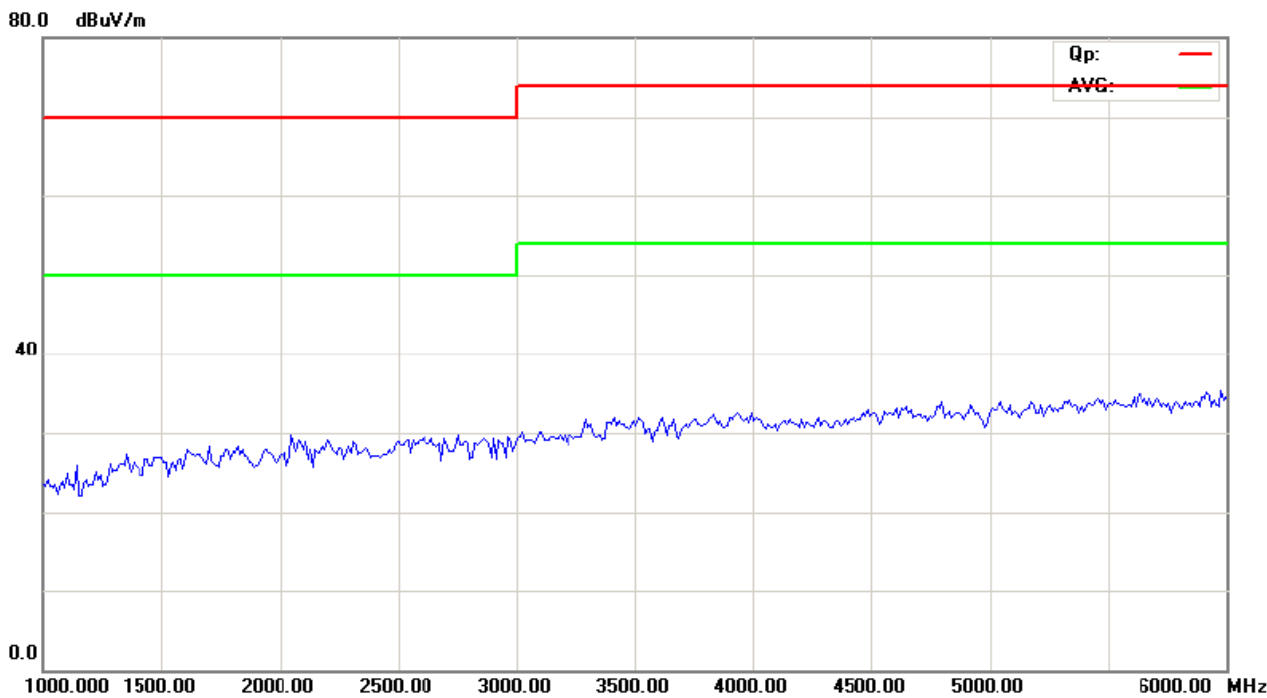

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
--	--	H	--
--	--	H	--

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



F: Radiated Disturbance (1000MHz---6000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charing Battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

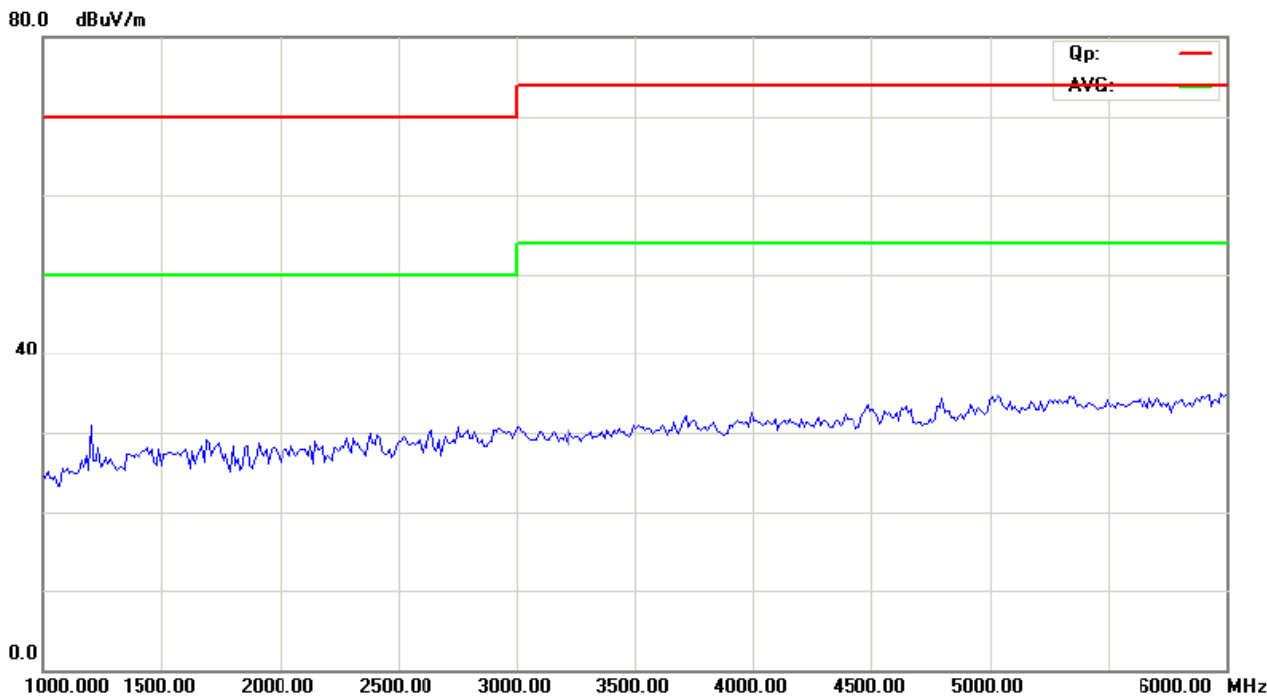

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
--	--	V	--
--	--	V	--

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



G: Radiated Disturbance (1000MHz---6000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Communication by Bluetooth

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

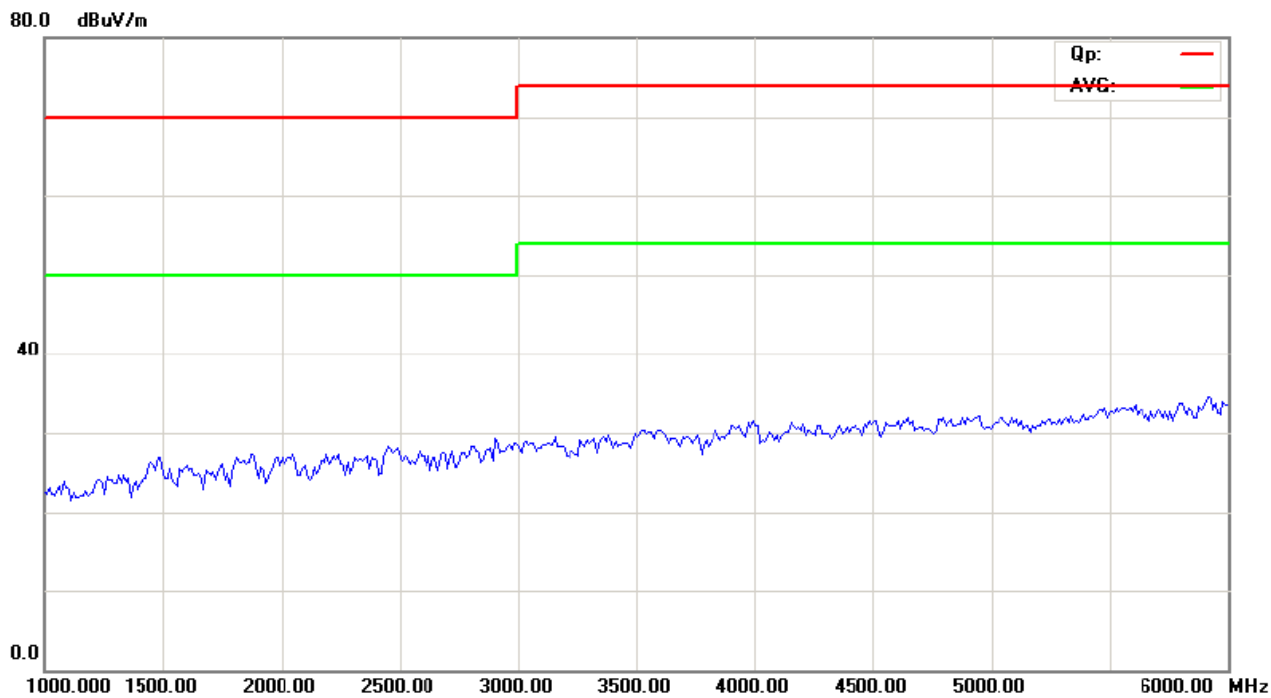

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
--	--	H	--
--	--	H	--

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

THIS DOCUMENT WAS REDACTED WITH THE PRODUCTIP REDACTION TOOL ON 2018-03-05. AT THE TIME OF GENERATING THE DOCUMENT THE ORIGINAL DOCUMENT WAS AVAILABLE ALSO. THE ORIGINAL CAN ONLY BE MADE AVAILABLE BY THE DOCUMENT OWNER.



H: Radiated Disturbance (1000MHz---6000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Communication by Bluetooth

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

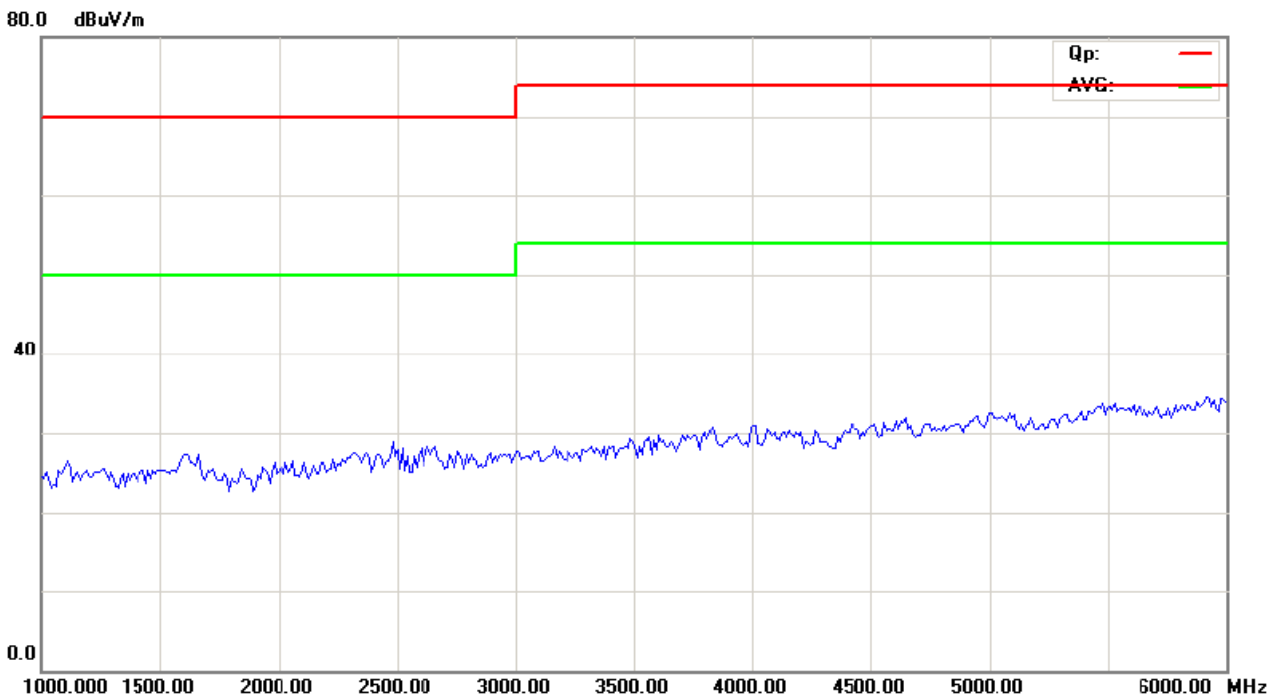

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
--	--	V	--
--	--	V	--

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.4 AC Line Conducted Emissions

According to EMC Basic Standard (EN 55032)

1. For the table top EUT the distance to the reference ground plane (wall) should be 40 cm.
2. AC input line plugged into LISN.

Results

Power Line (L, N)	EUT Operating mode or operating mode no.	Detector (Peak, AV, QP)	Additional (scan-) Information (e.g. Pre-test Fast scan, Maxhold, Final measurement.)	Result (Passed / Failed)
L=>GND	Communication by BT	QP & AV	--	Pass
N=>GND	Communication by BT	QP & AV	--	Pass

The frequency spectrum from 0.15MHz to 30MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 kHz

Temperature: 25°C
Humidity: 53% RH

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by Bluetooth and Charging

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

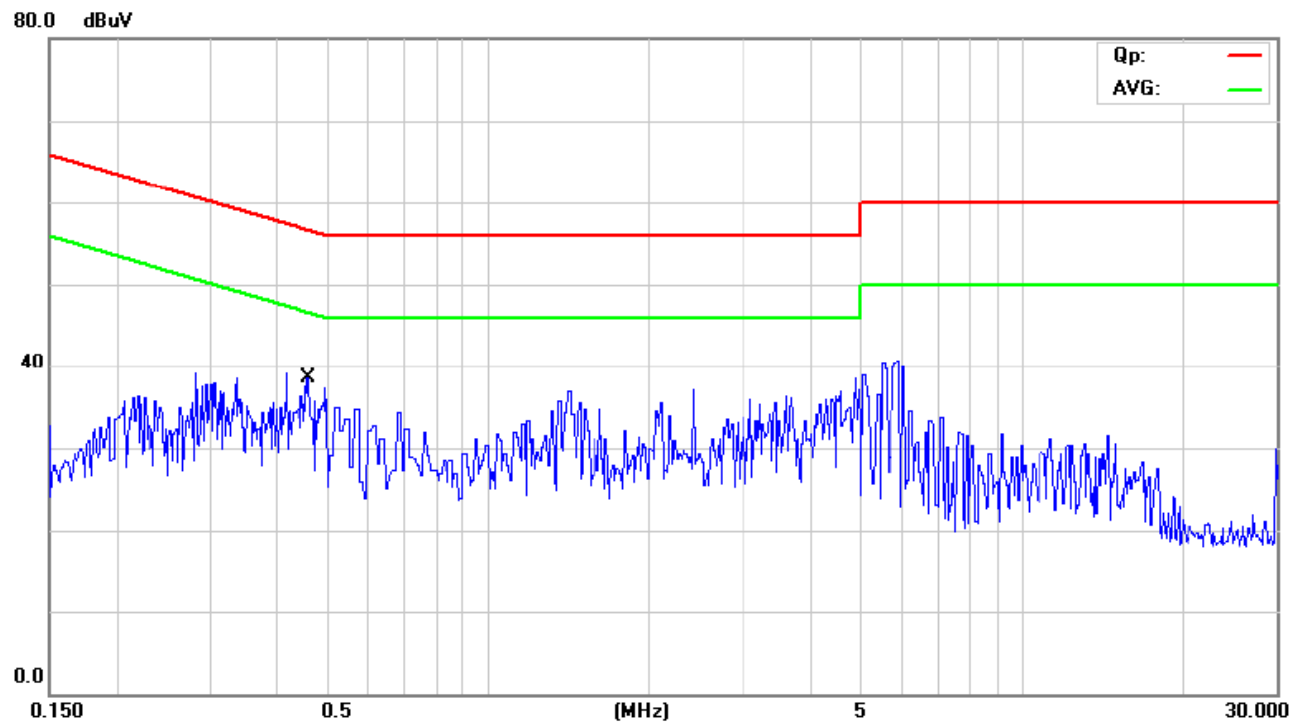

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.4550	10.80	10.22	21.02	56.78	-35.76	QP	
2		0.4550	-11.60	10.22	-1.38	46.78	-48.16	AVG	

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by Bluetooth and Charging

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

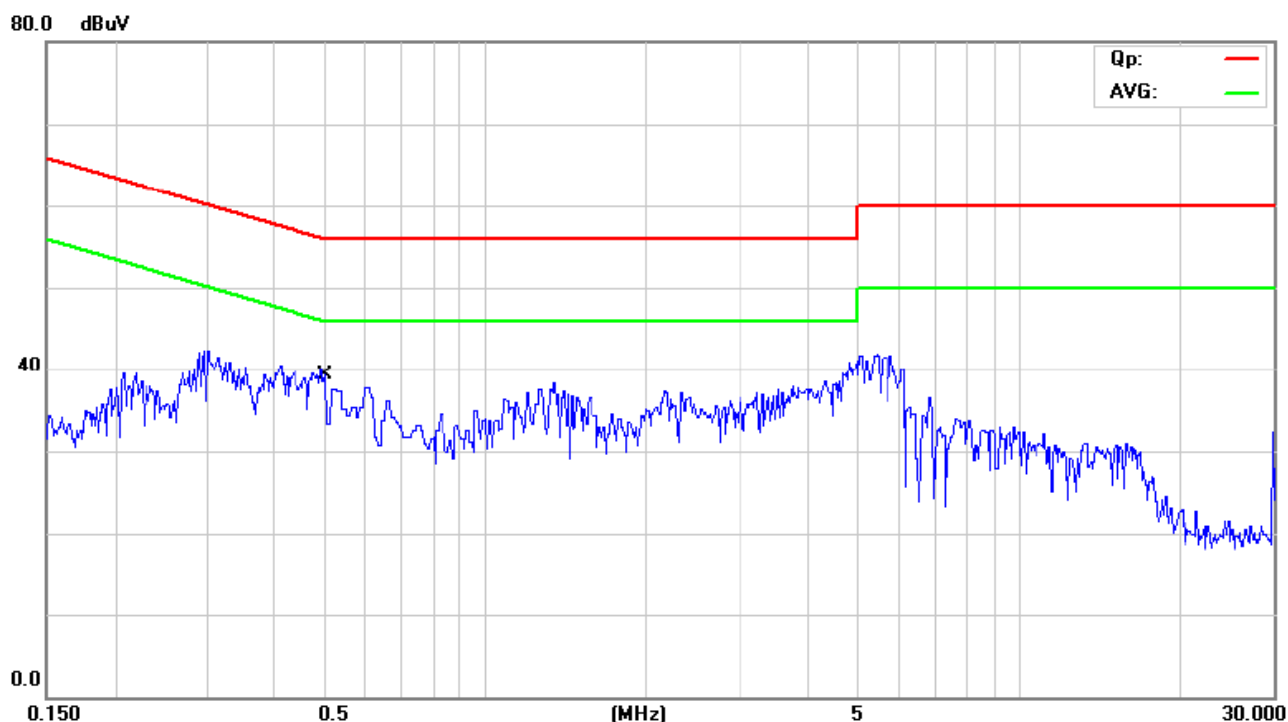

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.4987	18.40	10.27	28.67	56.02	-27.35	QP	
2		0.4987	-9.00	10.27	1.27	46.02	-44.75	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.5 Harmonic Current Emissions

This test was performed as per EMC Basic Standard EN61000-3-2 :2014

Environmental conditions: Temperature: 22°C; Humidity: 52%RH

EUT Operating Mode

Communication by Bluetooth

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Communication by Bluetooth	N/A

Table 1 - Limit of Harmonics Current Measurement

Limits for Class A equipment	
Harmonics order (n)	Max. permissible harmonics current (A)
Odd harmonics	
3	2.3
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15≤n≤39	0.15 x 15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8≤n≤40	0.23 x 8/n

Note:

- For Class A equipment, the harmonics of the input current shall not exceed the absolute values given in table 1.
- For Class B equipment, the harmonics of the input current shall not exceed the values given in table 1 multiplied by factor of 1, 5.

Table 2 - Limit of Harmonics Current Measurement

Limits for Class C equipment	
Harmonics order (n)	Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency (A)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Odd harmonics only	
2	2
3	$30 \times \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$	3

Note: The harmonic current limits of lighting equipment shall not exceed the relative limits given in table 2.

Table 3 - Limit of Harmonics Current Measurement		
Limits for Class D equipment		
Harmonics order (n)	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
Odd harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13<=n<=39	3.85/n	See table 1
11<= n<=39	3	

Note: The harmonic of the input current shall not exceed the values that can be derived form table 3.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The EUT is classified as follows:
 - Class A Balanced three-phase equipment and all other equipment, except that stated in one of the following classes.
 - Class B Portable tools.
 - Class C Lighting equipment, including dimming devices.
 - Class D Equipment having an input current with “special wave shape” and an active input power, $P \leq 600W$

Note: Due to the input less than 75W. This test item is not applicable.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer, Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.6 Flicker and Voltage Fluctuation

This test was performed as per EMC Basic Standard EN 61000-3-3: 2013

Environmental conditions: Temperature: 25°C; Humidity: 52%RH

EUT Operating Mode

Communication by Bluetooth

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Communication by Bluetooth	Pass

Limits of Voltage Fluctuation and Flicks Measurement

Test Item	Limit	Note
P_{st}	1.0	Pst means short-term flicker indicator
P_{lt}	0.65	Plt means long-term flicker indicator
T_{dt} (ms)	500	Tdt means maximum time that dt exceeds 3%.
d_{max} (%)	4	Dmax means maximum relative voltage change.
dc (%)	3.3	Dc means relative steady-state voltage change.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT 10 minutes and the observation period for long-term flicker indicator is 2 hours.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

EUT: BTH-30	Tested by: CHARLES	
Test category: All parameters (European limits)	Test Margin: 100	
Test date: 2017-12-27	Start time: 17:37:14	End time: 17:47:33
Test duration (min): 10	Data file name: F-000193.cts_data	
Comment: Comment		
Customer: Customer information		

Test Result: Pass **Status:** Test Completed


Pst_i and limit line **European Limits**

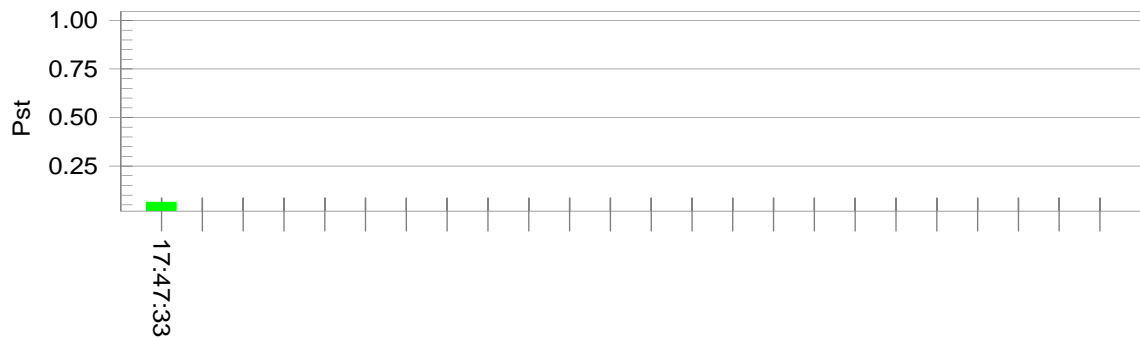

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Plt and limit line

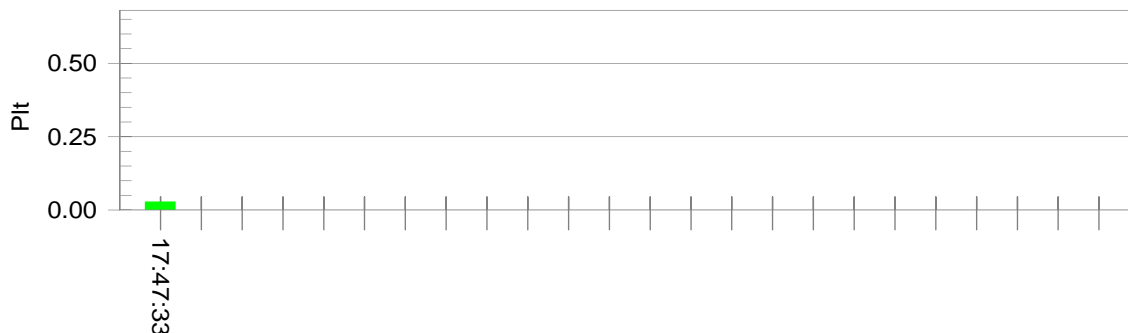

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.88		
Highest dt (%):	-0.82	Test limit (%):	N/A N/A
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	-0.77	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650 Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.2 Immunity Test – Radiated, RF Electromagnetic Field

According to EMC Basic Standard (EN 61000-4-3[9])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 24°C; Humidity: 50%RH

Type of Port: Enclosure

Performance Criterion: CT/CR

The distance between the turn-table axis and Tx&Rx-antenna is 3m.

Field strength = 3V/m

Start Frequency = 80MHz Stop Frequency = 6000MHz

Frequency Step = lin 1MHz

The test signal is amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1000 Hz

Results

Frequency (MHz)	Antenna Polarity	Radiation to	Reaction of the EUT During and after test	Result
80-6000	Horizontal	Front	No reactions recognized	Pass
80-6000	Vertical	Front	No reactions recognized	Pass
80-6000	Horizontal	Rear	No reactions recognized	Pass
80-6000	Vertical	Rear	No reactions recognized	Pass
80-6000	Horizontal	Left	No reactions recognized	Pass
80-6000	Vertical	Left	No reactions recognized	Pass
80-6000	Horizontal	Right	No reactions recognized	Pass
80-6000	Vertical	Right	No reactions recognized	Pass

Note: Performance criteria A observed.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with

The calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

Audio output was monitored to judge the EUT performance criteria.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.3 Electrostatic Discharge

According to EMC basic standard (EN61000-4-2[10])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 25°C; Humidity: 55%RH

Type of Port: Enclosure, , USB Port, Key Button, Gaps

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

Direct contact discharge on conducting surfaces of EUT

Indirect air discharge on insulating surfaces of EUT

$\pm 2\text{kV}$, $\pm 4\text{kV}$ direct discharge & $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ air discharge

Test Results

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
-2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
+4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
-4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
+8kV	-	-	n.r.r Passed
-8kV	-	-	n.r.r Passed

Remarks: n.r.r. = no reaction recognized

Performance Criteria A observed and No any function degraded during the tests.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.4 Fast Transients Common Mode

According to EMC basic standard (EN61000-4-4 [11])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 24°C; Humidity: 51%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 10 cm.

The test level for ac mains power input ports shall be 1kV open circuit.

Test Setup

Burst on Power Line (direct injection)

Test Results

Adjustment on UCS 500 M4: Trigger “AUTO”, Burst length: 15ms					Test Time:	60s for every voltage and polarity		
						120s for every voltage and polarity		
Testing on power Line (direct injection)		Reaction of The Test Object During and after Test						Result
Test Voltage	Repetition Frequency	L1 =>GND (+=>GND)	L2=> GND	L3=> GND	N=> GND	PE=> GND	L1, N, => GND	
-0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
-1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass

Remarks: n.r.r. = no reaction recognized, N/A = not applicable.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.5 RF Common Mode

According to EMC basic standard (EN61000-4-6 [10])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 26°C; Humidity: 53%RH

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

Start Frequency = 150KHz Stop Frequency = 80MHz

Frequency Step = 50kHz in the range of 150kHz-5MHz

1% increment in the range of 5MHz-80MHz

The test signal is amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1000 Hz

Test Setup

Injection via CDN or BIC clamp

Test Results

Injection On	Injection Via	Reaction of the EUT During and after test	Result
AC input power line	CDN	No reactions recognized	Pass

Performance criteria A observed

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.7 Voltage Dips and Interruption

According to EMC basic standard (EN61000-4-11 [13])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 23°C; Humidity: 50%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

The test of voltage dip level shall be- a vol. Reduction of the supply vol. 0% for 10ms and 20ms and 30% for 500ms

The test of voltage interruption level shall be- a vol. Reduction of the supply vol. 0% for 5000ms

Test Results

For each test 3 repetitions in an interval of 10s time for decrease or increase of supply voltage: T down/up
< 5μs(due to switching)

Voltage Dips

Terminal Supply Voltage	Start by Trigger Angle (AC)	Duration of Test Voltage	Test Voltage	Reaction of EUT during and after Test	Result
U_1		T_{U2}	U_2		
100% U_N : 230V	0°	10ms	0% U_N : 0V	n.r.r- performance criteria A observed	Pass
100% U_N : 230V	0°	20ms	0% U_N : 0V	n.r.r- performance criteria A observed	Pass
100% U_N : 230V	0°	500ms	70% U_N : 161V	n.r.r- performance criteria A observed	Pass
Voltage Interruption					
100% U_N : 230V	0°	5000ms	0% U_N : 0V	n.r.r- performance criteria B observed	Pass

n.r.r- no reaction recongnized

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.8 Surges Common & Differential Mode (1-phase)

According to EMC basic standard (EN61000-4-5 [14])

Operating Mode: Communication by Bluetooth

Environmental conditions: Temperature: 23°C; Humidity: 50%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

1KV open circuit for common mode & 0.5KV open circuit for differential mode.

Test Results

5 pulses for each polarity and test voltage, alternating and negative/positive, triggered in case of AC- powerline:

0°, 45°, 90° 180°, 270°, referred to the line frequency. (L1)

Repetition rate is 1 per min.

Test Voltage	Reaction of the test object during and after test by trigger angle/pulse no.(coupling on DC-lines =>trigger angle not relevant).					Result
	0°/pulse no1, 2	45 ⁰ /pulse, no.3, 4	90°/pulse, no. 5, 6	180°/pulse, no. 7, 8	270°/pulse, no. 9, 10	
Capacitive coupling on AC line: L1=>N or DC lines lines +=>- (Ri=2 Ω /C =18uF)						
-0.5kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass
+0.5kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-1.0kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass
+1.0kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-2.0Kv	N/A	N/A	N/A	N/A	N/A	N/A
+2.0kV						
- kV	N/A	N/A	N/A	N/A	N/A	N/A
+kV						

Performance Criteria A Observed.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



3.0 CE Mark label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.



Mark Location: Rear enclosure

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4. Photographs – Test Setup

4.1 Photograph – Conducted Test Setup

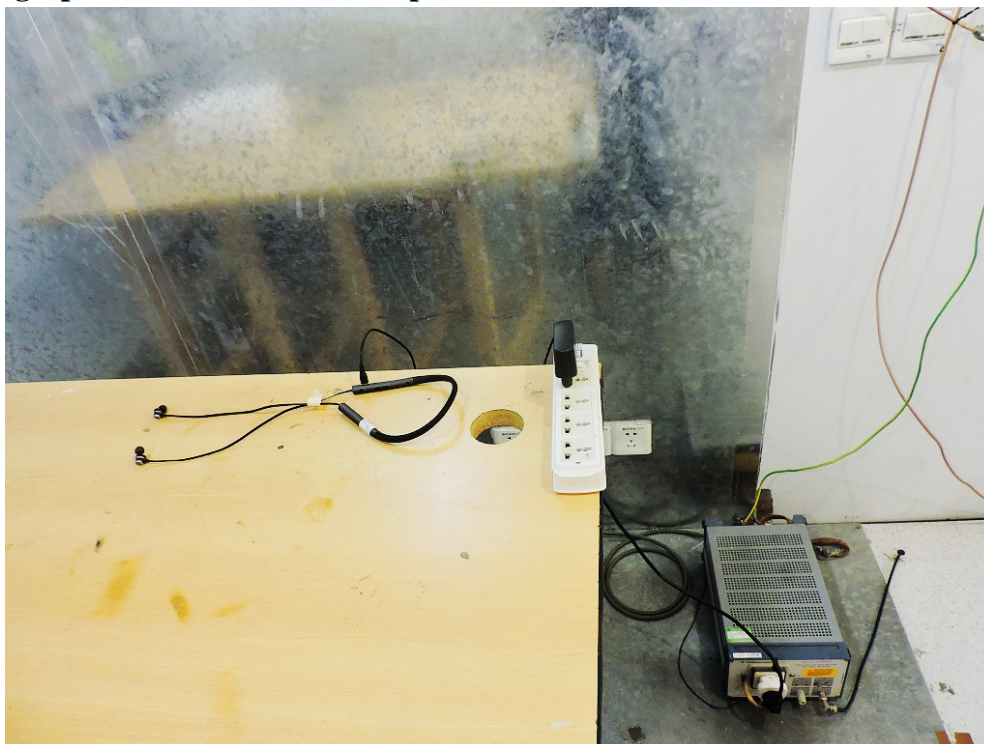

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.2 Radiated Emission Test Setup

Photograph –Radiated Emission Test Setup

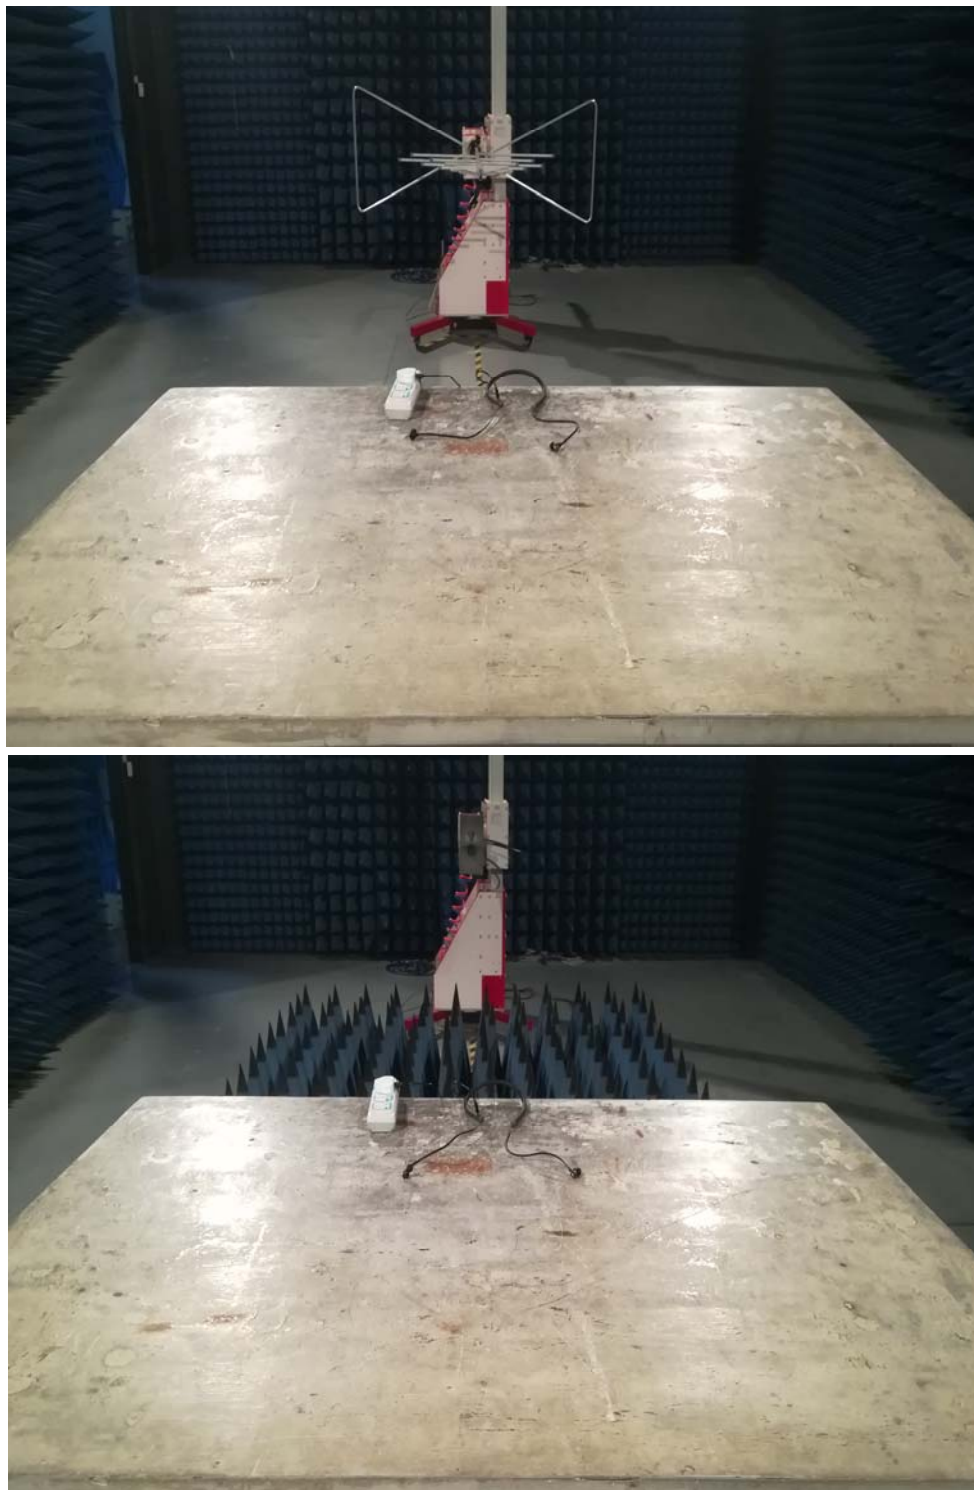

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.3 Photograph –EFT/B, Surge, Voltage Dips Test Setup



4.4 Photograph –Flicker Test Setup



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.5 Photograph –RS Test Setup



4.6 Photograph –ESD Test Setup




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.7 Photograph –CS Test Setup

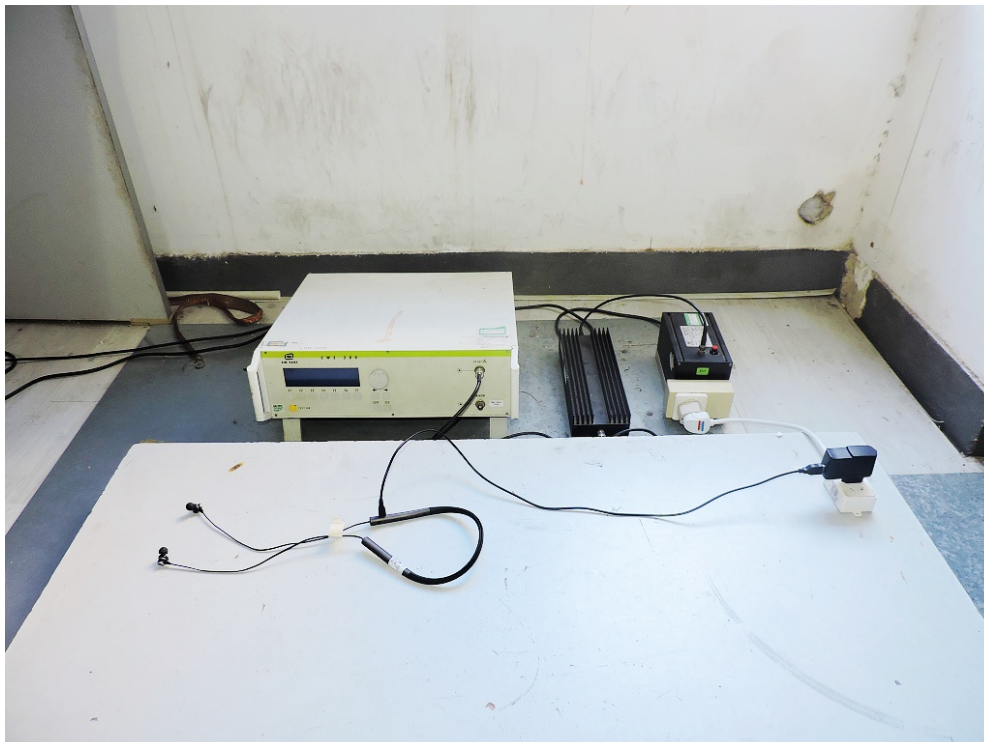

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



5.0 Photographs – EUT




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Photos of EUT

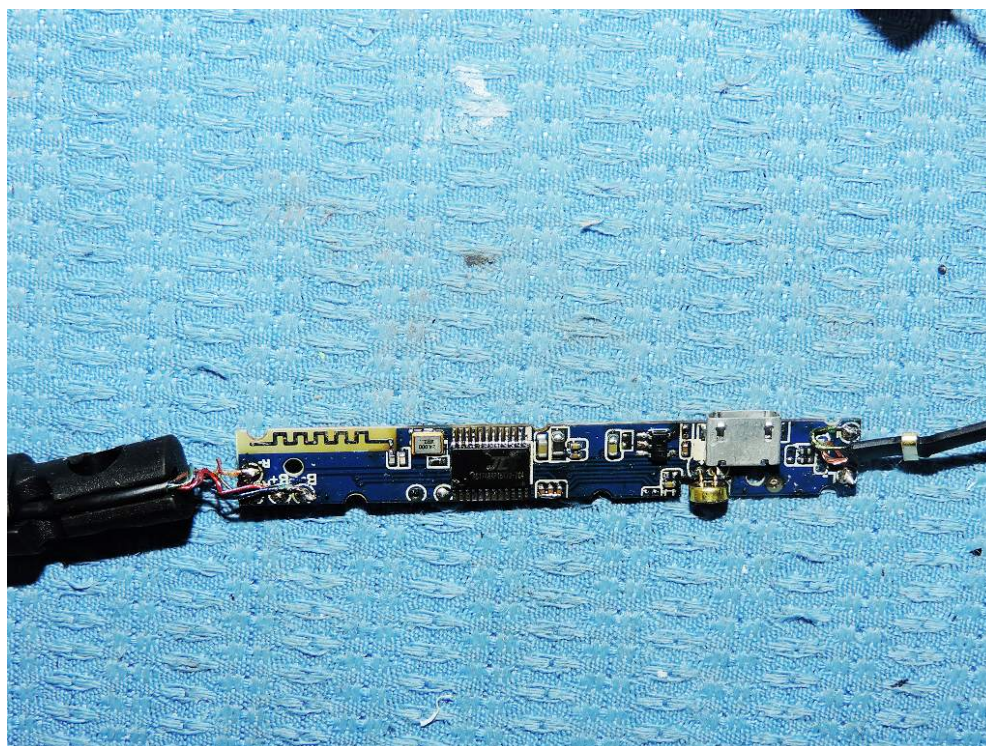


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Photos of EUT

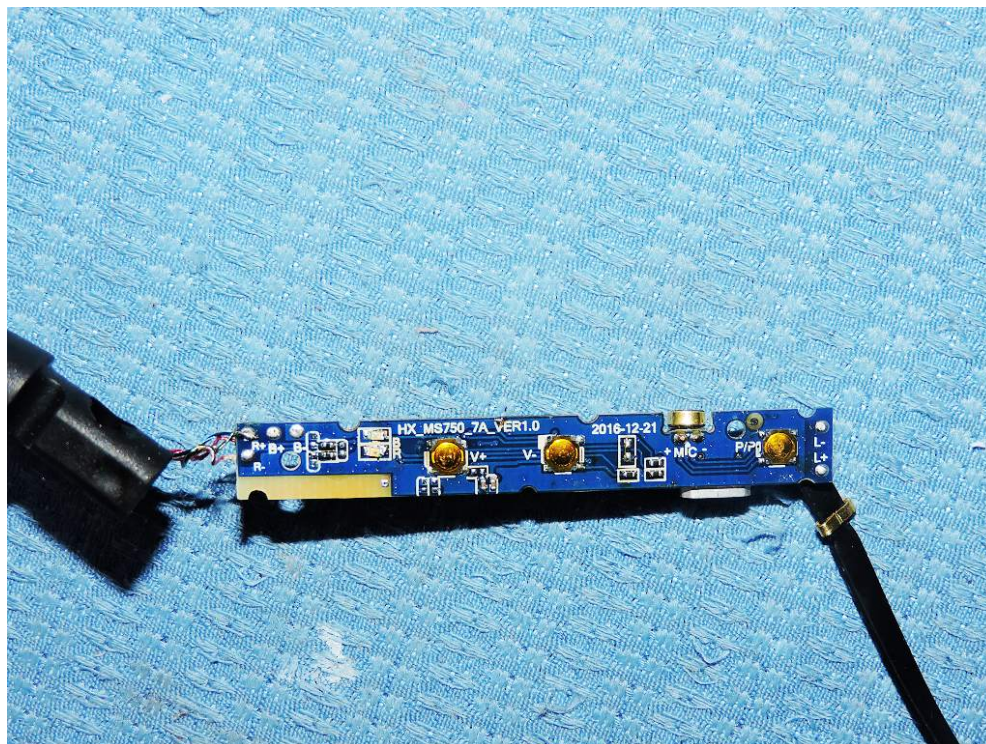

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



6.0 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2017-06-02	2018-06-01
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2017-06-02	2018-06-01
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2017-06-02	2018-06-01
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2017-06-02	2018-06-01
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2017-06-02	2018-06-01
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2017-06-02	2018-06-01
System Controller	CT	SC100	-	2017-08-22	2018-08-21
Oscillator	KENWOOD	AG-203D	3070002	2017-08-22	2018-08-21
Spectrum Analyzer	HAMEG	HM5012	-	2017-08-22	2018-08-21
Power Supply	LW	APS1502	-	2017-08-22	2018-08-21
5K VA AC Power Source	California Instruments	5001iX	56060	2017-06-02	2018-06-01
CDN	EM TEST	CDN M2/M3	-	2017-06-02	2018-06-01
Attenuation	EM TEST	ATT6/75	-	2017-06-02	2018-06-01
Resistance	EM TEST	R100	-	2017-06-02	2018-06-01
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2017-06-02	2018-06-01
Inductive Components	EM TEST	MC2630	-	2017-06-02	2018-06-01
Antenna	EM TEST	MS100	-	2017-06-02	2018-06-01
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2017-08-23	2018-08-22
Power Amplifier	AR	150W1000	300999	2017-08-23	2018-08-22
Field probe	Holaday	HI-6005	105152	2017-08-23	2018-08-22
Bilog Antenna	Chase	CBL6111C	2576	2017-08-23	2018-08-22
Loop Antenna	EMCO	6502	00042960	2017-08-23	2018-08-22
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2017-08-22	2018-08-21
3m OATS	--	--	N/A	2017-08-24	2018-08-23

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Vector Signal Generator	AGILENT	E4438C	MY49070163	2017.01.20	2018.01.19
Splitter	Mini-Circuits	ZAP-50W	NN256400424	2017.01.20	2018.01.19
Directional Coupler	AGILENT	87300C	MY44300299	2017.01.20	2018.01.19
vector Signal Generator	AGILENT	E4438C	US44271917	2017.01.20	2018.01.19
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	AGILENT	U2531A	TW54063507	2017.01.20	2018.01.19
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	AGILENT	U2531A	TW54063513	2017.01.20	2018.01.19
Splitter	Mini	PS3-7	4463	2017.01.20	2018.01.19
Spectrum Analyzer	AGILENT	E7405A	US44210471	2017.01.20	2018.01.19
Attenuator	Resnet	20dB	(n.a)	2017.01.20	2018.01.19
Signal Analyzer	AGILENT	N9010A	MY48030494	2017.01.20	2018.01.19
ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2017-06-02	2018-06-01
High voltage probe	SCHWARZBECK	TK9420	--	2017-06-02	2018-06-01

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.