



**BUREAU
VERITAS**

Test Report No.: LD200113N010



Certificate # 2951.01

Test Report No.: LD200113N010

Applicant's name :

Address :

Test Item description: Power Bank

Model/Type reference :

Testing laboratory

Name : Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Address : No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province, 523942, People's Republic of China

Test specification

Standard : ☐ IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
☒ EN 60950-1:2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013

Test Result : The sample satisfies to the clauses examined.

Prepared By :

Sean Tu

2020-04-20

Date

Sean Tu
Engineer / Safety Department

Approved By:

Z - 1

2020-04-20

Date

Daniel Yu
Manager / Safety Department

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



Test Report No.: LD200113N010



TEST REPORT

Report Number..... : LD200113N010

Date of issue..... : 2020-04-20

Total number of pages..... : 77

Testing laboratory..... : Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Test location/Address..... : No. 96, Guantai Road (Houjie Section), Houjie Town,
Dongguan City, Guangdong Province, 523942, People's
Republic of China

Applicant's name..... :

Address

Test specification:Standard..... : ☐ IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am
2:2013
☒ EN 60950-1:2006 + A11: 2009 + A1: 2010 + A12: 2011
+ A2: 2013

Non-standard test method : N/A

Test Report Form No. : IEC/EN 60950-1_VER.4

Test Report Form(s) Originator : BV_DG

Master TRF..... : Dated 2017-01

Manufacturer

Address

Factory

Address

Test item description : Power Bank

Trade Mark : /

Model/Type reference

Ratings : Input: 5V \pm 1.0A
Output: Lightning or Type-C 5V \pm 1.0A,
Total Output: 5V \pm 1.0ABureau Veritas Shenzhen Co., Ltd.
Dongguan BranchNo. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, ChinaTel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: LD200113N010



BUREAU
VERITAS

Copy of marking plate (representative)

Input: 5V=1.0A
Output: Lightning or Type-C 5V=1.0A
Total Output: 5V=1.0A

Capacity: 1200mAh / 4.44Wh
Manufacturer: JMTek Industries (Shenzhen)
co., Ltd





Test Report No.: LD200113N010



Test item particulars	
Equipment mobility	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input checked="" type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
Connection to the mains	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> type A <input type="checkbox"/> type B <input type="checkbox"/> permanent connection <input type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input checked="" type="checkbox"/> not directly connected to the mains
Operating condition	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
Access location	<input checked="" type="checkbox"/> operator accessible <input type="checkbox"/> restricted access location
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: Supplied by external DC source or internal battery.
Mains supply tolerance (%) or absolute mains supply values	N/A
Tested for IT power systems	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/> Not classified
Considered current rating (A)	N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
IP protection class	IPX0
Altitude during operation (m)	Below 2000 m
Altitude of test laboratory (m)	Below 2000 m
Mass of equipment (kg)	Approx: 0.048
Possible test case verdicts:	
- test case does not apply to the test object	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
Testing	
Date of receipt of test item	Jan. 13, 2020
Date(s) of performance of tests	Jan. 13, 2020 – Apr. 03, 2020



Test Report No.: LD200113N010

**General remarks:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

General product information:

1. The equipment under test (EUT) is a Power Bank used for information technology equipment, which contained single certified cell (1S1P).
2. The maximum charge and discharge ambient (Tma) of +45°C for Power Bank declared by manufacturer.
3. The equipment is supplied by external DC source. For acceptance of the external DC source with output rating (5Vdc, 1A min.) when supplied via micro USB port. And minimum temperature 45°C. These power supplies have to be evaluated according to EN 60950-1:2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013.
4. Dimension of the EUT(approximately): 67.0mm (L) x 44.0mm (W) x 20.0mm (T).
5. The equipment is consisting two type ports and wireless charge function:

Ports' type	Function	Rating
One Micro USB port	Input (Charge) only	5V \pm 1A
Lightning or Type-C port	Output (Discharge) only	5V \pm 1.0A for each; Total 1.0A Max.

- a) The EUT can't be charged and discharged simultaneously.
 - b) When the Lightning or Type-C port were supply (discharge) at the same time, the output maximum total output is 5Vdc, 1.0A.
6. The equipment's top enclosure is secured to bottom enclosure by clamp and hook construction.



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
1	GENERAL		P
1.5	Components		P
1.5.1	General	Components, which were found to affect safety aspects, are conformed to the relevant IEC component standards and/or comply with the requirements of this standard.	P
	Comply with IEC 60950-1 or relevant component standard	(See appended table 1.5.1)	P
1.5.2	Evaluation and testing of components	Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions presented in the equipment.	P
1.5.3	Thermal controls	No thermal controls used.	N/A
1.5.4	Transformers	No such component.	N/A
1.5.5	Interconnecting cables	Interconnecting cable for Interconnection is carrying only SELV voltages with power consumption below 240 VA.	P
1.5.6	Capacitors bridging insulation	No such component.	N/A
1.5.7	Resistors bridging insulation	No such components.	N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation	No such components.	N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits	No such components.	N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable	No such components.	N/A
1.5.8	Components in equipment for IT power systems	The equipment do not intend to use for IT power systems.	N/A
1.5.9	Surge suppressors	No such components.	N/A
1.5.9.1	General	No such components.	N/A
1.5.9.2	Protection of VDRs	No such components.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
1.5.9.3	Bridging of functional insulation by a VDR	No such construction.	N/A
1.5.9.4	Bridging of basic insulation by a VDR	No such construction.	N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR	No such components.	N/A

1.6	Power interface		P
1.6.1	AC power distribution systems	Not directly connected to the mains.	N/A
1.6.2	Input current	(See appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	Complied.	P
1.6.4	Neutral conductor	Not directly connected to the mains.	N/A

1.7	Marking and instructions		P
1.7.1	Power rating and identification markings	See below	P
1.7.1.1	Power rating marking	See apparatus label.	P
	Multiple mains supply connections.....:	No such equipment.	N/A
	Rated voltage(s) or voltage range(s) (V)	5.0Vdc	P
	Symbol for nature of supply, for d.c. only	DC symbol “  ” used.	P
	Rated frequency or rated frequency range (Hz)	Class III equipment.	N/A
	Rated current (mA or A)	1.0A	P
1.7.1.2	Identification markings	See below.	P
	Manufacturer's name or trade-mark or identification mark	Manufacturer: JMTek Industries (Shenzhen) co., Ltd	P
	Model identification or type reference	PB30	P
	Symbol for Class II equipment only	Class III equipment.	N/A
	Other markings and symbols	Additional symbols or markings do not give risk to misunderstanding.	P
1.7.1.3	Use of graphical symbols	Correct symbol used on the label, and explained in the user manual.	P

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
1.7.2	Safety instructions and marking	Safety related information has been evaluated. Manufacturer commits to provide them in the language of the countries where the product will be distributed.	P
1.7.2.1	General	See below.	N/A
1.7.2.2	Disconnect devices	Not directly connected to the mains.	N/A
1.7.2.3	Overcurrent protective device	No such equipment.	N/A
1.7.2.4	IT power distribution systems	Not directly connected to the mains.	N/A
1.7.2.5	Operator access with a tool	No tool is necessary to operate this product.	N/A
1.7.2.6	Ozone	This EUT is not intended to produce the ozone.	N/A
1.7.3	Short duty cycles	This EUT is continuous operation equipment.	N/A
1.7.4	Supply voltage adjustment	No such device.	N/A
	Methods and means of adjustment; reference to installation instructions	No such device.	N/A
1.7.5	Power outlets on the equipment	No power outlet.	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	No such component.	N/A
1.7.7	Wiring terminals	No such terminals.	N/A
1.7.7.1	Protective earthing and bonding terminals	Class III equipment, no such terminals.	N/A
1.7.7.2	Terminals for a.c. mains supply conductors	The EUT is not directly connected to the a.c. mains.	N/A
1.7.7.3	Terminals for d.c. mains supply conductors	The EUT is not directly connected to the d.c. mains.	N/A
1.7.8	Controls and indicators	No such parts.	N/A
1.7.8.1	Identification, location and marking	No such parts.	N/A
1.7.8.2	Colours	No safety relevant control or indicator.	N/A
1.7.8.3	Symbols according to IEC 60417	No safety relevant control or indicator.	N/A
1.7.8.4	Markings using figures	No such parts.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
1.7.9	Isolation of multiple power sources	Class III equipment.	N/A
1.7.10	Thermostats and other regulating devices	No thermostat or other regulating devices.	N/A
1.7.11	Durability	After this test there was no damage to the label. The marking on the label did not fade. There was no curling or lifting on the label edge.	P
1.7.12	Removable parts	Marking was not show on removable part.	N/A
1.7.13	Replaceable batteries	Irreplaceable batteries.	N/A
	Language(s)	--	—
1.7.14	Equipment for restricted access locations	No for use in the restricted access location.	N/A

2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	See below	P
2.1.1.1	Access to energized parts	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	N/A
	Test by inspection	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	N/A
	Test with test finger (Figure 2A)	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	N/A
	Test with test pin (Figure 2B)	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	N/A
	Test with test probe (Figure 2C)	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.1.1.2	Battery compartments	No TNV circuit inside the EUT.	N/A
2.1.1.3	Access to ELV wiring	No ELV wiring in operator accessible area.	N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage wiring in operator accessible area.	N/A
2.1.1.5	Energy hazards	See appended table 2.1.1.5.	P
2.1.1.6	Manual controls	No such device.	N/A
2.1.1.7	Discharge of capacitors in equipment	No such capacitor.	N/A
	Measured voltage (V); time-constant (s)	--	—
2.1.1.8	Energy hazards – d.c. mains supply	This product is not intended to be connected to d.c. mains supply.	N/A
	a) Capacitor connected to the d.c. mains supply ..	This product is not intended to be connected to d.c. mains supply.	N/A
	b) Internal battery connected to the d.c. mains supply	This product is not intended to be connected to d.c. mains supply.	N/A
2.1.1.9	Audio amplifiers	No audio amplifiers.	N/A
2.1.2	Protection in service access areas		N/A
2.1.3	Protection in restricted access locations	It is not intended to be used in restricted locations.	N/A

2.2	SELV circuits		P
2.2.1	General requirements	See below.	P
2.2.2	Voltages under normal conditions (V)	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	P
2.2.3	Voltages under fault conditions (V)	Class III equipment, supplied by SELV and there is no hazardous voltage generated inside the EUT.	P
2.2.4	Connection of SELV circuits to other circuits	SELV circuit is only connected to SELV circuit	P

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

2.3	TNV circuits		N/A
2.3.1	Limits	No TNV circuit.	N/A
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts	No TNV circuit.	N/A
2.3.2.1	General requirements	No TNV circuit.	N/A
2.3.2.2	Protection by basic insulation	No TNV circuit.	N/A
2.3.2.3	Protection by earthing	No TNV circuit.	N/A
2.3.2.4	Protection by other constructions	No TNV circuit.	N/A
2.3.3	Separation from hazardous voltages	No TNV circuit.	N/A
	Insulation employed		—
2.3.4	Connection of TNV circuits to other circuits	No TNV circuit.	N/A
	Insulation employed		—
2.3.5	Test for operating voltages generated externally	No TNV circuit.	N/A

2.4	Limited current circuits		N/A
2.4.1	General requirements	No limited current circuits.	N/A
2.4.2	Limit values	No limited current circuits.	N/A
	Frequency (Hz).....	--	—
	Measured current (mA)	--	—
	Measured voltage (V)	--	—
	Measured circuit capacitance (nF or μ F)	--	—
2.4.3	Connection of limited current circuits to other circuits	No limited current circuits.	N/A

2.5	Limited power sources		P
	a) Inherently limited output	No such circuit.	N/A
	b) Impedance limited output	No such circuit.	N/A
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition	See appended table 2.5.	P
	Use of integrated circuit (IC) current limiters	No such component.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	d) Overcurrent protective device limited output	--	—
	Max. output voltage (V), max. output current (A), max. apparent power (VA)	--	—
	Current rating of overcurrent protective device (A) ..	--	—

2.6	Provisions for earthing and bonding		N/A
2.6.1	Protective earthing	Class III equipment, no protective earthing.	N/A
2.6.2	Functional earthing		N/A
	Use of symbol for functional earthing		N/A
2.6.3	Protective earthing and protective bonding conductors		N/A
2.6.3.1	General		N/A
2.6.3.2	Size of protective earthing conductors		N/A
	Rated current (A), cross-sectional area (mm ²), AWG		—
2.6.3.3	Size of protective bonding conductors		N/A
	Rated current (A), cross-sectional area (mm ²), AWG		—
	Protective current rating (A), cross-sectional area (mm ²), AWG.....		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min)		N/A
2.6.3.5	Colour of insulation		N/A
2.6.4	Terminals		N/A
2.6.4.1	General		N/A
2.6.4.2	Protective earthing and bonding terminals		N/A
	Rated current (A), type, nominal thread diameter (mm).....		—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N/A
2.6.5	Integrity of protective earthing		N/A
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com

**Test Report No.: LD200113N010**

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
2.6.5.3	Disconnection of protective earth		N/A
2.6.5.4	Parts that can be removed by an operator		N/A
2.6.5.5	Parts removed during servicing		N/A
2.6.5.6	Corrosion resistance		N/A
2.6.5.7	Screws for protective bonding		N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

2.7	Overcurrent and earth fault protection in primary circuits		N/A
2.7.1	Basic requirements	Class III equipment	N/A
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7		N/A
2.7.3	Short-circuit backup protection		N/A
2.7.4	Number and location of protective devices		N/A
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel		N/A

2.8	Safety interlocks		N/A
2.8.1	General principles	No such safety interlocks in the equipment	N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm)		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test	(see appended table 5.2)	N/A
2.8.8	Mechanical actuators		N/A

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	Class III equipment, no critical insulation in the EUT.	N/A
2.9.2	Humidity conditioning	Class III equipment, no critical insulation in the EUT.	N/A
	Relative humidity (%), temperature (°C)		—
2.9.3	Grade of insulation	Only the functional insulation inside the EUT.	P
2.9.4	Separation from hazardous voltages	Class III equipment, no critical insulation in the EUT.	N/A
	Method(s) used		—

2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General	See below.	P
2.10.1.1	Frequency	Class III equipment.	N/A
2.10.1.2	Pollution degrees	This report considered the pollution degree II.	P
2.10.1.3	Reduced values for functional insulation	The functional insulation comply with 5.3.4 c)	P
2.10.1.4	Intervening unconnected conductive parts	Class III equipment, supplied by SELV and no critical insulation inside the EUT.	N/A
2.10.1.5	Insulation with varying dimensions	Class III equipment, supplied by SELV and no critical insulation inside the EUT.	N/A
2.10.1.6	Special separation requirements	Class III equipment, supplied by SELV and no critical insulation inside the EUT.	N/A
2.10.1.7	Insulation in circuits generating starting pulses	No such circuit in the equipment.	N/A
2.10.2	Determination of working voltage	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.10.2.1	General	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.2.2	RMS working voltage	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.2.3	Peak working voltage	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.3	Clearances	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.3.1	General	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.3.2	Mains transient voltages	Class III equipment. Not connected to a.c. mains directly.	N/A
	a) AC mains supply	Class III equipment. Not connected to a.c. mains directly.	N/A
	b) Earthed d.c. mains supplies	The equipment is not intended to be supplied by d.c. mains.	N/A
	c) Unearthed d.c. mains supplies	The equipment is not intended to be supplied by d.c. mains.	N/A
	d) Battery operation	The equipment is not intended to be supplied by such battery	N/A
2.10.3.3	Clearances in primary circuits	Class III equipment, supplied by SELV and no critical insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.10.3.4	Clearances in secondary circuits	Class III equipment, supplied by SELV and no critical insulation inside the EUT.	N/A
2.10.3.5	Clearances in circuits having starting pulses	No such circuit	N/A
2.10.3.6	Transients from a.c. mains supply	Class III equipment. Not connected to a.c. mains directly.	N/A
2.10.3.7	Transients from d.c. mains supply	The EUT is not intended to be connected to the d.c. mains.	N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems	Not connected to the telecommunication network and cable distribution systems.	N/A
2.10.3.9	Measurement of transient voltage levels	See below.	N/A
	a) Transients from a mains supply	Class III equipment. Not connected to mains directly.	N/A
	For an a.c. mains supply	Class III equipment. Not connected to a.c. mains directly.	N/A
	For a d.c. mains supply	The EUT is not intended to be connected to the d.c. mains.	N/A
	b) Transients from a telecommunication network :	Not connected to telecommunication network.	N/A
2.10.4	Creepage distances	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.4.1	General	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.4.2	Material group and comparative tracking index	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	CTI tests.....	--	—

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.10.4.3	Minimum creepage distances	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5	Solid insulation	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.1	General	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.2	Distances through insulation	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.3	Insulating compound as solid insulation	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.4	Semiconductor devices	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.5.	Cemented joints	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.6	Thin sheet material – General	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.10.5.7	Separable thin sheet material	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Number of layers (pcs)..... :	--	—
2.10.5.8	Non-separable thin sheet material	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.9	Thin sheet material – standard test procedure	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Electric strength test	--	—
2.10.5.10	Thin sheet material – alternative test procedure	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Electric strength test	--	—
2.10.5.11	Insulation in wound components	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.12	Wire in wound components	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Working voltage :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	a) Basic insulation not under stress :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	b) Basic, supplementary, reinforced insulation :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	c) Compliance with Annex U :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Two wires in contact inside wound component; angle between 45° and 90° :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.13	Wire with solvent-based enamel in wound components	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Electric strength test	--	—
	Routine test	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.5.14	Additional insulation in wound components	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Working voltage :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	- Basic insulation not under stress :	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	- Supplementary, reinforced insulation	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.6	Construction of printed boards	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.6.1	Uncoated printed boards	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.6.2	Coated printed boards	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.6.4	Insulation between conductors on different layers of a printed board	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Distance through insulation	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
	Number of insulation layers (pcs).....	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
2.10.7	Component external terminations	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
2.10.8	Tests on coated printed boards and coated components	No such construction.	N/A
2.10.8.1	Sample preparation and preliminary inspection	No such construction.	N/A
2.10.8.2	Thermal conditioning	No such construction.	N/A
2.10.8.3	Electric strength test	No such construction.	N/A
2.10.8.4	Abrasion resistance test	No such construction.	N/A
2.10.9	Thermal cycling	No such construction.	N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound	No such component.	N/A
2.10.11	Tests for semiconductor devices and cemented joints	No such construction.	N/A
2.10.12	Enclosed and sealed parts	No hermetically sealed component.	N/A

3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P
3.1.1	Current rating and overcurrent protection	Internal wire has adequated cross-sectional area for the carrying current.	P
3.1.2	Protection against mechanical damage	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
3.1.3	Securing of internal wiring	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
3.1.4	Insulation of conductors	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
3.1.5	Beads and ceramic insulators	Not used.	N/A
3.1.6	Screws for electrical contact pressure	No such screws used.	N/A
3.1.7	Insulating materials in electrical connections	No non-metallic materials in electrical connections.	N/A
3.1.8	Self-tapping and spaced thread screws	No self-tapping screws used in electrical connections.	N/A
3.1.9	Termination of conductors	No such terminal.	N/A
	10 N pull test	Class III equipment, supplied by SELV and no critical insulation inside the EUT. Only the functional insulation inside the EUT.	N/A
3.1.10	Sleeving on wiring	No such part.	N/A
3.2	Connection to a mains supply		N/A
3.2.1	Means of connection	See below.	N/A
3.2.1.1	Connection to an a.c. mains supply	No connection to a.c. mains supply.	N/A
3.2.1.2	Connection to a d.c. mains supply	Class III equipment. Not connected to a.c. mains directly.	N/A
3.2.2	Multiple supply connections	Class III equipment.	N/A
3.2.3	Permanently connected equipment	No permanently connected equipment.	N/A
	Number of conductors, diameter of cable and conduits (mm)	--	—
3.2.4	Appliance inlets	No such parts	N/A
3.2.5	Power supply cords	See below.	N/A
3.2.5.1	AC power supply cords	Class III equipment. Not connected to the mains directly.	N/A
	Type	--	—
	Rated current (A), cross-sectional area (mm ²), AWG	--	—
3.2.5.2	DC power supply cords	The equipment is not for connection to d.c. mains supply.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
3.2.6	Cord anchorages and strain relief	No such device.	N/A
	Mass of equipment (kg), pull (N)	--	—
	Longitudinal displacement (mm)	--	—
3.2.7	Protection against mechanical damage	No such device.	N/A
3.2.8	Cord guards	No such device.	N/A
	Diameter or minor dimension D (mm); test mass (g)	--	—
	Radius of curvature of cord (mm)	--	—
3.2.9	Supply wiring space	No such AC power cords used.	N/A

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals	No wiring terminals.	N/A
3.3.2	Connection of non-detachable power supply cords	No wiring terminals.	N/A
3.3.3	Screw terminals	No such terminals.	N/A
3.3.4	Conductor sizes to be connected	No such terminals.	N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		—
3.3.5	Wiring terminal sizes	No such terminals.	N/A
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design	No such terminals.	N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire	Not stranded wire used.	N/A

3.4	Disconnection from the mains supply		N/A
3.4.1	General requirement	Class III equipment. Not connected to the mains directly.	N/A
3.4.2	Disconnect devices	Class III equipment. Not connected to the mains directly.	N/A
3.4.3	Permanently connected equipment	The EUT is not permanently connected equipment.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com

**Test Report No.: LD200113N010****IEC/EN 60950-1**

Clause	Requirement – Test	Result - Remark	Verdict
3.4.4	Parts which remain energized	Class III equipment. Not connected to the mains directly.	N/A
3.4.5	Switches in flexible cords	No such flexible cords provided.	N/A
3.4.6	Number of poles - single-phase and d.c. equipment	Class III equipment. Not connected to the mains directly.	N/A
3.4.7	Number of poles - three-phase equipment	Class III equipment. Not connected to the mains directly.	N/A
3.4.8	Switches as disconnect devices	No such switch used	N/A
3.4.9	Plugs as disconnect devices	Class III equipment. Not connected to the mains directly.	N/A
3.4.10	Interconnected equipment	Interconnection to other devices by secondary SELV output only.	N/A
3.4.11	Multiple power sources	Only one supply connection provided	N/A

3.5	Interconnection of equipment		P
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits	SELV circuit only connected to SELV circuit.	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnection circuits.	N/A
3.5.4	Data ports for additional equipment	No such ports.	N/A

4	PHYSICAL REQUIREMENTS		P
4.1	Stability		N/A
	Angle of 10°	For the equipment, the mass is less than 7kg.	N/A
	Test force (N)	Not floor-standing equipment.	N/A

4.2	Mechanical strength		P
4.2.1	General	See below.	P

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	Rack-mounted equipment.	Not rack-mounted equipment.	N/A
4.2.2	Steady force test, 10 N	Class III equipment, supplied by SELV and there is no hazardous voltage or other safety relevant hazardous generated inside the EUT.	N/A
4.2.3	Steady force test, 30 N	No door or cover in an operator access area.	N/A
4.2.4	Steady force test, 250 N	250N applied to the enclosure near internal battery. No safety relevant damages after test.	P
4.2.5	Impact test	See clause 4.2.6.	N/A
	Fall test	See clause 4.2.6.	N/A
	Swing test	See clause 4.2.6.	N/A
4.2.6	Drop test; height (mm)	After dropped from the height of 1m, no safety relevant damages.	P
4.2.7	Stress relief test	After 70.0°C for 7h, no safety relevant damages.	P
4.2.8	Cathode ray tubes	No CRT inside the EUT.	N/A
	Picture tube separately certified	No CRT inside the EUT.	N/A
4.2.9	High pressure lamps	No high pressure lamps.	N/A
4.2.10	Wall or ceiling mounted equipment; force (N)	No such mounting means.	N/A

4.3	Design and construction		P
4.3.1	Edges and corners	Edges and corners of the enclosure are rounded.	P
4.3.2	Handles and manual controls; force (N)	No such device.	N/A
4.3.3	Adjustable controls	No such device.	N/A
4.3.4	Securing of parts	No such part.	N/A
4.3.5	Connection by plugs and sockets	No mismatch of connectors, plugs or sockets possible.	P
4.3.6	Direct plug-in equipment	No such equipment.	N/A
	Torque	--	—
	Compliance with the relevant mains plug standard	No such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
4.3.7	Heating elements in earthed equipment	No heating element.	N/A
4.3.8	Batteries	See below.	P
	- Overcharging of a rechargeable battery	See table 4.3.8.	P
	- Unintentional charging of a non-rechargeable battery	Rechargeable battery.	N/A
	- Reverse charging of a rechargeable battery	No such possibility.	N/A
	- Excessive discharging rate for any battery	See table 4.3.8.	P
4.3.9	Oil and grease	No oil and grease inside the equipment.	N/A
4.3.10	Dust, powders, liquids and gases	The equipment is not intended to be exposed to dust, powers, liquids and gases.	N/A
4.3.11	Containers for liquids or gases	No container for liquids or gases provided.	N/A
4.3.12	Flammable liquids	No flammable liquids in the equipment.	N/A
	Quantity of liquid (l)	No flammable liquids in the equipment.	N/A
	Flash point (°C)	No flammable liquids in the equipment.	N/A
4.3.13	Radiation	See below.	P
4.3.13.1	General	See below.	P
4.3.13.2	Ionizing radiation	No ionizing radiation.	N/A
	Measured radiation (pA/kg)	--	—
	Measured high-voltage (kV)	--	—
	Measured focus voltage (kV)	--	—
	CRT markings	--	—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials	No UV radiation.	N/A
	Part, property, retention after test, flammability classification	No UV radiation.	N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation	No UV radiation.	N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	See below.	P
4.3.13.5.1	Lasers (including laser diodes)	No such devices.	N/A
	Laser class	--	—

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com

**Test Report No.: LD200113N010**

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
4.3.13.5.2	Light emitting diodes (LEDs)	The LEDs used for indicating, which are considered as low power application, need not comply with IEC 62471	P
4.3.13.6	Other types	No other type of source inside the EUT.	N/A

4.4	Protection against hazardous moving parts		N/A
4.4.1	General	No moving parts	N/A
4.4.2	Protection in operator access areas		N/A
	Household and home/office document/media shredders	(see Annex EE)	N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A
4.4.5	Protection against moving fan blades	No moving fan blades	N/A
4.4.5.1	General		N/A
	Not considered to cause pain or injury. a).....:		N/A
	Is considered to cause pain, not injury. b)		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A

4.5	Thermal requirements		P
4.5.1	General	See below.	P
4.5.2	Temperature tests	(see appended table 4.5)	P
	Normal load condition per Annex L	Max. normal loading.	—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat	No such part.	N/A

4.6	Openings in enclosures		P
4.6.1	Top and side openings	No openings	P

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	Dimensions (mm)	--	—
4.6.2	Bottoms of fire enclosures	No openings	P
	Construction of the bottom, dimensions (mm) ..	--	—
4.6.3	Doors or covers in fire enclosures	No such construction.	N/A
4.6.4	Openings in transportable equipment	See below.	P
4.6.4.1	Constructional design measures	No openings.	P
	Dimensions (mm)	--	—
4.6.4.2	Evaluation measures for larger openings	No openings.	N/A
4.6.4.3	Use of metallized parts	No openings.	N/A
4.6.5	Adhesives for constructional purposes	No adhesives for construction purposes.	N/A
	Conditioning temperature (°C), time (weeks).....	--	—

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	See below	P
	Method 1, selection and application of components wiring and materials	Use of materials with the required flammability class, and select the components for simulation of faults with acceptable results.	P
	Method 2, application of all of simulated fault condition tests	Method 1 used.	N/A
4.7.2	Conditions for a fire enclosure	See below.	P
4.7.2.1	Parts requiring a fire enclosure		N/A



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
4.7.2.2	Parts not requiring a fire enclosure	<p>The output of lithium battery cell is less than 15VA (measurement after 3 second) and in compliance with the requirements of sub-clause 2.5 (limited power source). It will be considered as lower power source and no hazards will occur bases on concept of IEC 62368-1. Therefore the fire enclosure is not required for the lithium battery.</p> <p>The EUT is supplied from LPS and the components of EUT are mounted on PCB material with flammability rating V-1 min.</p> <p>The fire enclosure is not necessary</p>	P
4.7.3	Materials		P
4.7.3.1	General	Component and material had adequate flammability classification, see table 1.5.1 for details.	P
4.7.3.2	Materials for fire enclosures	The EUT supplied by LPS, and PWB with min. V-1 used, fire enclosure is not necessary	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures	No such parts	N/A
4.7.3.4	Materials for components and other parts inside fire enclosures	Rated V-1 or better PCB material used.	P
4.7.3.5	Materials for air filter assemblies	No air filter provided.	N/A
4.7.3.6	Materials used in high-voltage components	No high-voltage component inside the equipment.	N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		N/A
5.1.1	General	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
5.1.2	Configuration of equipment under test (EUT)	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.1.2.1	Single connection to an a.c. mains supply		N/A
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.1.4	Application of measuring instrument	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.1.5	Test procedure	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.1.6	Test measurements	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA)...		—
5.1.7	Equipment with touch current exceeding 3,5 mA	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply	No such construction.	N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	Not connected to the telecommunication network and cable distribution systems.	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system	Not connected to the telecommunication network and cable distribution systems.	N/A
	Supply voltage (V)		—

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks	No connected to the telecommunication network.	N/A
	a) EUT with earthed telecommunication ports	Not connected to telecommunication networks.	N/A
	b) EUT whose telecommunication ports have no reference to protective earth	Not connected to telecommunication networks.	N/A

5.2	Electric strength		N/A
5.2.1	General	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A
5.2.2	Test procedure	Class III equipment. Supplied by SELV and not connected to the mains directly.	N/A

5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	see appended table 5.3.	P
5.3.2	Motors	The equipment does not have any motors.	N/A
5.3.3	Transformers	No such device	N/A
5.3.4	Functional insulation.....	Method c) used. Result see appended table 5.3.	P
5.3.5	Electromechanical components	No electromechanical component.	N/A
5.3.6	Audio amplifiers in ITE	There is no audio output connector in this product.	N/A
5.3.7	Simulation of faults	See appended table 5.3	P
5.3.8	Unattended equipment	The equipment was not for unattended use.	N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	See below.	P
5.3.9.1	During the tests	No flame in the equipment. No molten metal was emitted.	P

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
5.3.9.2	After the tests	Class III equipment. Supplied by SELV and there are no hazardous voltage.	N/A
6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements	No TNV circuit.	N/A
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions	No TNV circuit.	N/A
6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements	No TNV circuit.	N/A
6.2.2	Electric strength test procedure	No TNV circuit.	N/A
6.2.2.1	Impulse test	No TNV circuit.	N/A
6.2.2.2	Steady-state test	No TNV circuit.	N/A
6.2.2.3	Compliance criteria	No TNV circuit.	N/A
6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)	--	—
	Current limiting method	--	—
7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	General	No connection to the cable distribution system.	N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	No connection to the cable distribution system.	N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system	No connection to the cable distribution system.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
7.4	Insulation between primary circuits and cable distribution systems	No connection to the cable distribution system.	N/A
7.4.1	General	No connection to the cable distribution system.	N/A
7.4.2	Voltage surge test	No connection to the cable distribution system.	N/A
7.4.3	Impulse test	No connection to the cable distribution system.	N/A

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)	The mass of the EUT is less than 18 kg.	N/A
A.1.1	Samples		—
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements	No motor used	N/A
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N/A
B.3	Maximum temperatures	(see appended table 5.3)	N/A
B.4	Running overload test	(see appended table 5.3)	N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors	(see appended table 5.3)	N/A
B.9	Test for three-phase motors	(see appended table 5.3)	N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		—
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N/A
	Position	No such component	—
	Manufacturer		—
	Type		—
	Rated values		—
	Method of protection		—
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings		N/A
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		N/A
D.1	Measuring instrument	Class III equipemt	N/A
D.2	Alternative measuring instrument		N/A
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		N/A
G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances	Not used	N/A
G.1.1	General		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A

H	ANNEX H, IONIZING RADIATION (see 4.3.13)	N/A
----------	---	-----

J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)	N/A
	Metal(s) used	—

K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity	No thermal control in the EUT	N/A
K.2	Thermostat reliability; operating voltage (V) :		N/A
K.3	Thermostat endurance test; operating voltage (V) :		N/A
K.4	Temperature limiter endurance; operating voltage (V) :		N/A
K.5	Thermal cut-out reliability		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

K.6	Stability of operation		N/A
-----	------------------------	--	-----

L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		P
L.1	Typewriters	No such device	N/A
L.2	Adding machines and cash registers	No such device	N/A
L.3	Erasers	No such device	N/A
L.4	Pencil sharpeners	No such device	N/A
L.5	Duplicators and copy machines	No such device	N/A
L.6	Motor-operated files	No such device	N/A
L.7	Other business equipment	Considered, see operation condition under “Summary of testing”.	P

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction	No phone ringing was generated in the EUT.	N/A
M.2	Method A	No phone ringing was generated in the EUT.	N/A
M.3	Method B	No phone ringing was generated in the EUT.	N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage	No phone ringing was generated in the EUT.	N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A

N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
----------	--	--	------------

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098

Fax: +86 769 8599 1080

Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
N.1	ITU-T impulse test generators	Not used.	N/A
N.2	IEC 60065 impulse test generator	Not used.	N/A
P	ANNEX P, NORMATIVE REFERENCES		—
Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
	- Preferred climatic categories	Not used.	N/A
	- Maximum continuous voltage	Not used.	N/A
	- Combination pulse current	Not used.	N/A
	Body of the VDR Test according to IEC60695-11-5.....	Not used.	N/A
	Body of the VDR. Flammability class of material (min V-1).....	Not used.	N/A
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)	Not used.	N/A
R.2	Reduced clearances (see 2.10.3)	Not used.	N/A
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
S.1	Test equipment	Not used.	N/A
S.2	Test procedure	Not used.	N/A
S.3	Examples of waveforms during impulse testing	Not used.	N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
		IPX0 product.	—
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
			—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
V.1	Introduction	Not connected to ac mains directly.	N/A
V.2	TN power distribution systems		N/A
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits	No touch current summation.	N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current	No such component.	N/A
X.2	Overload test procedure	No such component.	N/A
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus	Not used.	N/A
Y.2	Mounting of test samples	Not used.	N/A
Y.3	Carbon-arc light-exposure apparatus	Not used.	N/A
Y.4	Xenon-arc light exposure apparatus	Not used.	N/A
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N/A
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
BB	ANNEX BB, CHANGES IN THE SECOND EDITION		—
CC	ANNEX CC, Evaluation of integrated circuit (IC) current limiters		N/A
CC.1	General		N/A
CC.2	Test program 1.....		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
CC.3	Test program 2.....:		N/A
CC.4	Test program 3.....:		N/A
CC.5	Compliance.....:		N/A

DD	ANNEX DD, Requirements for the mounting means of rack-mounted equipment		N/A
DD.1	General	No such construction.	N/A
DD.2	Mechanical strength test, variable N.....:	No such construction.	N/A
DD.3	Mechanical strength test, 250N, including end stops.....:	No such construction.	N/A
DD.4	Compliance.....:	No such construction.	N/A

EE	ANNEX EE, Household and home/office document/media shredders		N/A
EE.1	General	No such device in the EUT.	N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols.....:		N/A
	Information of user instructions, maintenance and/or servicing instructions.....:		N/A
EE.3	Inadvertent reactivation test.....:		N/A
EE.4	Disconnection of power to hazardous moving parts:		N/A
	Use of markings or symbols.....:		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A)		N/A
	Test with wedge probe (Figure EE1 and EE2)		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to	EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013
Attachment Form No.	EU_GD_IEC60950_1G
Attachment Originator	SGS Fimko Ltd
Master Attachment	Date 2014-02
Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and it's amendmets are prefixed "Z"		P
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
(A2:2013)			
General	Delete all the "country" notes in the reference document (IEC 60950-1:2005) according to the following list: 1.4.8 Note 2 1.5.1 Note 2 & 3 1.5.7.1 Note 1.5.8 Note 2 1.5.9.4 Note 1.7.2.1 Note 4, 5 & 6 2.2.3 Note 2.2.4 Note 2.3.2 Note 2.3.2.1 Note 2 2.3.4 Note 2 2.6.3.3 Note 2 & 3 2.7.1 Note 2.10.3.2 Note 2 2.10.5.13 Note 3 3.2.1.1 Note 3.2.4 Note 3. 2.5.1 Note 2 4.3.6 Note 1 & 2 4.7 Note 4 4.7.2.2 Note 4.7.3.1Note 2 5.1.7.1 Note 3 & 4 5.3.7 Note 1 6 Note 2 & 5 6.1.2.1 Note 2 6.1.2.2 Note 6.2.2 Note 6.2.2.1 Note 2 6.2.2.2 Note 7.1 Note 3 7.2 Note 7.3 Note 1 & 2 G.2.1 Note 2 Annex H Note 2		P

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
General (A1:2010)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note		P
General (A2:2013)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: 2.7.1 Note * 2.10.3.1 Note 2 6.2.2. Note * Note of secretary: Text of Common Modification remains unchanged.		P
1.1.1 (A1:2010)	Replace the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.		N/A
1.3.Z1 (A12:2011)	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for “one package equipment”, and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.	Not such equipment	N/A
	In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010		N/A

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.1 (Added info*)	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC. New Directive 2011/65/11 *	Added	N/A
1.7.2.1 (A1:2010)	In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.	Not such equipment	N/A
1.7.2.1 (A12:2011)	In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments.		N/A
	Zx Protection against excessive sound pressure from personal music players		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.1 General</p> <p>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none">is designed to allow the user to listen to recorded or broadcast sound or video; andprimarily uses headphones or earphones that can be worn in or on or around the ears; andallows the user to walk around while in use. <p>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none">while the personal music player is connected to an external amplifier; orwhile the headphones or earphones are not used. <p>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none">hearing aid equipment and professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p>	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015.</p> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>	Not such equipment	N/A
	<p>Zx.2 Equipment requirements</p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none">equipment provided as a package (personal music player with its listening device), where the acoustic output $L_{Aeq,T}$ is ≤ 85 dBA measured while playing the fixed “programme simulation noise” as described in EN 50332-1; anda personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” as described in EN 50332-1. <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ul style="list-style-type: none">a) protect the user from unintentional acoustic outputs exceeding those mentioned above; andb) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average sound pressure of the song is not above the basic limit of 85 dBA, the warning does not need to be given as long as the average sound pressure of the song is not above the basic limit of 85 dBA.</p>	Not such equipment	N/A

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Shengli Road, Shengli Community, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.3 Warning</p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none">the symbol of Figure 1 with a minimum height of 5 mm; andthe following wording, or similar: <p>“To prevent possible hearing damage, do not listen at high volume levels for long periods.”</p> <div data-bbox="584 889 849 1151"></div> <p>Figure 1 – Warning label (IEC 60417-6044)</p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>	Not such equipment	N/A
	<p>Zx.4 Requirements for listening devices (headphones and earphones)</p>		N/A
	<p>Zx.4.1 Wired listening devices with analogue input</p> <p>With 94 dBA sound pressure output $L_{Aeq,T}$, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be ≥ 75 mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.4.2 Wired listening devices with digital input With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>	Not such equipment	N/A
	<p>Zx.4.3 Wireless listening devices In wireless mode: with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>	Not such equipment	N/A
	<p>Zx.5 Measurement methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;	Class III equipment	N/A
	c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.	Class III equipment	N/A
2.7.2	This subclause has been declared 'void'.		N/A
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1									
Clause	Requirement – Test	Result - Remark	Verdict						
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)									
Clause	Requirement + Test	Result - Remark	Verdict						
3.2.5.1	<p>Replace “60245 IEC 53” by “H05 RR-F”; “60227 IEC 52” by “H03 VV-F or H03 VVH2-F”; “60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”.</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td>Up to and including 6 </td><td>0,75 ^{a)} </td></tr><tr><td>Over 6 up to and including 10 (0,75) ^{b)}</td><td>1,0 </td></tr><tr><td>Over 10 up to and including 16 (1,0) ^{c)}</td><td>1,5 </td></tr></table> <p>In the conditions applicable to Table 3B delete the words “in some countries” in condition ^{a)}.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>	Up to and including 6	0,75 ^{a)}	Over 6 up to and including 10 (0,75) ^{b)}	1,0	Over 10 up to and including 16 (1,0) ^{c)}	1,5	No power cord used	N/A
Up to and including 6	0,75 ^{a)}								
Over 6 up to and including 10 (0,75) ^{b)}	1,0								
Over 10 up to and including 16 (1,0) ^{c)}	1,5								
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD	No power cord used	N/A						
3.3.4	<p>In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following:</p> <table><tr><td>Over 10 up to and including 16 1,5 to 2,5 1,5 to 4 </td></tr></table> <p>Delete the fifth line: conductor sizes for 13 to 16 A</p>	Over 10 up to and including 16 1,5 to 2,5 1,5 to 4	No power cord used	N/A					
Over 10 up to and including 16 1,5 to 2,5 1,5 to 4									
4.3.13.6 (A1:2010)	<p>Replace the existing NOTE by the following:</p> <p>NOTE Z1 Attention is drawn to:</p> <p>1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and</p> <p>2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).</p>	Added	N/A						
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.	Added	N/A						

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.	Replaced	N/A
Bibliography	Additional EN standards.	Added	—

ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	—
-----------	--	---

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.	Class III equipment	N/A
1.2.13.14 (A11:2009)	In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.	Not connected to cable distribution system	N/A
1.5.7.1 (A11:2009)	In Finland , Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.	Class III equipment	N/A
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	Not such component	N/A
1.5.9.4	In Finland , Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.	Not such component	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1	<p>In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>	Class III equipment	N/A
1.7.2.1 (A11:2009)	<p>In Norway and Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>"Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."</p>		

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>	Class III equipment	N/A
1.7.2.1 (A2:2013)	<p>In Denmark, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in Denmark shall be as follows: In Denmark: “Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.”</p>	Class III equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.5 1.7.5 (A11:2009)	In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a. For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.	No such socket-outlet	N/A
1.7.5 (A2:2013)	In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011. For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a. Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b. Justification the Heavy Current Regulations, 6c	No such socket-outlet	N/A
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.	No TNV circuit	N/A
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.	No TNV circuit	N/A
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.	No TNV circuit	N/A
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.	Class III equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.	Class III equipment	N/A
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.	No such part	N/A
3.2.1.1	<p>In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A</p> <p>SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A</p> <p>SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <p>SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A</p> <p>SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A</p> <p>SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V, 16 A</p>	No power cord used	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>	No power cord used	N/A
3.2.1.1 (A2:2013)	<p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Justification the Heavy Current Regulations, 6c</p>	No power cord used	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>	No power cord used	N/A
3.2.1.1	<p>In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>	No power cord used	N/A
3.2.1.1	<p>In Ireland, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.</p>	No power cord used	N/A
3.2.4	<p>In Switzerland, for requirements see 3.2.1.1 of this annex.</p>	No appliance inlet used	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.5.1	In the United Kingdom , a power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A.	No power cord used	N/A
3.3.4	In the United Kingdom , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: <ul style="list-style-type: none">• 1,25 mm² to 1,5 mm² nominal cross-sectional area.	No power cord used	N/A
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.	Not such equipment	N/A
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.7.1	<p>In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment:</p> <ul style="list-style-type: none">• STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON;• STATIONARY PLUGGABLE EQUIPMENT TYPE B;• STATIONARY PERMANENTLY CONNECTED EQUIPMENT.	Not such equipment	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	<p>In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none">- two layers of thin sheet material, each of which shall pass the electric strength test below, or- one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none">- passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and- is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.	Not connected to the telecommunication network.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none">- the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1;- the additional testing shall be performed on all the test specimens as described in EN 60384-14;- the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.	Not connected to the telecommunication network.	N/A
6.1.2.2	In Finland, Norway and Sweden , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.	Not connected to the telecommunication network.	N/A
7.2	In Finland, Norway and Sweden , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.	Not cable distribution systems inside the EUT.	N/A

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
7.3 (A11:2009)	In Norway and Sweden , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.	Not cable distribution systems inside the EUT.	N/A

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:
customerservice.dg@cn.bureauveritas.com



Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

**Annex ZD
(informative)**

IEC and CENELEC code designations for flexible cords

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components					p
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾	
Plastic enclosure	CHI MEI CORPORATION	PA-747(+)	ABS, HB, 80°C Required thickness 1.5mm, Measured min. 1.5mm	UL 94	UL	
PCB	SHANDONG JINBAO ELECTRONICS CO LTD	ZD-90F	V-0, 130°C	UL 746E	UL	
Or	Interchangeable	Interchangeable	V-0, 130°C	UL 746E or UL 94	UL	
- Description: Interchangeable based on standardized dimensions and specified rating.						
IC(U2)	INJOINIC TECHNOLOGY	IP5305	V _{IN} : 4.75V to 5.5V V _{TRGT} : 4.16V to 4.24V V _{TRKL} : 2.9V to 3.1V V _{BAT} : 3.0V to 4.2V T _J : -40°C to 150°C	EN 60950-1	Test with appliance	
IC(U1)	INJOINIC TECHNOLOGY	IP3012	V _{DD} : -0.3V to 7V V _M : -3 V to 6V T _J : -40°C to 150°C	EN 60950-1	Test with appliance	
Battery pack	Guangzhou Great Power Energy & Technology Co., Ltd	GSP103040	3.7V, 1200mAh, 4.4Wh Max. Charging current is 600mA, max discharged current is 1200mA	IEC 61233-2:2017	Report no: BAT200106 N043 issued by Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch dated on March 09, 2020.	
Supplementary information:						
¹⁾ An asterisk indicates a mark which assures the agreed level of surveillance						

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

1.6.2	TABLE: Electrical data (in normal conditions)					P
U (V)	I (mA)	I _{rated} (mA)	P (W)	Fuse #	I _{fuse} (A)	Condition/status
5.0Vdc	780	1000	3.9	--	--	Supplied by external DC source. The EUT was off mode, only empty battery was charging.
3.7Vdc	1160	--	4.3	--	--	Supplied by internal full charged battery. The output terminals loaded max 5Vdc, 1.0A.
Supplementary information:						

2.1.1.5 c) 1)	TABLE: max. V, A, VA test				P
Voltage (rated) (V)		Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)
Output terminals		1.0	5.12Vdc	1.57	6.2
supplementary information:					

2.1.1.5 c) 2)	TABLE: stored energy			N/A
Capacitance C (μF)		Voltage U (V)	Energy E (J)	
--		--	--	
supplementary information:				

2.1.1.7	TABLE: discharge test				N/A
Condition	τ calculated (s)	τ measured (s)	t u→0V	Comments	
--	--	--	--	--	
supplementary information:					

2.2	TABLE: evaluation of voltage limiting components in SELV circuits			N/A
Component (measured between)		max. voltage (V) (normal operation)	Voltage Limiting Components	

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict
		V peak	V d.c.
--		--	--
Fault test performed on voltage limiting components	Voltage measured (V) in SELV circuits (V peak or V d.c.)		
--	--		
supplementary information:			

2.4	TABLE: limited current circuit measurement				N/A
Location		Voltage (V)	Current (mA)	Comments	
--		--	--	--	
supplementary information:					

2.5	TABLE: limited power sources			P
Circuit output tested:				
Measured Uoc (V) with all load circuits disconnected:				
	Isc (A)		VA	
	Meas.	Limit	Meas.	Limit
Output terminals: normal (5.12Vdc)	1.57	≤ 8.0	6.2	≤ 100
Output terminals: C3 shorted (0Vdc)	0	≤ 8.0	0	≤ 100
Output terminals: U2 Pin1-2 short shorted (5.12Vdc)	1.57	≤ 8.0	6.2	≤ 100
Output terminals: U2 Pin1-8 short shorted (0Vdc)	0	≤ 8.0	0	≤ 100
supplementary information:				
Sc=Short circuit, Oc=Open circuit				

2.6.3.4 and 2.6.1	TABLE: ground continue test			N/A
Location		resistant measures (Ω)	comments	
--		--	--	
supplementary information:				

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

2.10.2	Table: working voltage measurement				N/A
Location		RMS voltage (V)	Peak voltage (V)	Comments	
--		--	--	--	
supplementary information:					
--					

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						N/A
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
--	--	--	--	--	--	--	--
Basic/supplementary:							
--	--	--	--	--	--	--	--
Reinforced:							
--	--	--	--	--	--	--	--
Supplementary information:							

2.10.5	TABLE: Distance through insulation measurements						N/A
Distance through insulation (DTI) at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)		
--	--	--	--	--	--	--	--
Supplementary information:							

4.3.8	TABLE: Batteries								P
The tests of 4.3.8 are applicable only when appropriate battery data is not available					--				--
Is it possible to install the battery in a reverse polarity position?					No				N/A
			Non-rechargeable batteries		Rechargeable batteries				
			Discharging		Un-intentional charging	Charging		Discharging	Reversed charging
			Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



Test Report No.: LD200113N010

IEC/EN 60950-1							
Clause	Requirement – Test			Result - Remark			Verdict

Supplied by external DC source. The EUT was off mode, only empty battery was charging.

Max. current during normal condition	--	0.57 A	0.6 A (Max.)	--	--	--	--
Max. current during fault condition(U2 pin1-6 Shorted)	--	0.57 A	0.6 A (Max.)	--	--	--	--
Max. current during fault condition(Q1 pin D-S Shorted)	--	0.57 A	0.6 A (Max.)				
Max. current during fault condition(Q1 pin D-G Shorted)	--	0.57 A	0.6 A (Max.)				
Max. current during fault condition(U1 pin1-5 Shorted)	--	0.56 A	0.6 A (Max.)	--	--	--	--

Supplied by internal full charged battery. The output terminals loaded max 5Vdc, 1.0A.

Max. current during normal condition	--	--	--	1.14 A	1.2 A (Max.)	--	--
Max. current during fault condition(U1 pin1-5 Shorted)	--	--	--	1.16 A	1.2 A (Max.)	--	--

Test results:		Verdict
- Chemical leaks	No chemical leaks.	P
- Explosion of the battery	No explosion.	P
- Emission of flame or expulsion of molten metal	No emission of flame or expulsion of molten metal	P
- Electric strength tests of equipment after completion of tests	No isolation requirement.	N/A

Supplementary information:

4.3.8	TABLE: Batteries	
Battery category.....: Rechargeable Li-ion Cell		
Manufacturer.....: Guangzhou Great Power Energy & Technology Co., Ltd		
Type / model.....: GSP103040		

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1


Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Voltage.....: 3.7V

Capacity.....: 1200mAh

Tested and Certified by (incl. Ref. No.).....: Report no: BAT200106N043 issued by Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch dated on March 09, 2020.

Circuit protection diagram: See below

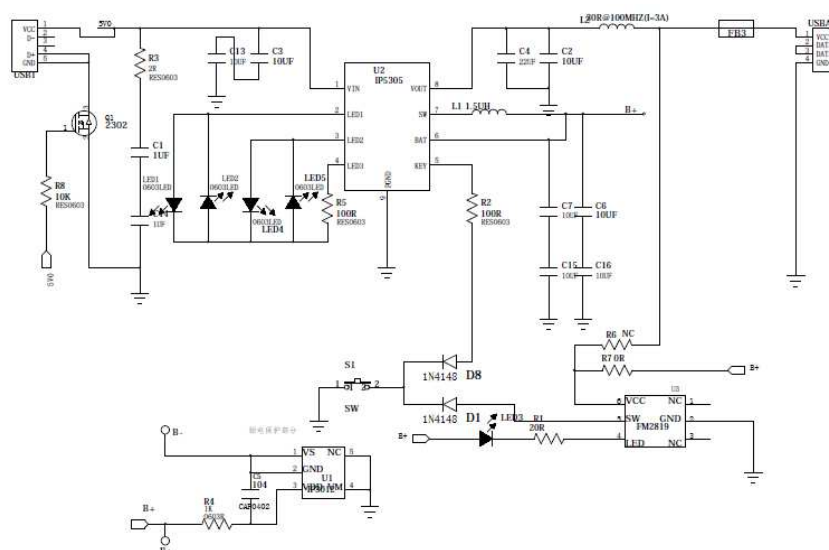

MARKINGS AND INSTRUCTIONS (1.7.13)

Location of replaceable battery	--
Language(s)	--
Close to the battery	No
In the servicing instructions	N/A
In the operating instructions	N/A

4.5	TABLE: Thermal requirements						
	Supply voltage (V)	5.0Vdc	3.7Vdc	--	--	--	---
	Ambient T _{min} (°C)	45.0	45.0	--	--	--	---
	Ambient T _{max} (°C)	45.0	45.0	--	--	--	---
Maximum measured temperature T of part/at::		T (°C)					Allowed Tmax (°C)
Calculated value for Tma:		--	--	--	--	--	--

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1						
Clause	Requirement – Test			Result - Remark		Verdict

Ambient temperature during test (Tamb):	--	--	--	--	--	--
PCB near U1	63.2	78.3	--	--	--	130
PCB near U2	59.0	72.5	--	--	--	130
L1 winding	70.8	83.6	--	--	--	130
Battery body	48.6	49.7	--	--	--	--
Button surface	46.3	46.8	--	--	--	95
Enclosure inside near U1	52.1	55.4	--	--	--	80
Enclosure outside near U1	46.0	48.8	--	--	--	95

Supplementary information:

Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed Tmax (°C)	Insulation class
--	--	--	--	--	--	--	--

Supplementary information:

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm) : ≤ 2 mm			—
Part		Test temperature (°C)	Impression diameter (mm)	
--		--	--	

Supplementary information:

4.6	TABLE: Openings in enclosures			P
Location		dimensions	Comments	
--		--	--	

Supplementary information: see clause 4.6

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1			
Clause	Requirement – Test	Result - Remark	Verdict

4.7	TABLE: Resistance to fire					N/A
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
--	--	--	--	--	--	
Supplementary information:						
1) Openings that do not exceed 5 mm in any dimension						
2) Openings that do not hazardous voltage and energy hazard within 5° vertical projection.						
3) Metal bottoms of fire enclosures conforming to the dimensional limits of any line in Table 4D.						

5.1	TABLE: touch current measurement			N/A
Measured between:	Measured (Ma)	Limit (Ma)	Comments/conditions	
supplementary information:				

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			N/A
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Functional:				
--		--	--	--
Basic/supplementary:				
--		--	--	--
Reinforced:				
--		--	--	--
Supplementary information:				

5.3	TABLE: Fault condition tests			P
	Ambient temperature (°C)	25.0		—
	Power source for EUT: Manufacturer, model/type, output rating	--		—

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: LD200113N010

IEC/EN 60950-1

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Supplied by external DC source. The EUT was off mode, only empty battery was charging.						
Normal	Over charging	5.0Vdc	7.0hours	--	--	Unit work as normal. After testing, no damage, no hazard. Battery charging current was max 0.57A.
Q1 pinG-S	Shorted	5.0Vdc	30mins	--	--	Unit shutdown immediately and recoverable. After testing, no damage, no hazard.
Q1 pinG-D	Shorted	5.0Vdc	7.0hours	--	--	Unit work as normal. After testing, no damage, no hazard. Battery charging current was max 0.57A.
Q1 pinD-S	Shorted	5.0Vdc	7.0hours	--	--	Unit work as normal. After testing, no damage, no hazard. Battery charging current was max 0.57A.
U2 pin1-6	Shorted	5.0Vdc	7.0hours	--	--	Unit shutdown immediately and unrecoverable. After testing, no damage, no hazard. Battery charging current was max 0.57A.
U1 pin2-3	Shorted	5.0Vdc	30mins	--	--	Unit shutdown immediately and unrecoverable. After testing, no damage, no hazard.
U1 pin2-3	Shorted	5.0Vdc	7.0hours	--	--	Unit shutdown immediately and unrecoverable. After testing, no damage, no hazard. Battery charging current was max 0.56A.
Supplied by internal fully charged battery. The output terminals loaded max 5Vdc, 1.0A.						
U2 pin7-8	Shorted	3.7Vdc	30mins	--	--	Unit shutdown immediately and unrecoverable. After testing, no damage, no hazard.
U1 pin2-3	Shorted	3.7Vdc	30mins	-	-	Unit shutdown immediately and unrecoverable. After testing, no damage, no hazard.
U1 pin1-5	Shorted	3.7Vdc	7.0hours	-	-	Unit work as normal. After testing, no damage, no hazard. After testing, no damage, no hazard. Battery discharge current was max 1.14A.
Output	Shorted	3.7Vdc	30mins	-	-	Unit shutdown immediately and recoverable. After testing, no damage, no hazard.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China

Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**


Test Report No.: LD200113N010

IEC/EN 60950-1							
Clause	Requirement – Test					Result - Remark	Verdict
Output	Overload	3.7Vdc	1.5hours	-	-	Output port current overloaded to 1.50A, unit shutdown when the output current increase to 1.52A. After testing, no damage, no hazard.	
Supplementary information:							


C.2	TABLE: transformers							N/A
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)	
--	--	--	--	--	--	--	--	
Loc.	Tested insulation			Test voltage/ V	Measure d clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers	
--	-			--	--	--	--	
supplementary information:								

C.2	TABLE: transformers	N/A

Test Report No.: LD200113N010

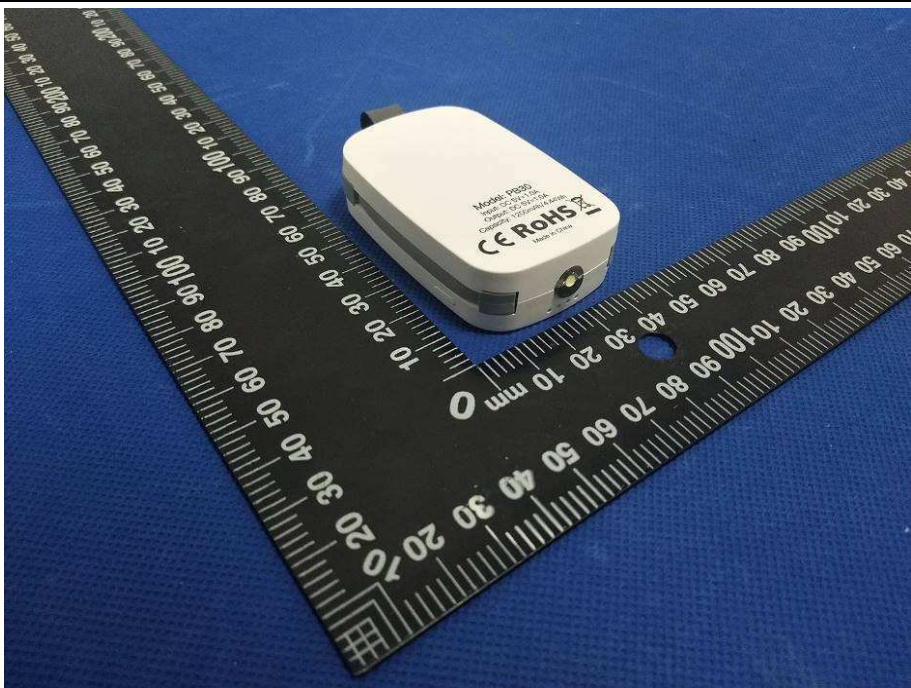

General view -1

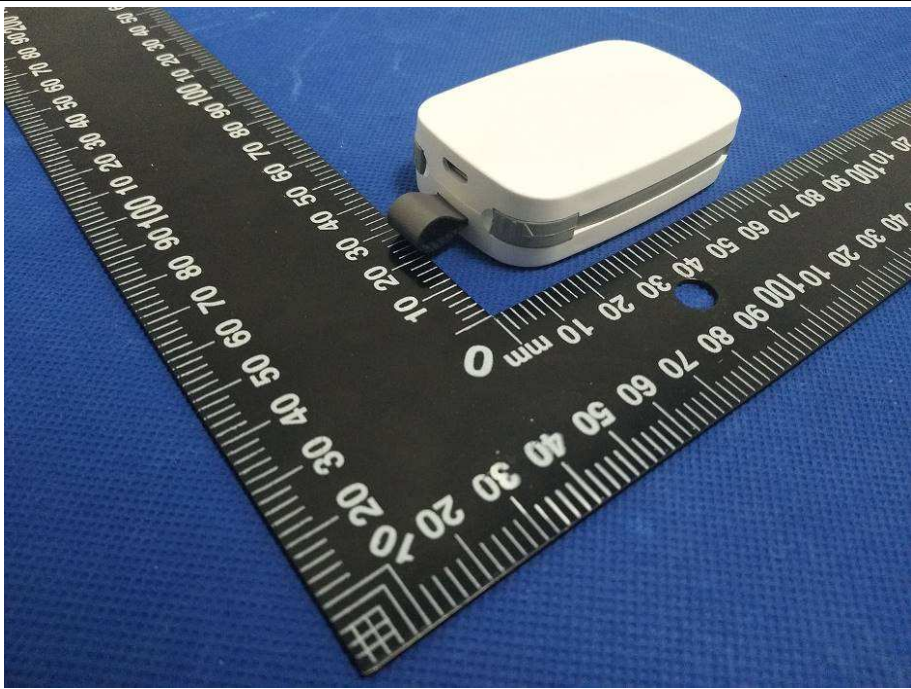

General view -2


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China


Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com

Test Report No.: LD200113N010

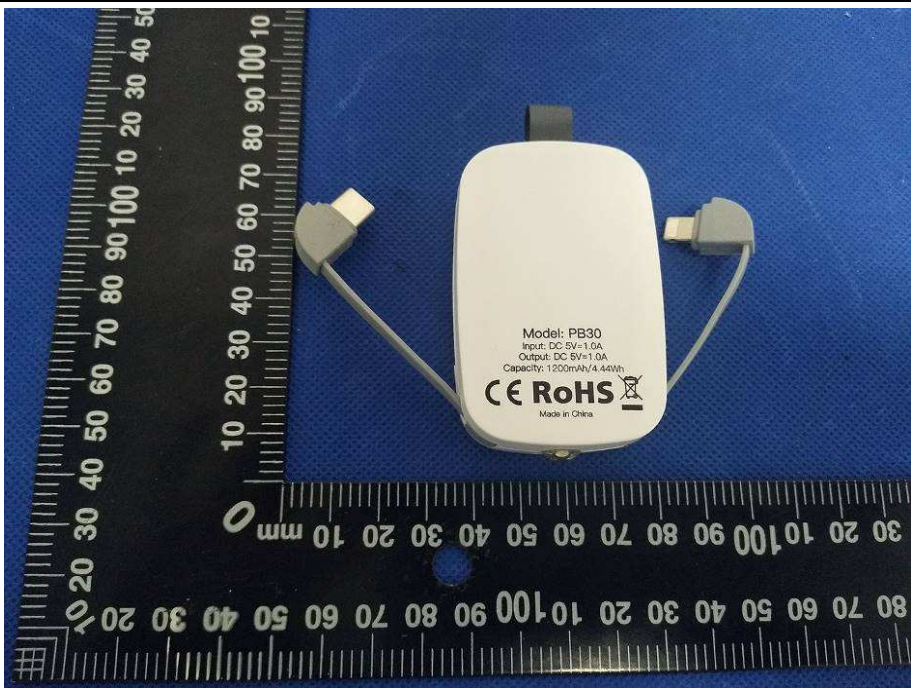

General view -3

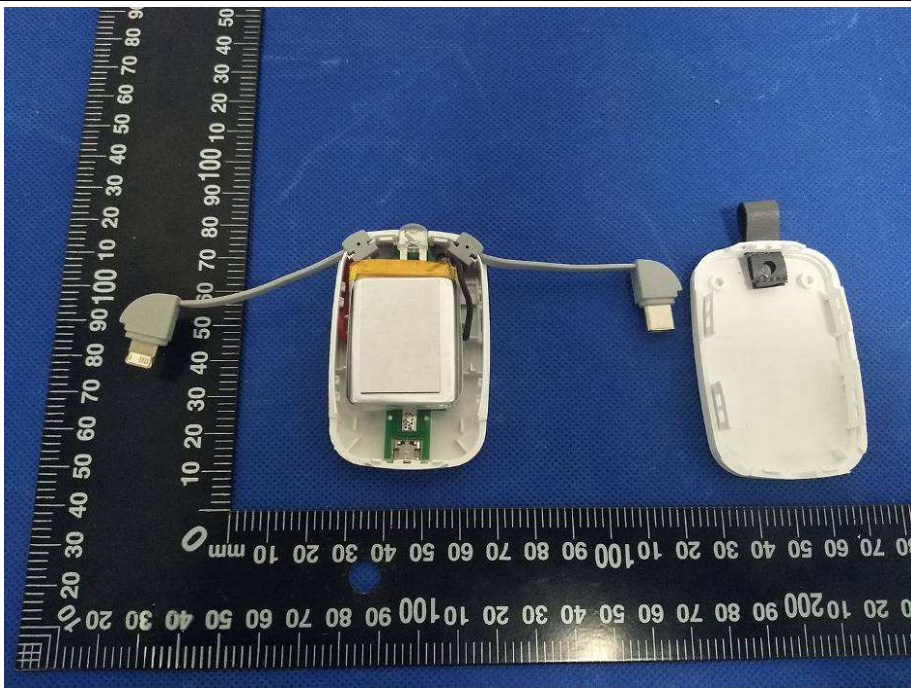

Internal view -1


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City, Guangdong
523942, China


Tel: +86 769 8998 2098
Fax: +86 769 8599 1080
Email:

customerservice.dg@cn.bureauveritas.com

Test Report No.: LD200113N010

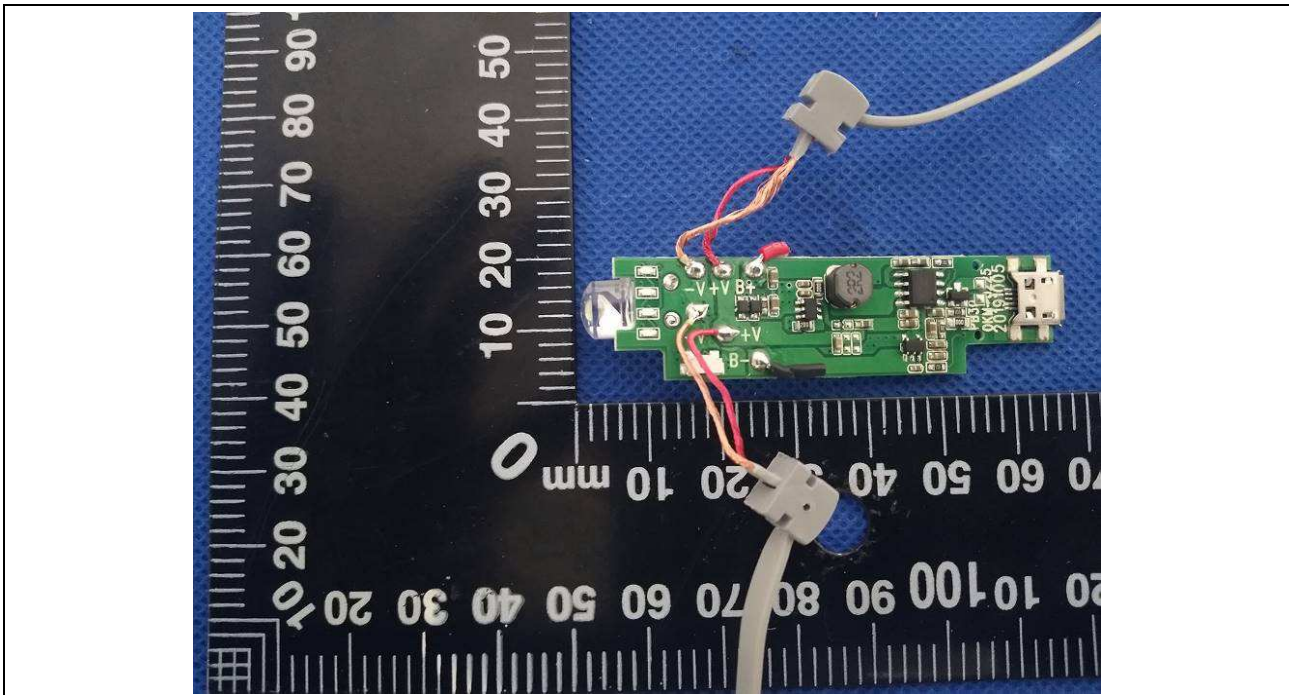

PCB board view - 1

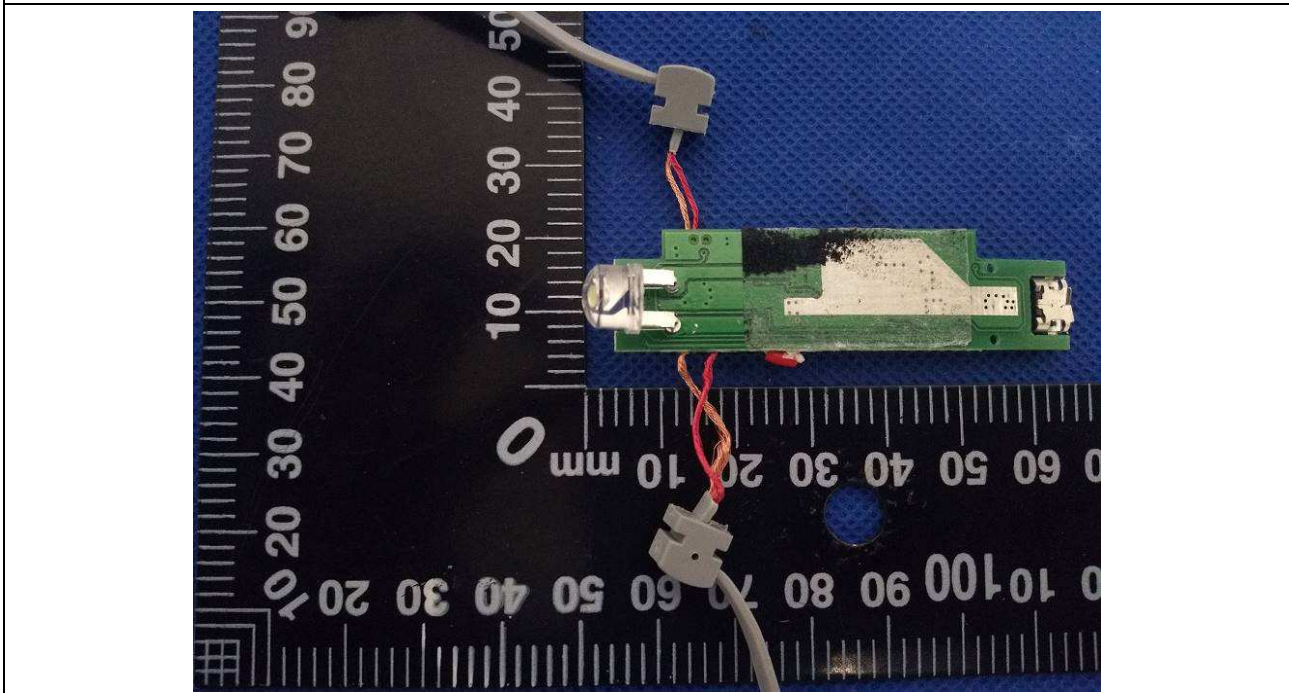

PCB board view - 2

Test Report No.: LD200113N010

